
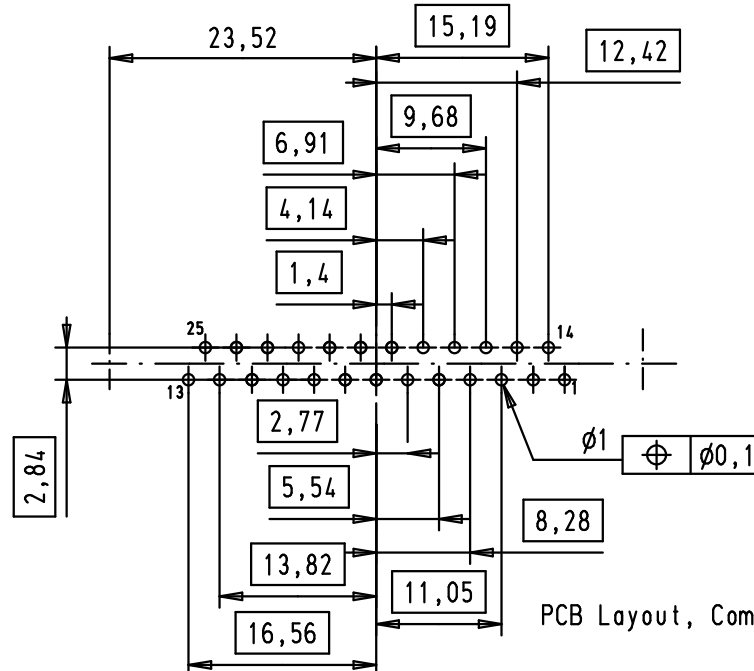


SPECIFICATION

Filter type	C
Performance level	PL2
Capacitance	3900pf±20%
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION (dB)
5	6dB
10	11dB
50	25dB
100	35dB
500	35dB
1000	32dB

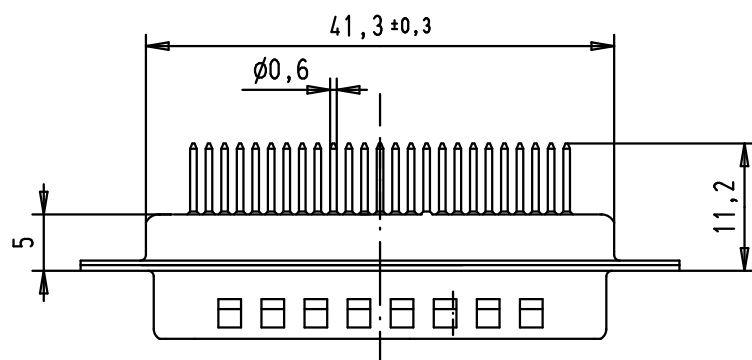

PCB Layout, Component side

				Dot.	Name	 All Dim. in mm Orig. Size DIN A 4
			Detail.	8-JUL-02	CV	
			Insp.	09/12/11	JB	
36283	09/12/11	SD	Stand.			
31589	13/01/04	AF	HARTING EURL F-95972 Paris			
31058	8-JUL-02	CV				
Mod.	Dot.	Name				

D-Sub, male, straight,
25 Poles, with turned
solder pin and hole

Mo?Mstab/ <i>Scale</i>	1.5:1
---------------------------	-------

TB 09643227240

Blatt/ Page
3 / 4

Sub.