

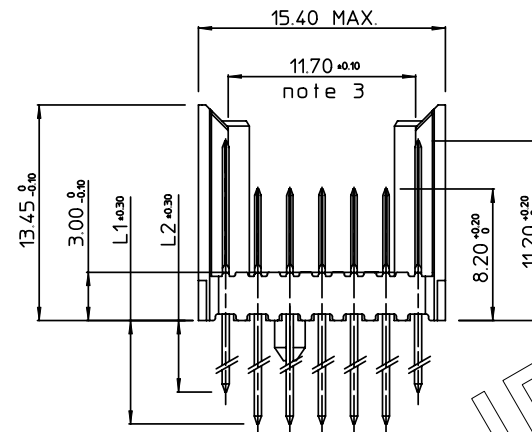


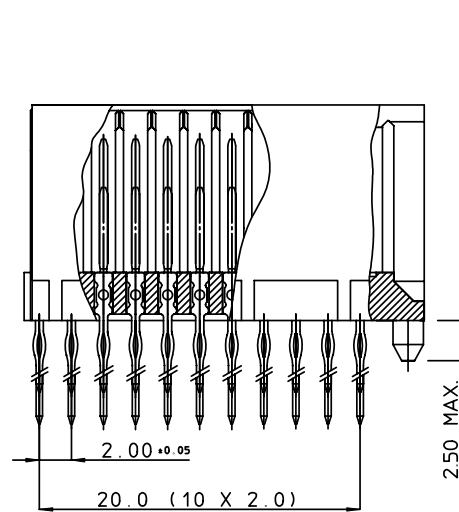


PERFORMANCE CHARACTERISTICS

CURRENT RATING : 1.5 A AT 20°C (FULLY LOADED)
CURRENT RATING : 1 A AT 70°C (FULLY LOADED)
RATED VOLTAGE : 500 V AC (CONT / CONT)
OPERATING TEMPERATURE : -55°C TO 125°C
CONTACT RESISTANCE : 20 mΩ MAX
INSERTION FORCE : 0.75 N MAX / CONT
EXTRACTION FORCE : 0.15 N MIN / CONT
INSULATION RESISTANCE : 10⁴ MΩ MIN

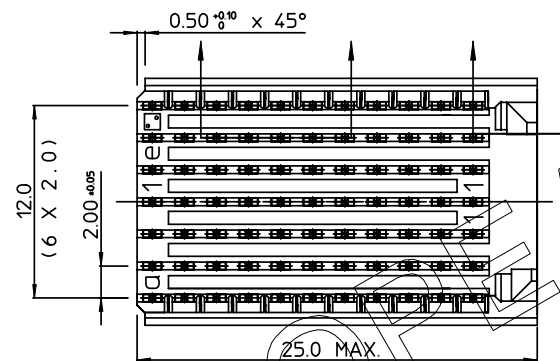

LAY-OUT
P.C.B. - HOLE



NOTES

1. *HM2P09P#5111*
PERFORMANCE LEVEL INDICATOR
(REFER DWG No. BS,C ,201844,003)
LEAD FREE INDICATOR : LF=LEAD FREE
(DIGIT 15&16)
2. THIS PRODUCT IS CSA APPROVED.
THIS PRODUCT IS UL RECOGNIZED.
3. MEASURED AT THE BOTTOM.
4. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING : BS,A ,201572,001
5. THE PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

MALE SIGNAL STRAIGHT PRESS-FIT-TO-BOARD CONNECTOR

EXTENSION MODULE (WIDE BODY)

1DEC ±0.2 2DEC ±0.1 ANGLES ±1°	APPR. DRAFT CHECKED	DATE 1994-05-17	SIGN. W.Panis	MILLIPACS 2 / TYPE C / SHIELDED
WE RESERVE THE RIGHT TO CHANGE DIMENSIONS OR REQUIREMENTS WITHOUT PRIOR NOTICE.	PROD. MGR. PR.ENG. MGR. PR.MGT. MGR.			CAT. No. HM2P09P#5111----
ALL DIMENSIONS IN MM				FCI www.fciconnect.com

REFERENCES



BS,C ,201632,009

C

PDM: Rev:C

STATUS: Released

DRAWING No. CUSTOMER DRAWING REVISION
Printed: Dec 01, 2007