

M12 Field Attachable Connectors (Stainless Steel Hardware)

RSCWN | RKCWN




Male, 4- and 5-Pole (90°)

Field attachable connector, M12 male right angle connector, 4- and 5-pole with stainless steel hexagon threaded joint, assembling with screw terminals.

– especially designed for use in food processing equipment –

RSCWN

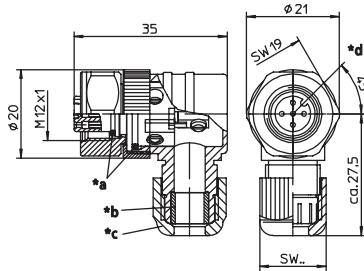

- *a O-Ring
- *b gasket
- *c cap nut
- *d insert 90° rotatable


Female, 4- and 5-Pole

Field attachable connector, M12 female right angle connector, 4- and 5-pole with stainless steel hexagon threaded joint, assembling with screw terminals.

– especially designed for use in food processing equipment –



RKCWN

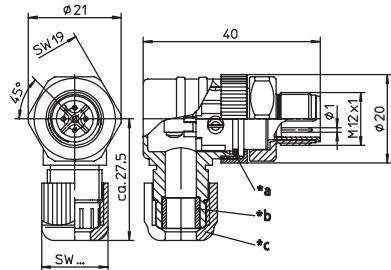


- *a O-Ring
- *b gasket
- *c cap nut


Pin Assignments

Face Views / M12, Male / Female

4 pole



5 pole





Be Certain with Belden

M12 Field Attachable Connectors (Stainless Steel Hardware)

RSCWN | RKCWN

Technical Data

Environmental

Degree of protection	IP 67 / NEMA 6P
Operating temperature range	-25°C (-13°F) / +85°C (+185°F)

Mechanical

Housing / Molded body	PBT
Insert	PBT
Contact	CuZn, pre-coppered, CuSnZn 8-poles pre-nickelized, gold-plated
Receptacle shell	stainless steel
O-ring	FKM
Mode of connection	Screw terminals
Connectable conductor	4–5 poles max. 0.75 mm ² 8 poles max. 0.50 mm ²

Electrical

Contact resistance	≤ 5 mΩ
Nominal current at 40°C	4–5 poles 4 A 8 poles 2 A
Nominal voltage	4 poles 240 V 5 poles 60 V 8 poles 30 V
Rated voltage	4 poles 250 V 5 poles 63 V 8 poles 36 V
Test voltage	4 poles 2.0 kV eff. / 60 s 5 poles 1.5 kV eff. / 60 s 8 poles 0.9 kV eff. / 60 s
Insulation resistance	> 109 Ω
Pollution degree	3

Part Number	Male	Female	Pins	Cable Diameter Range	Characteristics		
					Field Attachable Connectors		
RSCWN 4/7	RKCWN 4/7		4	Ø 3.0-6.5 mm /SW 15			
RSCWN 4/9	RKCWN 4/9			Ø 4.0-8.0 mm /SW 19			
RSCWN 5/7	RKCWN 5/7		5	Ø 3.0-6.5 mm /SW 15			
RSCWN 5/9	RKCWN 5/9			Ø 4.0-8.0 mm /SW 19			