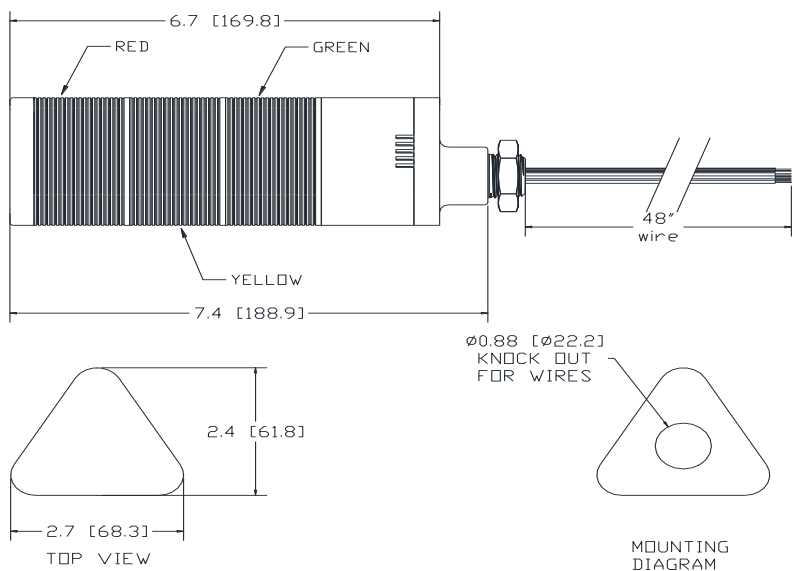


Mallory			Mallory Sonalert Products, Inc.			Part #:			JT028-RYG-CDL		
Sales Outline Drawing						Revision:			C		
Specifications:											
Stack Number:		1		2		3					
LED Color:		RED		YELLOW		GREEN					
Connection Wires:		Red and Brown		Yellow and Brown		Green and Brown					
LED Current Draw:		<50 mA		<60 mA		<40 mA					
Rated Voltage:		24 VAC/DC									
Operating Voltage:		20-28 VAC/DC									
Sound Level Category:		Loud		Loud		Loud				Loud	
Mode of Operation:		Continuous		Medium Pulse (5PPS)		Double Pulse (0.5PPS)				Continuous for 5 sec then 0.1s beep until reset	
Connection:		Black and Gray Wires		Black and Gray Wires; Orange wire connected to		Black and Gray Wires; Purple wire connected to Green/Yellow wire				Black and Gray wires; Orange and Purple wires connected to Green/Yellow wire	
Sound Current Draw:		40mA Max.		40mA Max.		40mA Max.				40mA Max.	
Loudness @ 1m:		80-85 dB(A) Typ.									
Frequency:		2000 ± 500 Hz									
Total Max Current:		<190mA with all LED's and sound unit working									
Operating Temperature:		-25° ~ +60°C									
Lens Color:		Opaque White									
Material:		ABS FR15U									
Mounting Method:		Direct Mount using 1/2" NPT Stainless Steel Pipe and Nut									
Weight Typical (g):		360									
NEMA 12:		Approved									
Options:		Please contact factory.									
Dimensions:			Inches (mm)			cUL Recognized			ROHS Compliant		
						PATENT NUMBER			10309594		
											
LED OPERATION:		CONNECT STACK COLOR WIRE TO POWER AND BROWN WIRE TO POWER.									
SOUND OPERATION:		CONNECT GRAY AND BLACK WIRES TO POWER FOR CONTINUOUS SOUND. FOR MEDIUM PULSE, CONNECT GRAY & BLACK TO POWER AND ORANGE WIRE TO GREEN/YELLOW WIRE. FOR DOUBLE PULSE, CONNECT GRAY & BLACK TO POWER AND PURPLE WIRE TO GREEN/YELLOW WIRE. FOR CONT/BEEP, CONNECT GRAY & BLACK TO POWER AND ORANGE & PURPLE TO GREEN/YELLOW WIRE.									