

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0366430003

Status:

Active

Overview:

MLX™ Power Connectors

Description:

2.13mm Diameter MLX™ Plug Housing, 3 Circuit, PA Polyamide Nylon 6/6 94V-2, Glow Wire Compatible


Documents:

3D Model

Drawing (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	Crimp Housings
Series	36643
Application	Power, Wire-to-Wire
Comments	This Molex product is manufactured from material that has the following ratings, tested by independent agencies :. a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13.. b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12.and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety; section 30 Resistance to heat and fire.<P><P>The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s).<P>If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options.
Overview	MLX™ Power Connectors
Product Name	MLX™
UPC	800756934174
Physical	
Circuits (maximum)	3
Circuits Detail	3
Color - Resin	Natural
Flammability	94V-2
Gender	Plug
Glow-Wire Compliant	Yes
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Resin	Nylon
Net Weight	2.870/g
Number of Rows	1
Packaging Type	Bag
Panel Mount	No
Pitch - Mating Interface	6.35mm
Polarized to Mating Part	Yes
Stackable	No

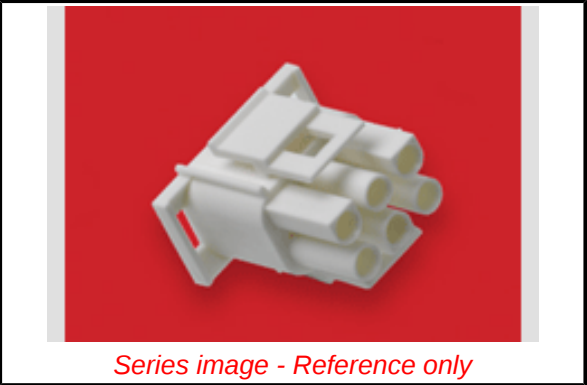

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

Need more information on product environmental compliance?

Email productcompliance@molex.com

Please visit the [Contact Us](#) section for any non-product compliance questions.

China RoHS

ELV

Not Relevant

Search Parts in this Series

36643 Series

Mates With

42022 Diameter MLX™ Pin and Socket

Receptacle

Use With

MLX™ Crimp Terminal 42023 , 42024

Temperature Range - Operating	-55°C to +105°C
Electrical	
Current - Maximum per Contact	20.0A
Material Info	
Reference - Drawing Numbers	
Sales Drawing	SD-36643-009

This document was generated on 06/24/2015

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION