

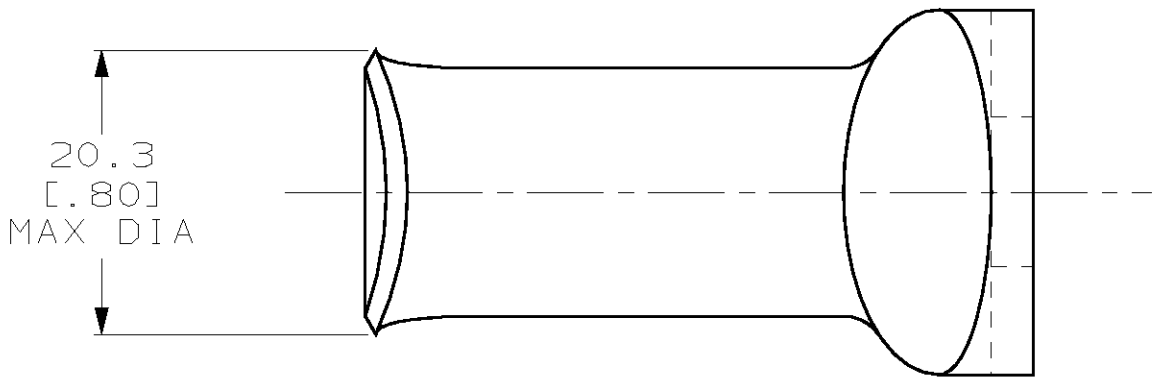


LOC	DIST	REVISIONS				
G	86	P	LTR	DESCRIPTION	DATE	APVD
		D		REV PER 063A-0561-01	070CT02	JR

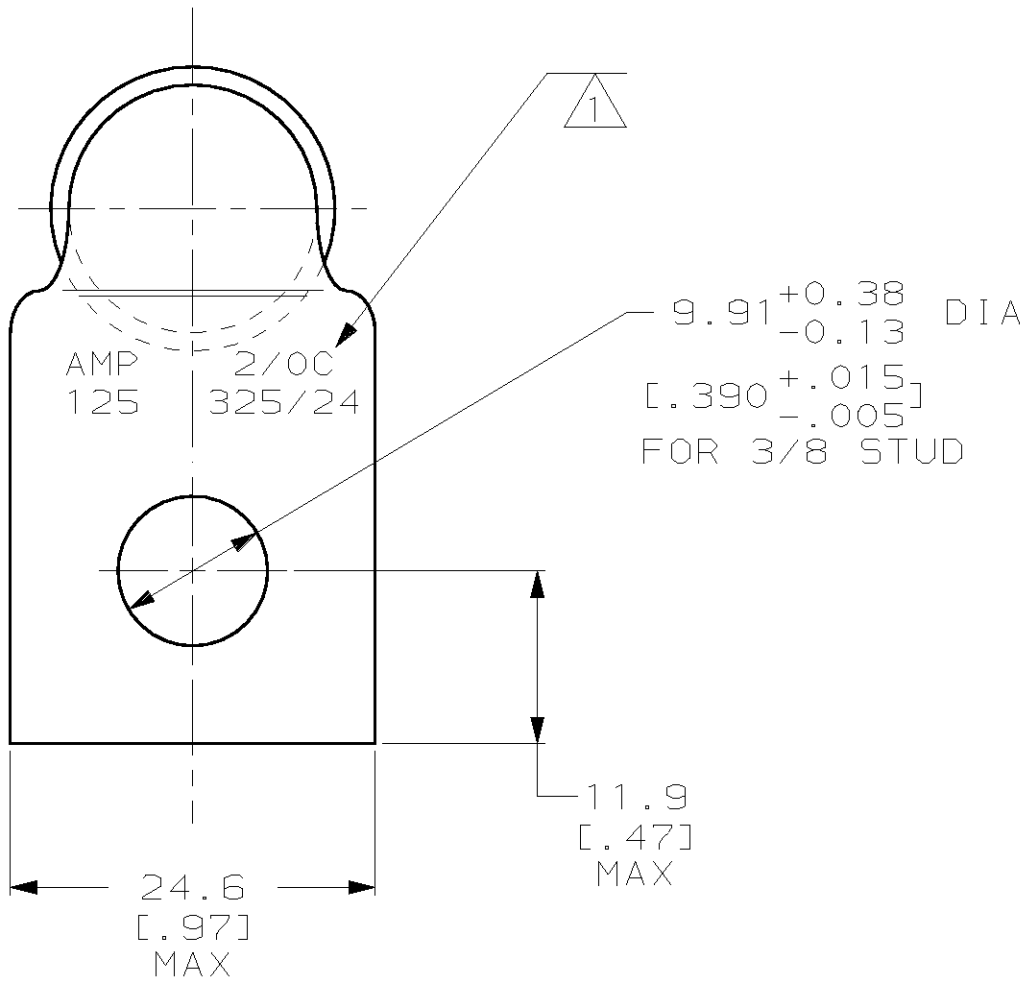

1 STAMP AMP 2/0C 125 325/24 APPROX AS SHOWN

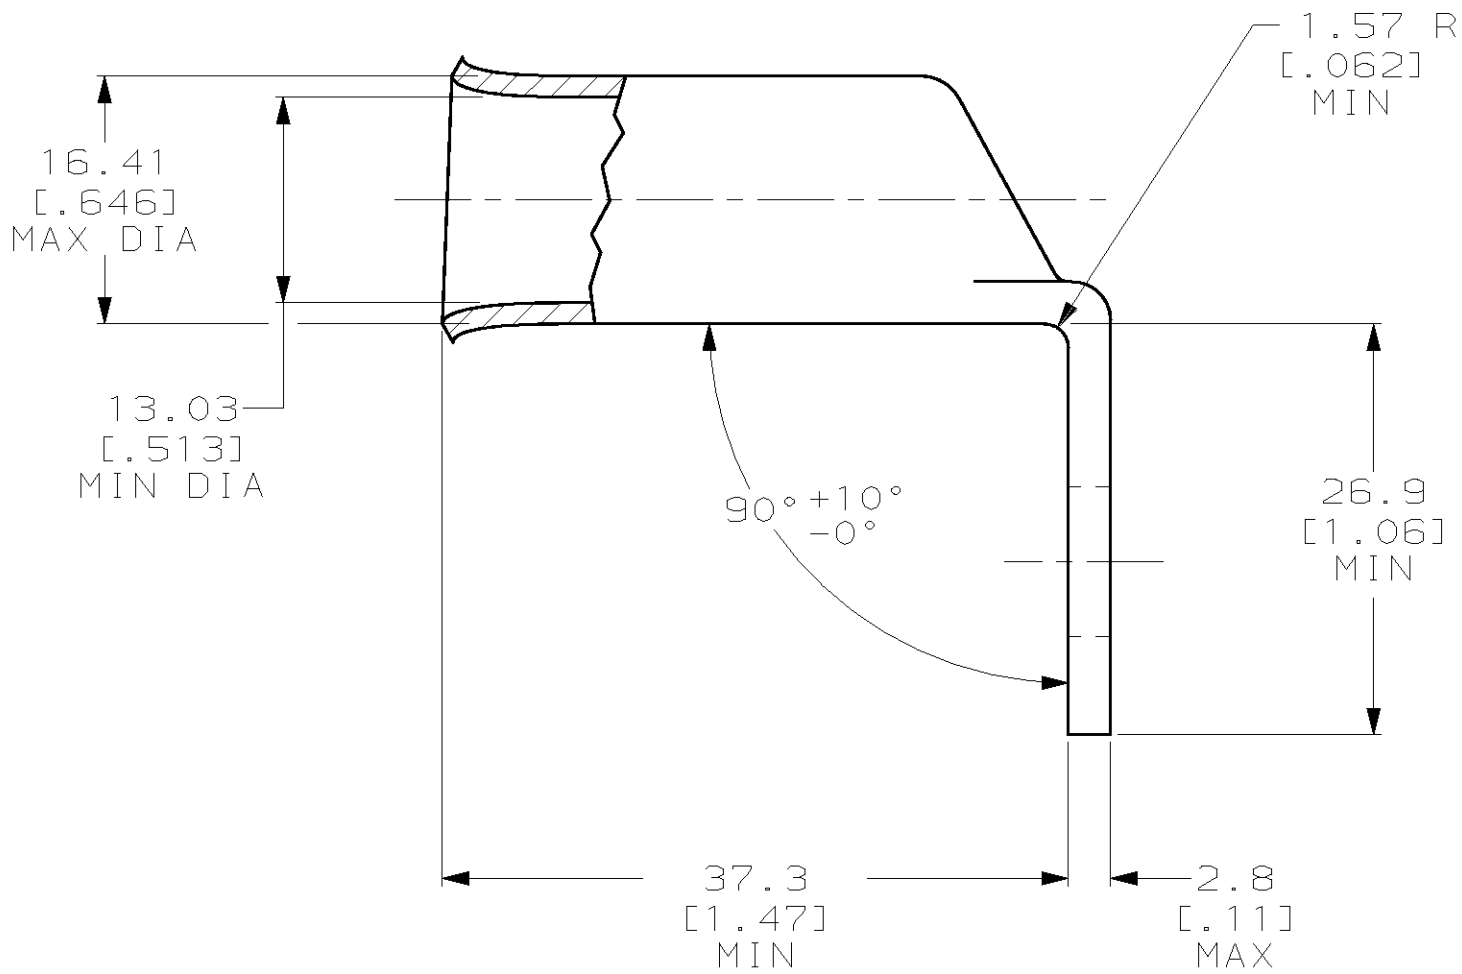

184259-1

PART
NUMBER

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS

RECOMMENDED OPERATING TEMPERATURE:
170° MAX

FOR ADDITIONAL PRODUCT
INFORMATION OR COPIES OF DRAWINGS
AND TECHNICAL DOCUMENTS

PRODUCT INFORMATION CENTER
1-800-522-6752

VOLTAGE RATING:
NOT APPLICABLE


FOR APPLICATION
TOOLING INFORMATION

TOOLING ASSISTANCE CENTER
1-800-722-1111

WIRE CROSS SECTIONAL AREA RANGE:
60.6-76.3mm² [119,500-150,500] CIR MILS
SOLID OR STRANDED

FOR ORDER ENTRY

1-800-526-5142

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN DK SCHRUM CHK WJ VOCKROTH APVD JL MECKLEY	20DEC95 02JAN96 02JAN96	AMP Incorporated Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME TERMINAL, BENT 90, AMPPOWER, WIRE SIZE: 2/0 AWG	
		0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±- FINISH		PRODUCT SPEC 108-30200 APPLICATION SPEC -	
MATERIAL COPPER PER ASTM B-75 ANNEALED		TIN PLATE 0.00381 [0.000150] MIN THK PER ASTM B545		SIZE A2	CAGE CODE 00779
CUSTOMER DRAWING		WEIGHT .072 lbs		DRAWING NO C-184259	
				SCALE 2:1	SHEET 1 OF 1
				REV D	