



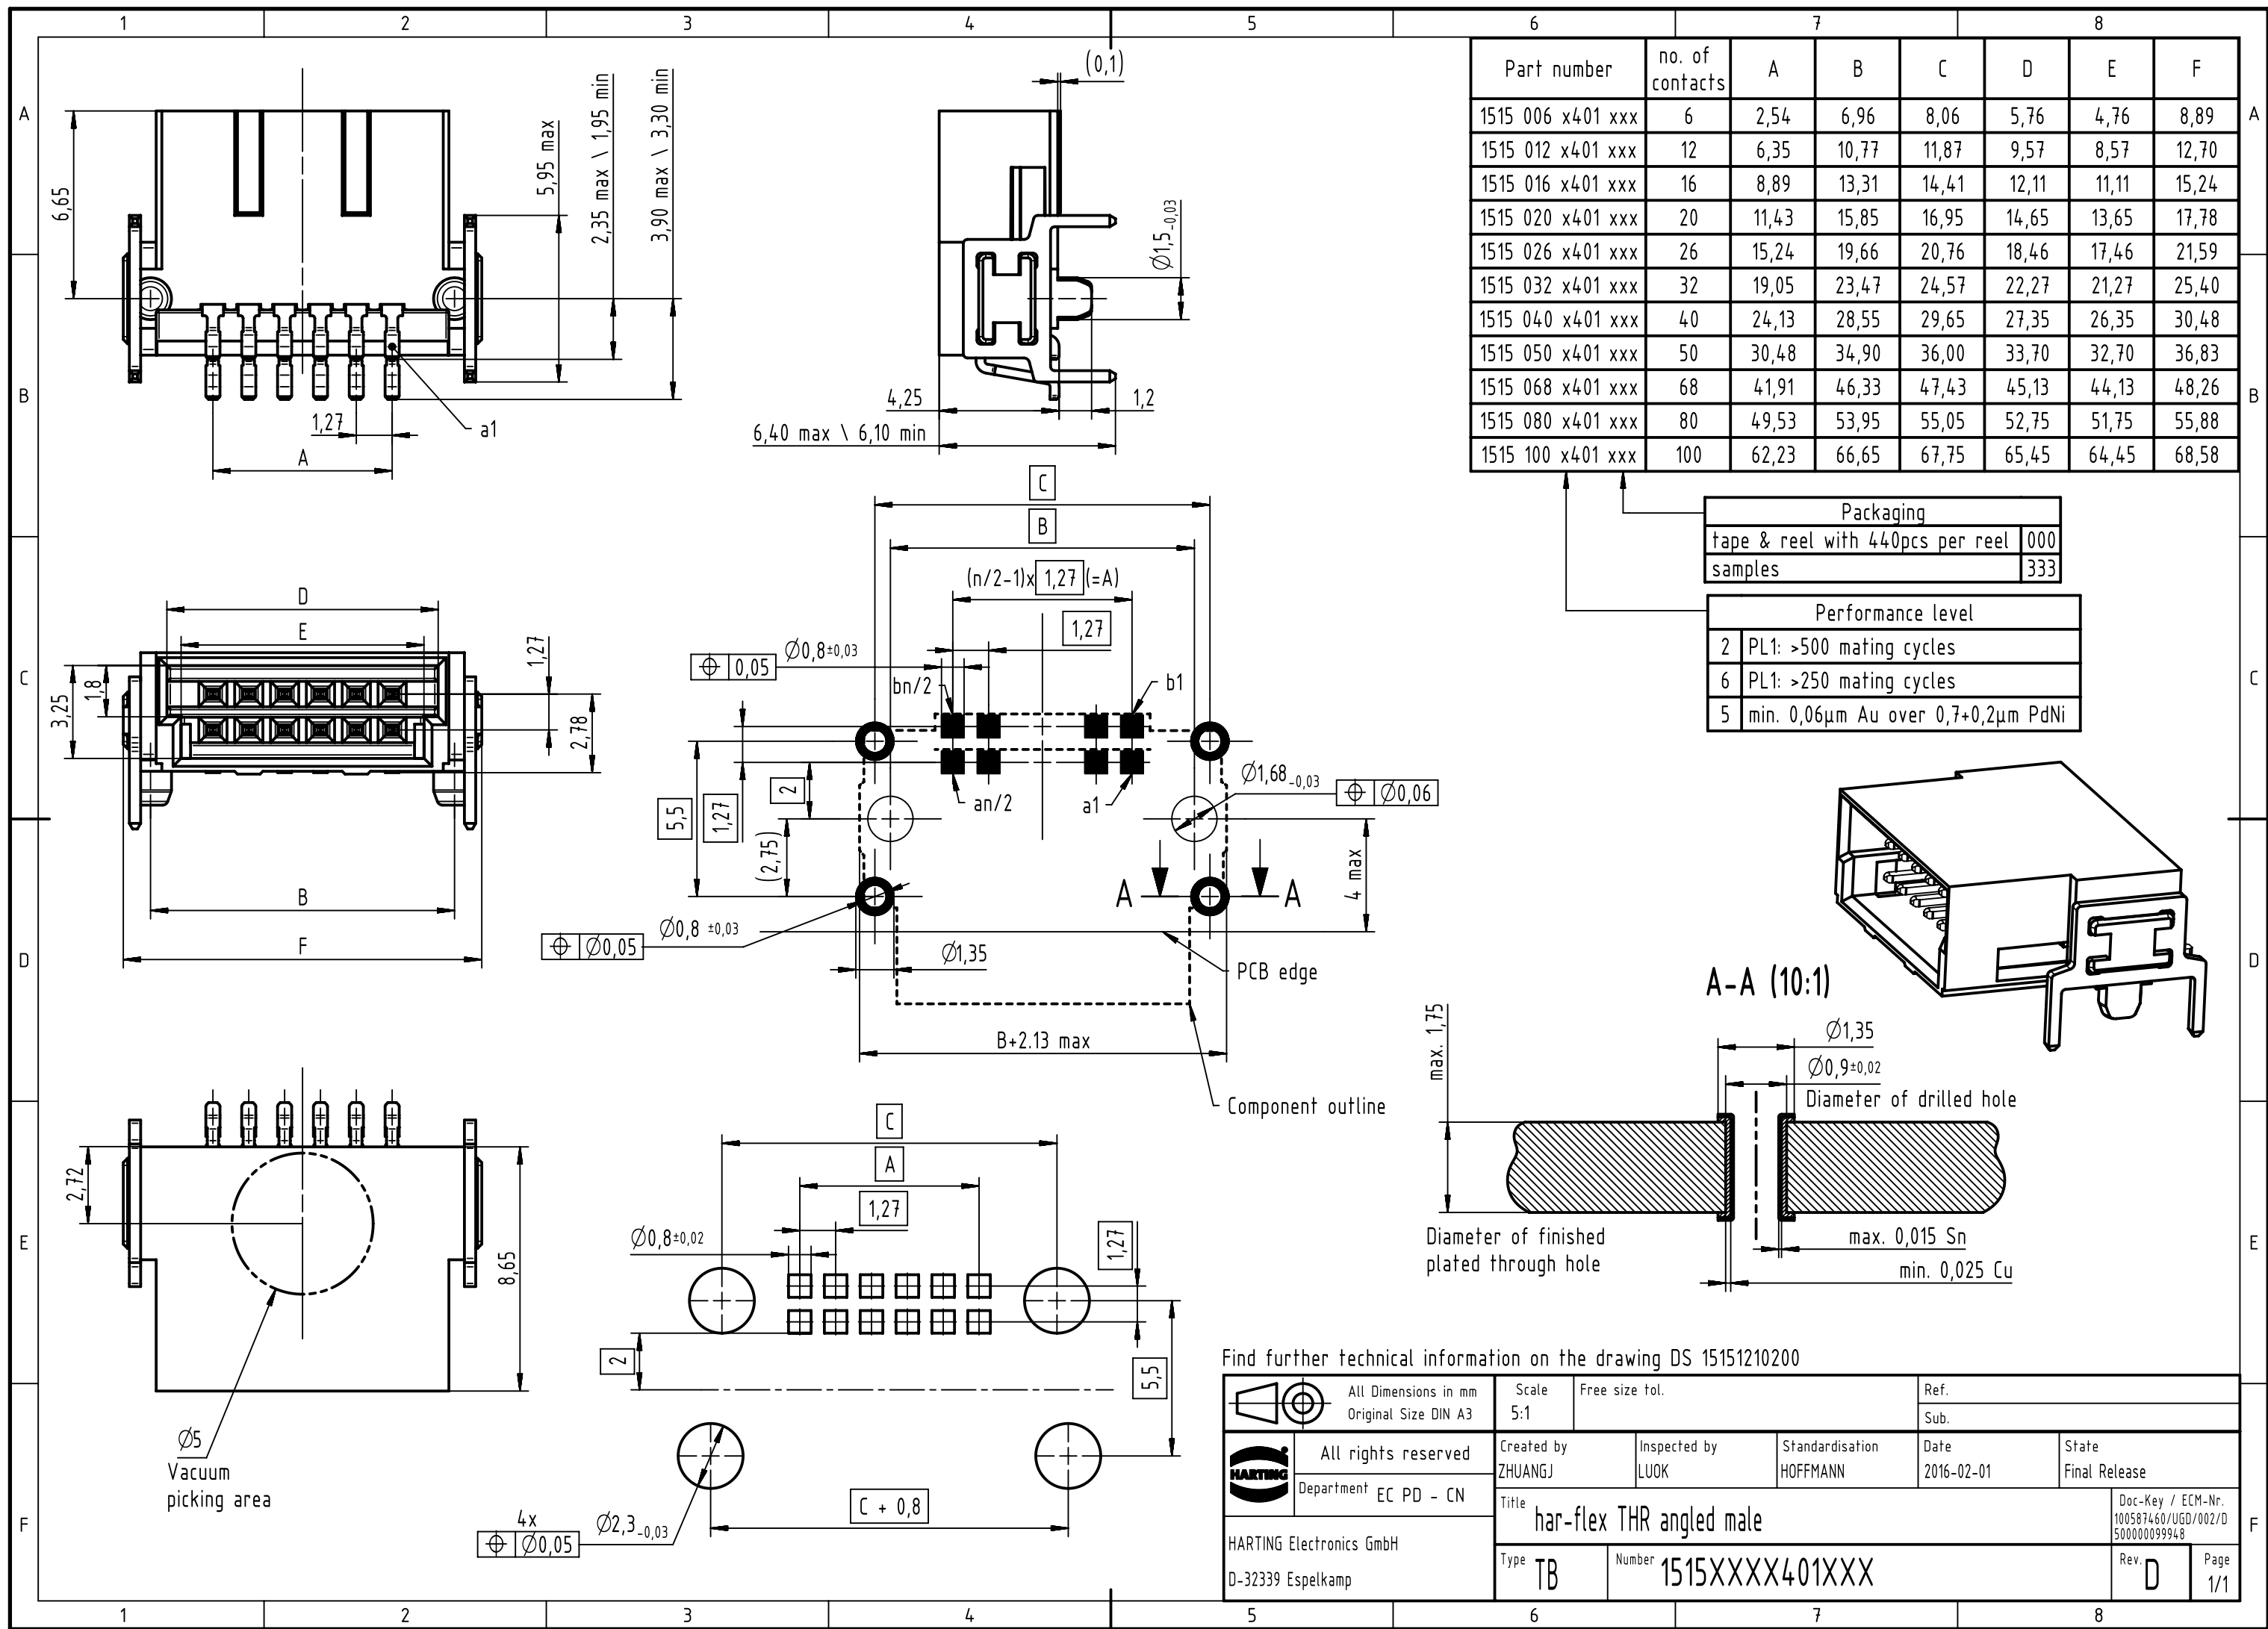


| Part number       | no. of contacts | A     | B     | C     | D     | E     | F     |
|-------------------|-----------------|-------|-------|-------|-------|-------|-------|
| 1515 006 x401 xxx | 6               | 2,54  | 6,96  | 8,06  | 5,76  | 4,76  | 8,89  |
| 1515 012 x401 xxx | 12              | 6,35  | 10,77 | 11,87 | 9,57  | 8,57  | 12,70 |
| 1515 016 x401 xxx | 16              | 8,89  | 13,31 | 14,41 | 12,11 | 11,11 | 15,24 |
| 1515 020 x401 xxx | 20              | 11,43 | 15,85 | 16,95 | 14,65 | 13,65 | 17,78 |
| 1515 026 x401 xxx | 26              | 15,24 | 19,66 | 20,76 | 18,46 | 17,46 | 21,59 |
| 1515 032 x401 xxx | 32              | 19,05 | 23,47 | 24,57 | 22,27 | 21,27 | 25,40 |
| 1515 040 x401 xxx | 40              | 24,13 | 28,55 | 29,65 | 27,35 | 26,35 | 30,48 |
| 1515 050 x401 xxx | 50              | 30,48 | 34,90 | 36,00 | 33,70 | 32,70 | 36,83 |
| 1515 068 x401 xxx | 68              | 41,91 | 46,33 | 47,43 | 45,13 | 44,13 | 48,26 |
| 1515 080 x401 xxx | 80              | 49,53 | 53,95 | 55,05 | 52,75 | 51,75 | 55,88 |
| 1515 100 x401 xxx | 100             | 62,23 | 66,65 | 67,75 | 65,45 | 64,45 | 68,58 |

| Packaging                        |     |
|----------------------------------|-----|
| tape & reel with 440pcs per reel | 000 |
| samples                          | 333 |

| Performance level |                                    |
|-------------------|------------------------------------|
| 2                 | PL1: >500 mating cycles            |
| 6                 | PL1: >250 mating cycles            |
| 5                 | min. 0,06µm Au over 0,7+0,2µm PdNi |

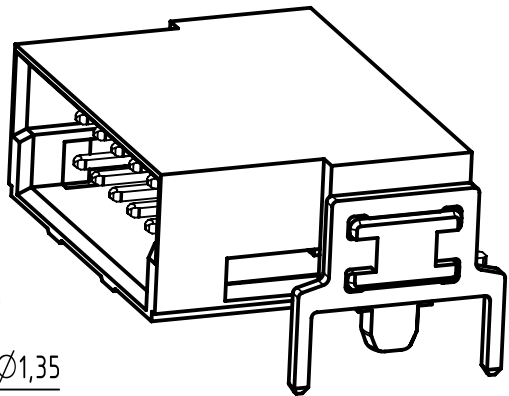

A-A (10:1)

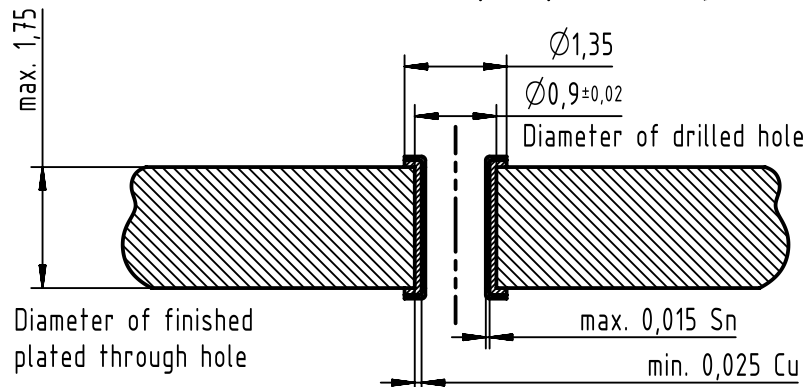

Find further technical information on the drawing DS 15151210200

|                                                                                       |                                              |                                   |                          |                             |                    |                        |                                                          |  |
|---------------------------------------------------------------------------------------|----------------------------------------------|-----------------------------------|--------------------------|-----------------------------|--------------------|------------------------|----------------------------------------------------------|--|
|  | All Dimensions in mm<br>Original Size DIN A3 | Scale<br>5:1                      |                          |                             | Free size tol.     |                        | Ref.                                                     |  |
|                                                                                       |                                              |                                   |                          |                             |                    |                        | Sub.                                                     |  |
|  | All rights reserved                          | Created by<br>ZHUANGJ             | Inspected by<br>LUOK     | Standardisation<br>HOFFMANN | Date<br>2016-02-01 | State<br>Final Release |                                                          |  |
|                                                                                       | Department EC PD - CN                        | Title<br>har-flex THR angled male |                          |                             |                    |                        | Doc-Key / ECM-Nr.<br>100587460/UGD/002/D<br>500000099948 |  |
| HARTING Electronics GmbH<br>D-32339 Espelkamp                                         |                                              | Type<br>TB                        | Number<br>1515XXXX401XXX |                             |                    | Rev.<br>D              | Page<br>1/1                                              |  |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

HARTING:

[15150802401000](#) [15150122401000](#) [15150262401000](#) [15151002401000](#)