
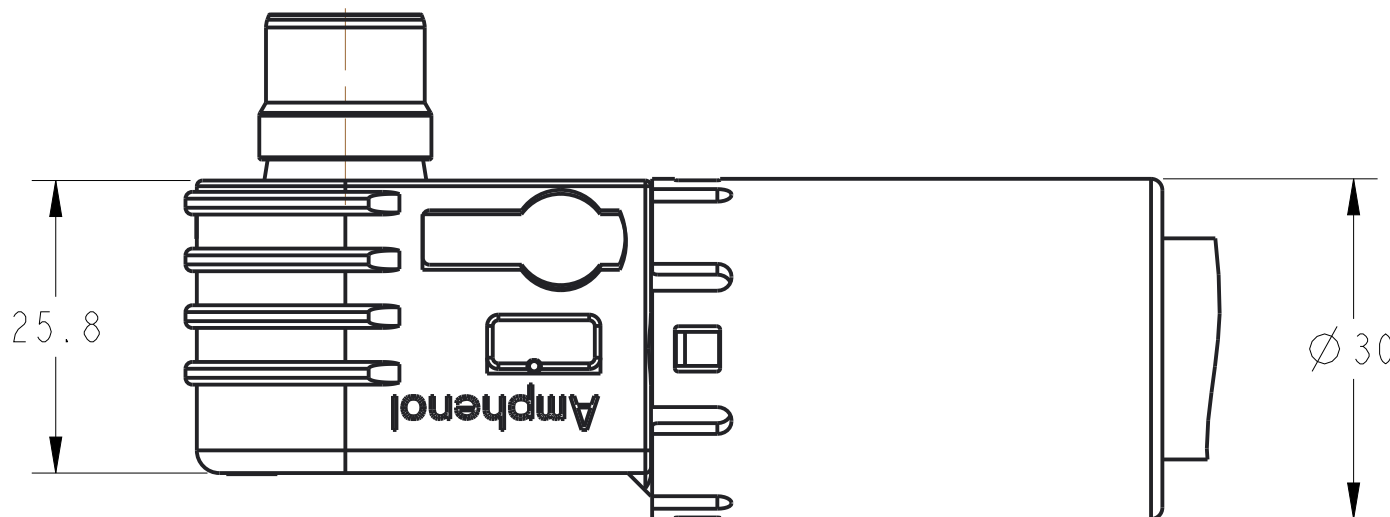
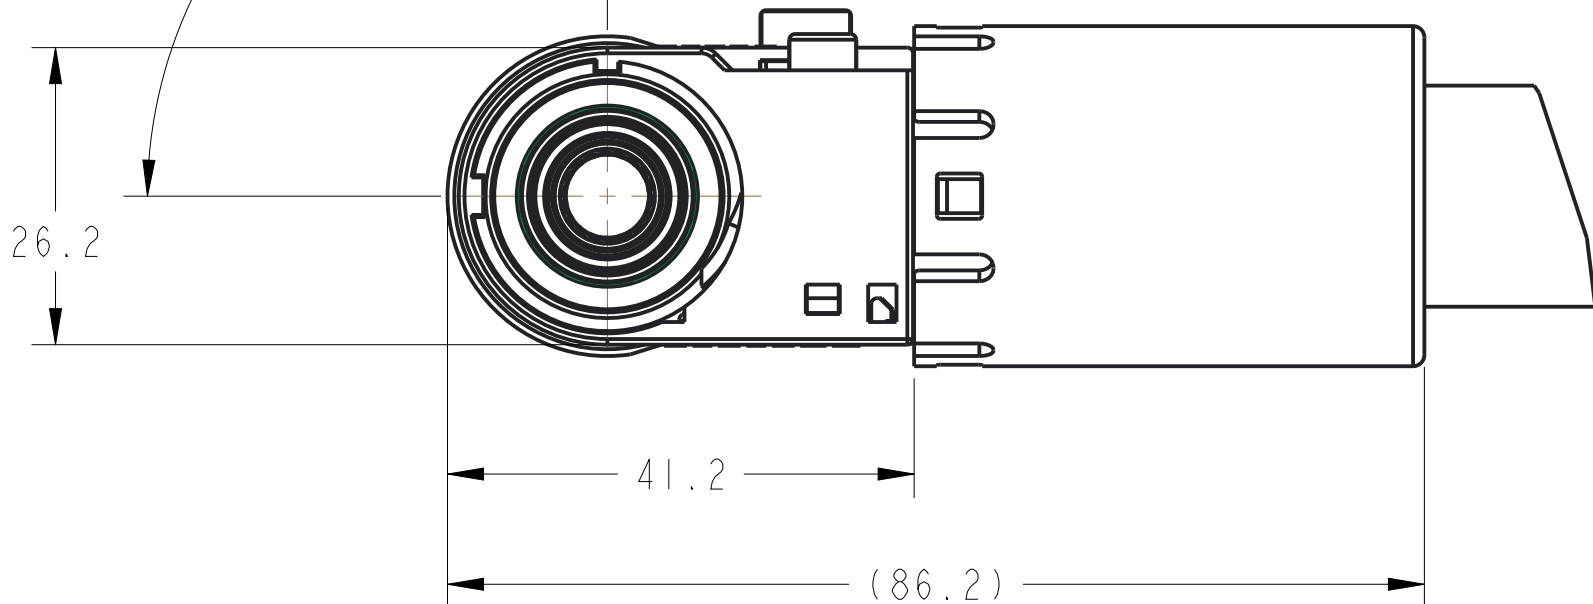


GENERAL TOLERANCE					
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400
TOLERANCE	± 0.1	± 0.1	± 0.2	± 0.3	± 0.5

CUSTOMER DRAWING

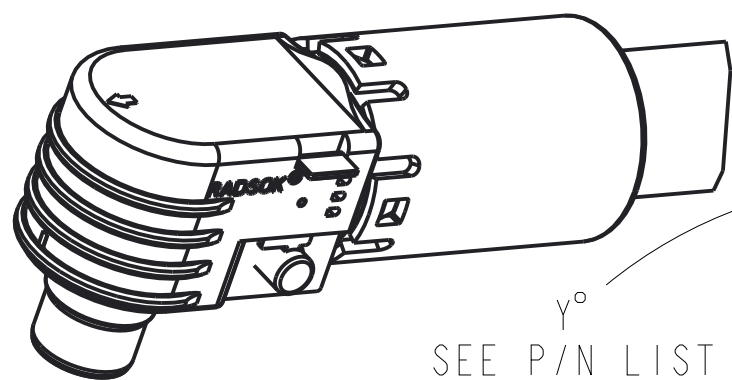

SPECIFICATIONS


SPECIFICATIONS	
CURRENT RATING	250 Amps MAX (C10-738728-X7XX) 200 Amps MAX (C10-738728-X5XX) 150 Amps MAX (C10-738728-X3XX)
OPERATING VOLTAGE	1000V DC/AC
OPERATING TEMPERATURE	-40°C - 125°C
PROTECTION CLASS	IP67 (MATED)

1. THE REFERENCED PRODUCT IS IN COMPLIANCE WITH THE MAXIMUM CONCENTRATION VALUES(MCVS) AS SET BY ROHS 2.0 DIRECTIVE 2011/65/EU AND ANNEX II AMENDMENT DIRECTIVE (EU)2015/863.

NOTES:

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM THE AMPHENOL CORP.

N/A	
NEXT ASSEMBLY	PRO/ENGINEER INFORMATION
METRIC DOCUMENT	Pro/e Model Used: C10-738728-PLUG.ASSEMB
	Drawing Name: C10-738728-ABROAD

UNLESS OTHERWISE SPECIFIED	SPECIFICATIONS	POS	QTY	PART NUMBER	DESCRIPTION	NOTE
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES= $\pm 2^{\circ}$ DEFAULT LINEAR TOLERANCES SEE TABLE ----- DIM. & TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000; OTHER AMPHENOL STANDARDS: 9-9318	MATERIAL SPEC. N/A	APPROVALS		DATE	AMPHENOL INDUSTRIAL OPERATIONS Amphenol Technology(Zhuhai)Co.,Ltd No.63, Xingnan Road, Sanzao Town, Jinwan, Zhuhai, PRC	
		PREPARED BY	GRACE YANG	JUL-06-17		
		ENGINEER IN CHARGE	EVANS JIANG			
		DESIGN MANAGER	ROB WENG			
		DESIGN ACTIVITY GROUP	C&I		8.0MM SURLOK PLUS WITH EMI, PLUG	
	PROCESS SPEC. N/A	THIRD ANGLE PROJECTION				
LEGENDS:  =FLAG NOTE CALL OUT REFERENCE ONLY					SIZE C	
					CAGE CODE 77820	DOCUMENT NO. C10-738728-()
					REF. N/A	REV. A
					SCALE: 1:1	SHEET 1 OF 1

MFG PART NUMBER: C10-738728-() () () ()

BASE NUMBER

COLOR OF BUTTON, SEE TABLE

WIRE SIZE, SEE TABLE

SEALING, SEE TABLE

KEYWAY, SEE TABLE

CODE NUMBER REFERENCE: SLPPB() B () () () E H

BASE NUMBER

WIRE SIZE, SEE TABLE

WITH BACKSHELL

SEALING, SEE TABLE

COLOR OF BUTTON, SEE TABLE

KEYWAY, SEE TABLE

EMI

HVIL

ITEM	DESCRIPTION	CODE NUMBER	MFG NUMBER
COLOR OF BUTTON	ORANGE	1	O
	BLACK	2	B
	RED	3	R
WIRE SIZE	70 MM^2	7	70
	50 MM^2	5	50
	35 MM^2	3	35
SEALING	IP 67	0	S
	NO SEALING	1	N
KEYWAY (Y°)	90°	0	0
	270°	1	1
	60°	2	2
	120°	3	3
	150°	4	4

AMPHENOL INDUSTRIAL OPERATIONS

Amphenol Technology(Zhuhai)Co.,Ltd
No.63, Xingnan Road, Sanzao Town, Jinwan, Zhuhai, PRC

8.0MM SURLOK PLUS WITH EMI,
PLUG

SIZE C	CAGE CODE 77820	DOCUMENT NO. C10-738728-()	REV. A
-----------	--------------------	--------------------------------	-----------

SCALE: 1.5	REF. N/A	SHEET 1 OF 1
------------	-------------	--------------