
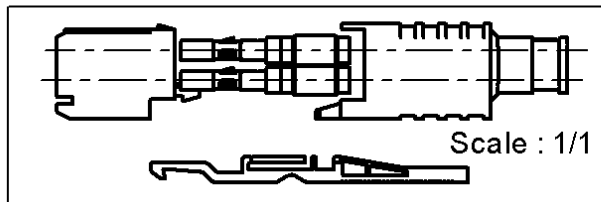
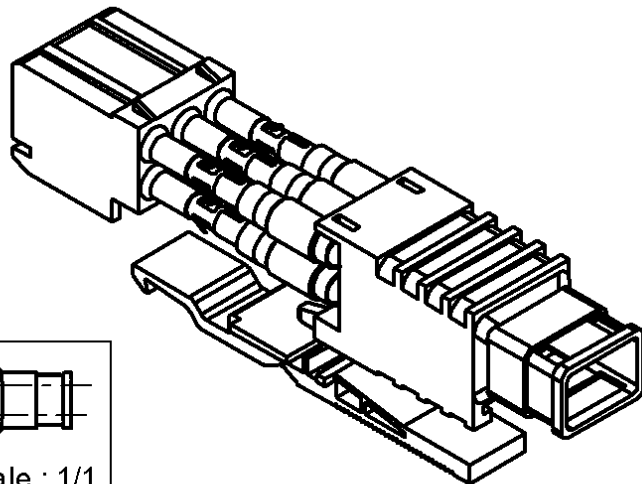


STR. FEMALE MODULE 6 CRIMP TYPE INSERTS

R694.252.557

CABLE 2.5/75 D

Series : FICH-COAX

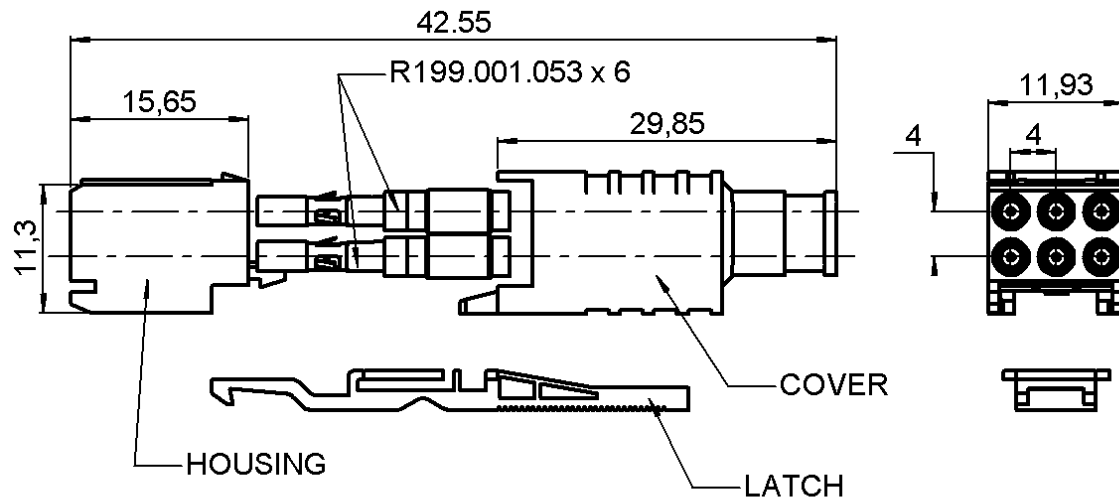

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATINGS (µm)
BODY	BRASS	GOLD 1.3 OVER NICKEL 2
CENTER CONTACT	BERYLLIUM COPPER	GOLD 1.3 OVER NICKEL 2
OUTER CONTACT		
INSULATOR	PTFE	
GASKET		
OTHERS PARTS	LIQUID CRISTAL POLYMER	NICKEL 0.6 OVER COPPER 3
.	.	.
.	.	.

Issue : 0234 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



STR. FEMALE MODULE 6 CRIMP TYPE INSERTS

R694.252.557

CABLE 2.5/75 D

Series : **FICH-COAX**

PACKAGING

SPECIFICATION

Standard	Unit	Other
30	'W' option	Contact us

ELECTRICAL CHARACTERISTICS

ENVIRONMENTAL

Impedance		75 Ω
Frequency		0-6 GHz
VSWR	NA +	0.000 x F(GHz) Maxi
Insertion loss		NA √F(GHz) dB Maxi
RF leakage	- (NA - F(GHz)) dB Maxi
Voltage rating		500 Veff Maxi
Dielectric withstanding voltage		750 Veff mini
Insulation resistance		5000 MΩ mini

Operating temperature	-25/+125 ° C
Hermetic seal	NA Atm.cm3/s
Panel leakage	NA

OTHERS CHARACTERISTICS

Assembly instruction

Others :
Housing material : UL94V-0

MECHANICAL CHARACTERISTICS

Center contact retention		
Axial force – Mating end	NA	N mini
Axial force – Opposite end	NA	N mini
Torque	NA	N.cm mini
Recommended torque		
Mating	NA	N.cm
Panel nut	NA	N.cm
Mating life	500	Cycles mini
Weight	293.200	g

Issue : 0234 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.




STR. FEMALE MODULE 6 CRIMP TYPE INSERTS

R694.252.557


CABLE 2.5/75 D

Series : FICH-COAX


1

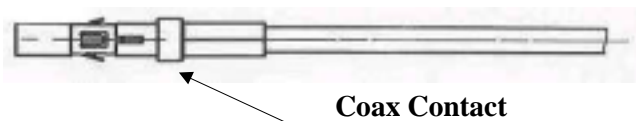


2

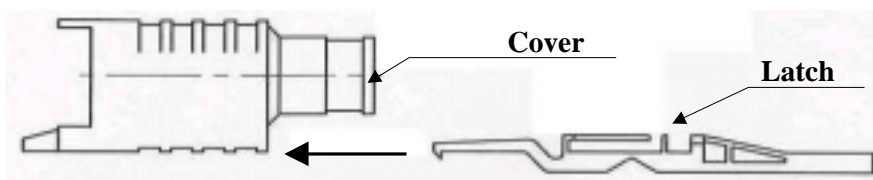


3

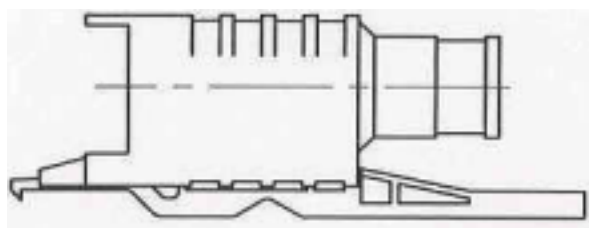


4

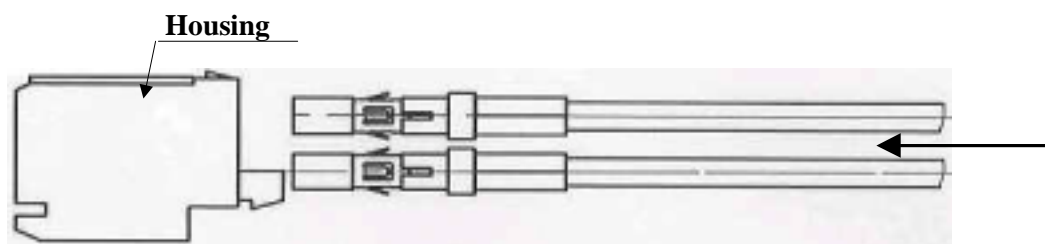


5

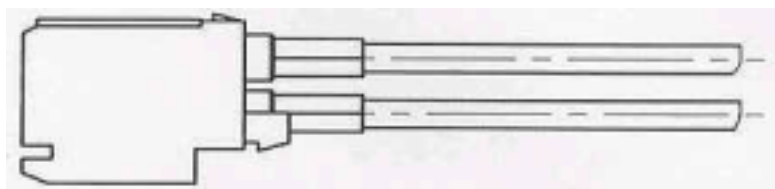

6

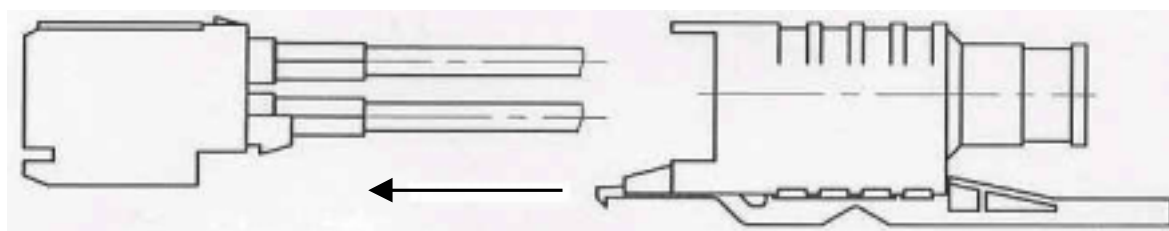

7

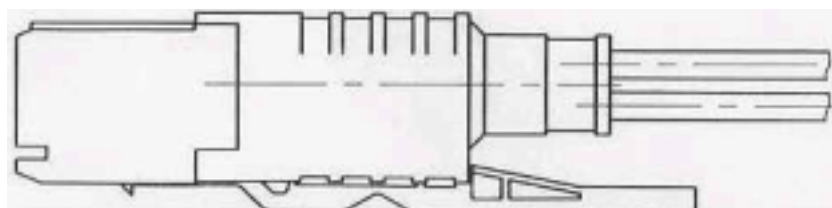

Issue : 0234 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

