



# STATSHIELD® METAL-OUT SERIES

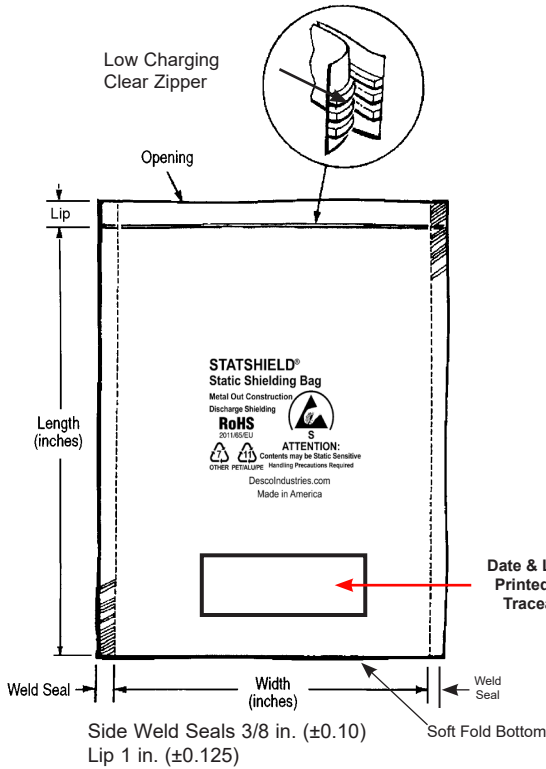

STATSHIELD®  
Static Shielding Bag  
Metal Out Construction  
Discharge Shielding  
RoHS  
2011/65/EU  
ATTENTION:  
Contents may be Static Sensitive  
OTHER MATERIALS Handling Procedures Required  
DescoIndustries.com  
Made in America

Date & Lot Code  
Printed for QC  
Traceability

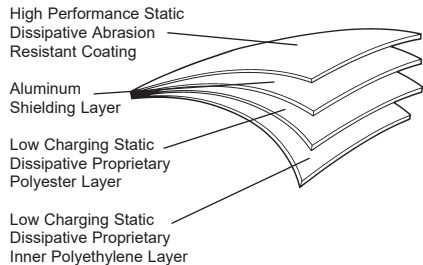

### Mixed Unsortable Plastic Scrap

Mixed unsortable plastic scrap shall contain assorted plastics of multiple grades that are co-extruded, bonded or laminated together which are unsortable into individual grades

**Desco's bags are recyclable**

Statshield® bags are packaged 100 per package in an oversized shielding bag. See Shielding Bag Storage at [TB-7057](#).

## Specifications:

### Standard Document

ANSI/ESD S541 (ANSI/ESD S20.20)  
ANSI/ESD S11.4

### Electrical Properties

Surface Resistance:  
Outer Surface  
Inner Surface  
Discharge Shielding  
Charge Generation

Capacitance Probe (to dissipate 1 KV)

### Physical Properties:

Film Thickness  
Width (Inside Dimensions)  
Length (Inside Dimensions)  
Light Transmission  
Puncture Resistance  
Heat Seal  
Non-corrosive  
Silicone  
Marking Adhesion

### Typical Values

1 x 10<sup>4</sup> to < 1 x 10<sup>8</sup> ohms  
1 x 10<sup>4</sup> to < 1 x 10<sup>11</sup> ohms  
<20 nJ  
Teflon: -0.03 nC/sq. in.  
Quartz: +0.10 nC/sq. in.  
<30 volts

Nominal 3.0 mil (0.07mm) ±10%  
Nominal -0" / + 0.250"  
Nominal ± 0.125"  
40% (Tobias)  
>10 lbs  
>10 lbs/in.  
Pass  
Not detected  
Pass

### Meets Requirements of:

ESD Protective Packaging  
Level 3 Technical Requirements

### Test Procedures/Method

ANSI/ESD STM11.11  
ANSI/ESD STM11.11  
ANSI/ESD STM11.31, EIA 541  
Modified Incline Plane  
Modified Incline Plane  
ANSI/EIA-541/Appendix E, 1 kV Discharge

MIL-STD-3010, 1003

ASTM D-1003  
MIL-STD-3010, 2065  
375°F, 1/2 sec 60 psi  
MIL-STD-3010, M3005  
FTIR  
IPC-TM-650 2.4.1

### ANSI/ESD S541 Section 6.2 Outside an EPA

"Transportation of sensitive products outside of an EPA shall require packaging that provides:

1. Low charge generation
2. Dissipative or conductive materials for intimate contact
3. A structure that provides electrostatic discharge shielding."

### RoHS, REACH and Conflict Minerals Statement

See the Desco Industries RoHS, REACH, and Conflict Minerals Statement:  
[Desco.com/pdf/REACHRoHSConflictMinerals-Desco\\_Bags.pdf](https://desco.com/pdf/REACHRoHSConflictMinerals-Desco_Bags.pdf)

See the Desco Limited Warranty:  
[Desco.DescoIndustries.com/Limited-Warranty.aspx](https://desco.com/Limited-Warranty.aspx)

Statshield® and Statfree® are Registered Trademarks of Desco Industries Inc.

For product listing, Click [HERE](#)  
See Bag Selection Chart Click [HERE](#)



Made in the  
United States of America

Specifications and procedures subject to change without notice.

## STATSHIELD® BAG, SHIELDING, METAL-OUT CONSTRUCTION, ZIPPER, 3.0 MIL (0.07mm)

DESCO WEST: 3651 WALNUT AVE., CHINO, CA 91710 WEB SITE: [Desco.com](https://desco.com)  
PHONE (909) 627-8178

DESCO EAST: ONE COLGATE WAY, CANTON, MA 02021-1407  
PHONE (781) 821-8370

DRAWING  
NUMBER  
13205

DATE:  
June  
2019

# DESCO