


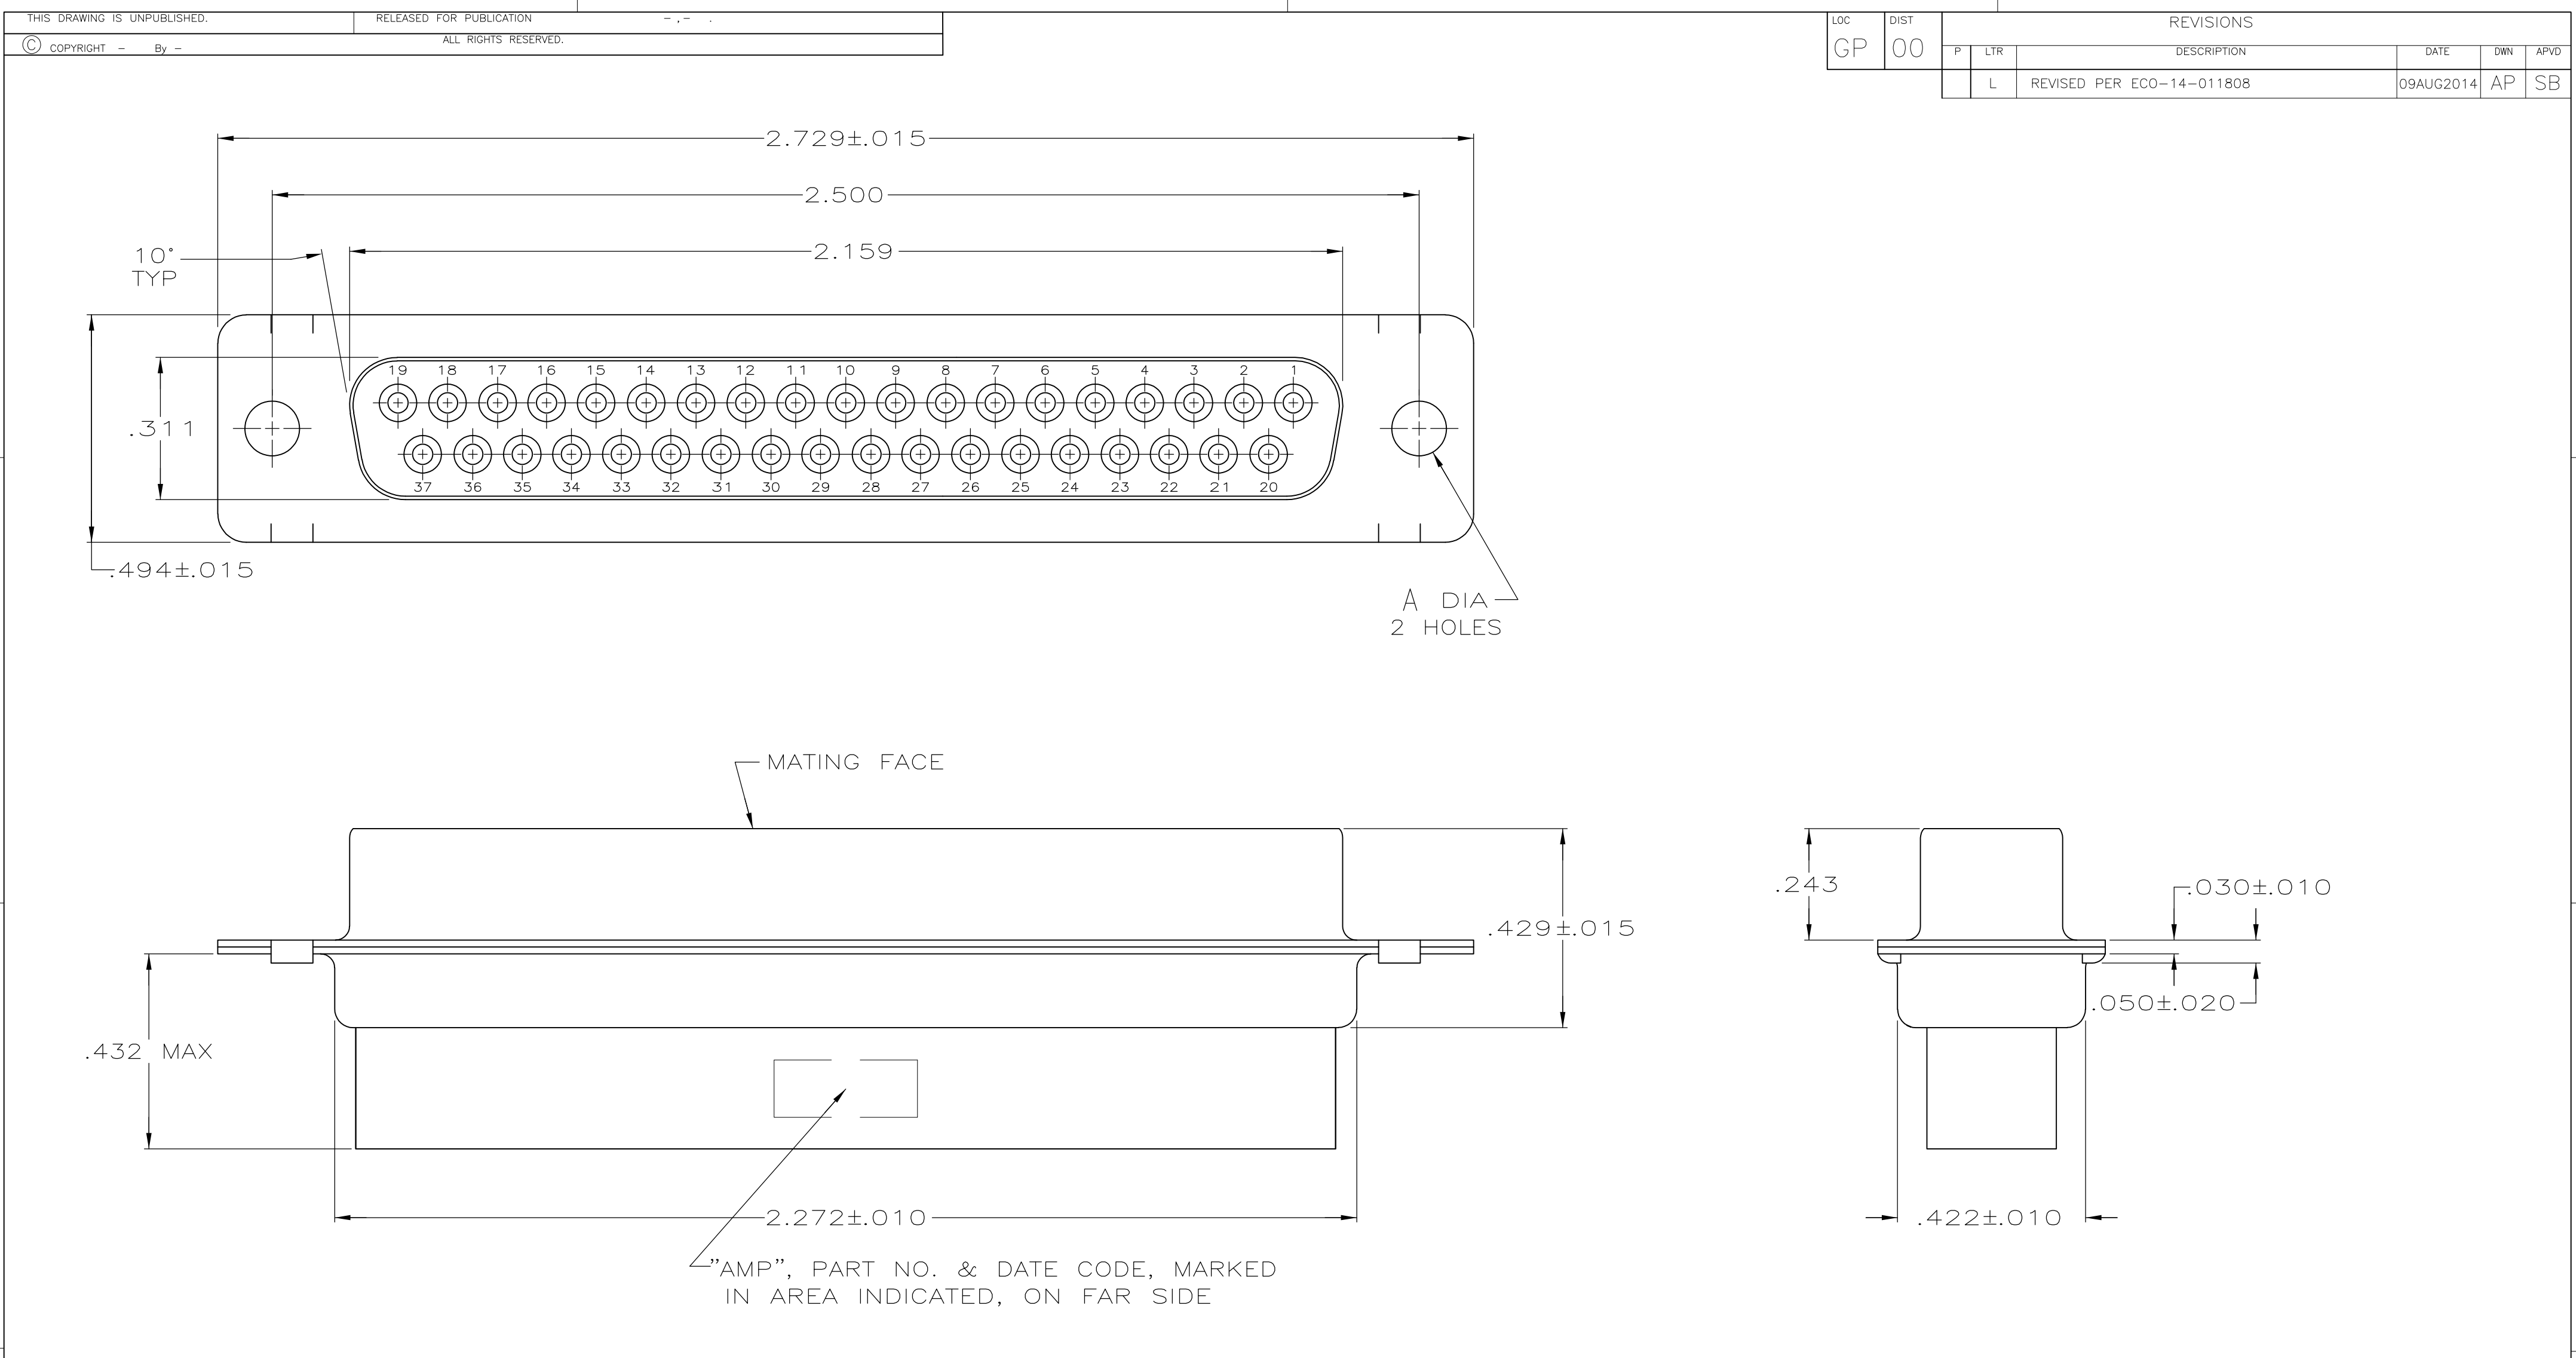

1. CONNECTOR ACCEPTS SIZE 20 DF SOCKET CONTACTS, RETENTION TINES ARE AN INTEGRAL PART OF INSERT.

2. CONNECTOR COMPLIES WITH 108-40005 WHERE APPLICABLE.

3 GLASS-FILLED PBT OR GLASS-FILLED NYLON, UL94V-0 RATED. COLOR: BLACK

4 STEEL PER ASTM A109.

5 ZINC PLATED PER ASTM B633; TYPE II; CLASS SC1; YELLOW CHROMATE.

6 TIN OR TIN-LEAD PLATED PER MIL-T-10727.

7 TIN PLATED PER MIL-T-10727 OVER COPPER PER MIL-C-14550.

8 ZINC PLATED .000200-.000400 THICK, YELLOW TRIVALENT CHROMIUM CHROMATE COATING.

SUPERSEDED BY 205209-1

OBSOLETE	STANDARD	8	.120	205209-7
	SMALL PACK	5	.120	205209-6
	STANDARD	6	.154	205209-3
	STANDARD	7	.120	205209-2
OBSOLETE	STANDARD	5	.120	205209-1
	PACKAGING TYPE	SHELL FINISH	A	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S.WELDON 7-19-85	TE Connectivity	
DIMENSIONS: INCHES		CHK J.GERACE 7-29-85		
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
	0 PLC ± -		PRODUCT SPEC	
	1 PLC ± -		APPLICATION SPEC	
	2 PLC ± -		WEIGHT	
MATERIAL SEE NOTES	FINISH		SIZE	
	SHELLS: SEE TABLE		CAGE CODE	
		DRAWING NO		RESTRICTED TO
		A2 00779 C=205209		REV
		CUSTOMER DRAWING		L