
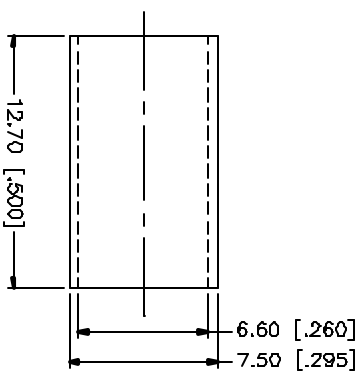


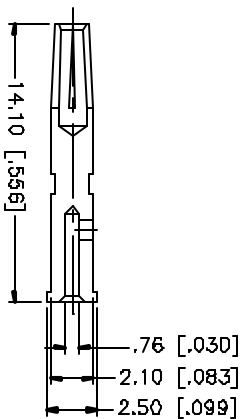

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

Amphenol Connex Part Description BNC CRIMP JACK (FOR RG-59/U CABLE) 50ohms Part No. 112146 DWG. NO. 112146.DWG REV. NC SIZE A SCALE NA										APPROVALS DATE		UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR DISTANCE BETWEEN DRILL HOLES AND FOR DISTANCE BETWEEN PINS. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE AS FOLLOWS: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED, DIMENSIONS FOR HOLE AND TAP ARE: 0.050 - .315 ± 0.007" .315 - 1.180 ± 0.015" 1.180 - 4.724 ± 0.020"					QTY	FINISH	MATERIAL	DESCRIPTION
1	NICKEL	BRASS	FERRULE	4																
1	GOLD	PHOS. BRONZE	CONTACT PIN	3																
1	NATURAL	TEFLON	INSULATOR	2																
1	NICKEL	BRASS	HOUSING/BODY	1																