

4

3

2

1


LOC E	DIST B	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			C1	Released as per ECR-08-022292	4-Sep-08	SP	JC

D



C

B

A

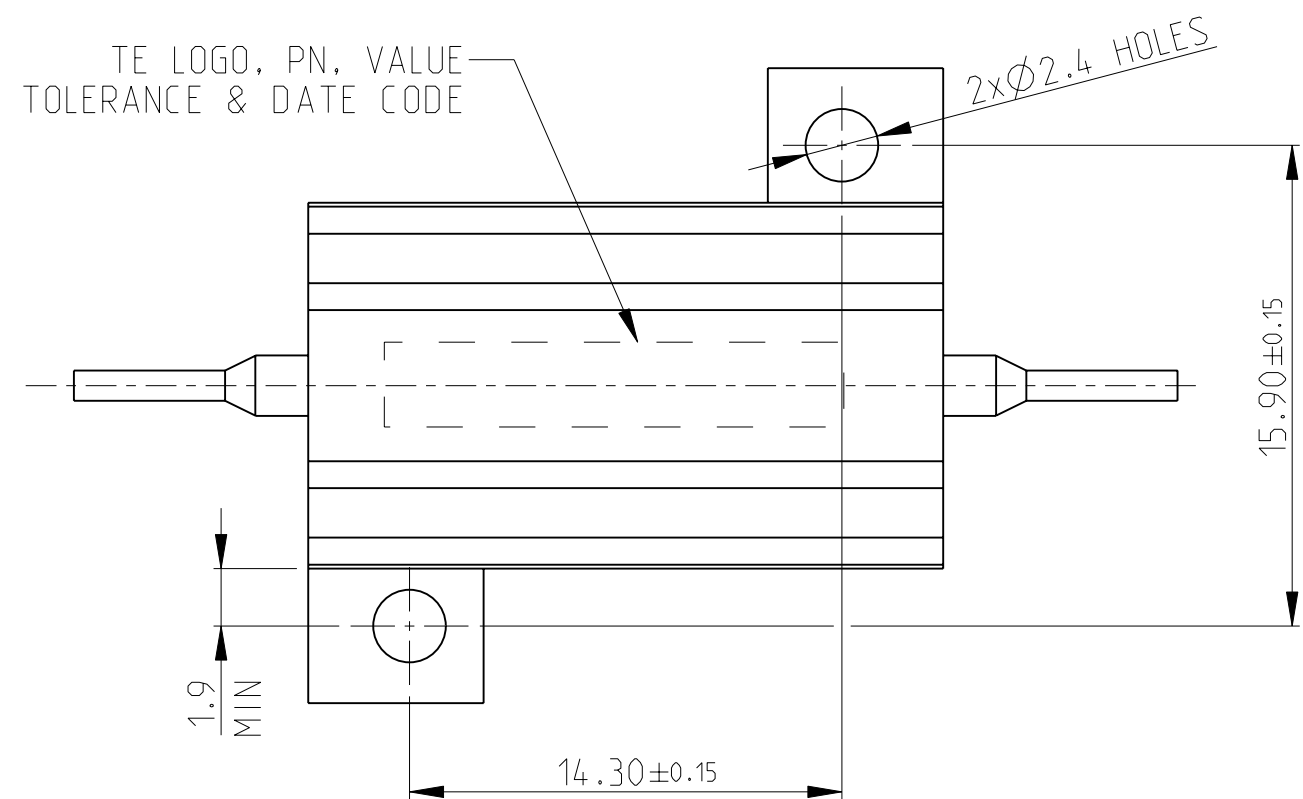

TAG HOLE ϕ 2/2.2

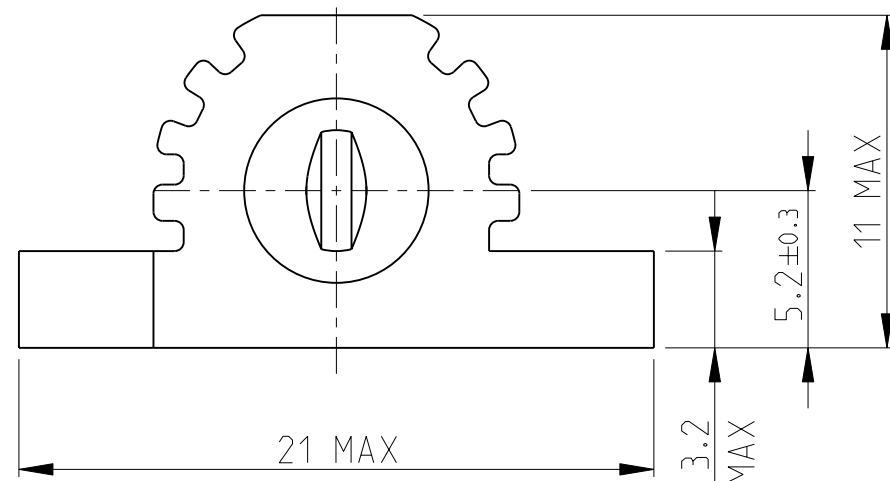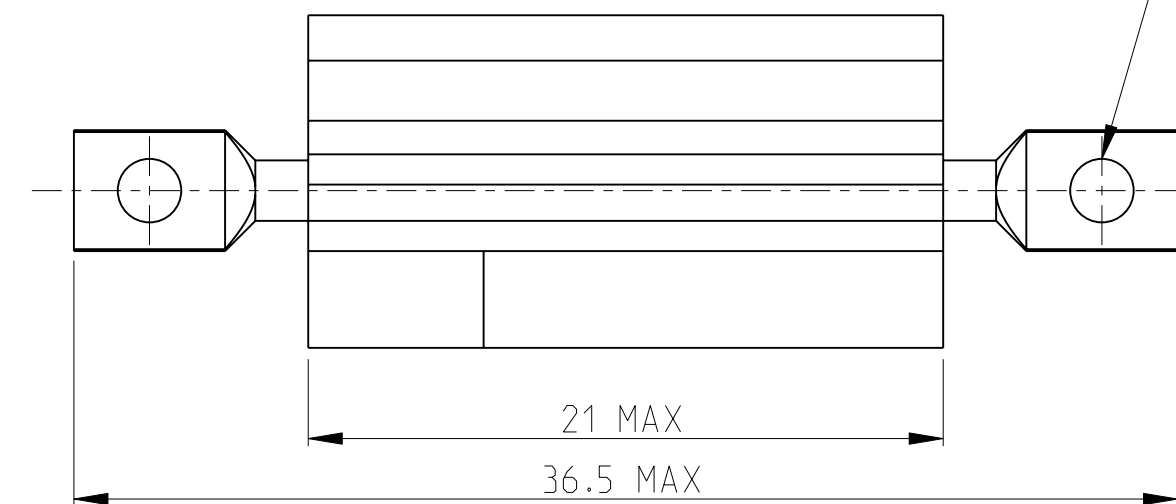

- 1 FOR FURTHER INFORMATION SEE DATA SHEET FOR HS SERIES-ALUMINIUM HOUSED RESISTORS
- 2 FOR A SPECIFIC PN FOR A RESISTANCE VALUE AND TOLERANCE, PLEASE REFER TO DMF
- 3 TECHNICAL SPECIFICATION

DISSIPATION AT 25°C : 16 WATTS MOUNTED ON STANDARD HEATSINK

BS OHMIC RANGE : R051 TO 14K

STABILITY : $\Delta R < = 1\%$ PER 1000Hrs


ISOLATION VOLTAGE : 1400V DC/AC pk

MAX WORKING VOLTAGE : 250V DC/AC rms

TEMP COEFFICIENT : $> 1R0 \quad 50ppm$
 $> 100R \quad 25ppm$

CLIMATIC CATEGORY : 55/200/56

RoHS Compliant

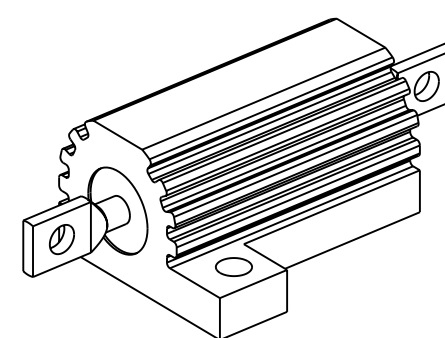

SCALE 2:1

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN	15.AUG.02	Tyco Electronics Corporation Dorcan, Swindon, SN3 5HH		
		CHK	-			
		APVD	-	NAME HSA10 METAL CLAD RESISTOR		
		PRODUCT SPEC	-			
		APPLICATION SPEC	-	SIZE A3		
		WEIGHT	-			
		CUSTOMER DRAWING	-	CAGE CODE	00779	DRAWING NO
						©1625966
				SCALE	4:1	SHEET 1 OF 1
						REV C1