
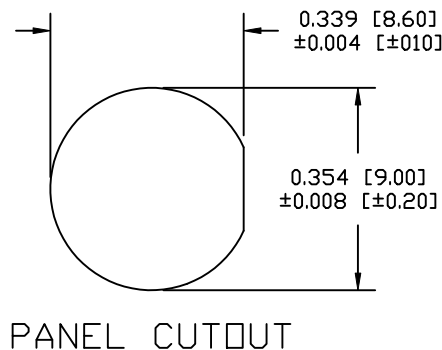


DESCRIPTION: M8 MALE - PANEL MOUNT (REAR) - SOLDER CUP - 4 POS.

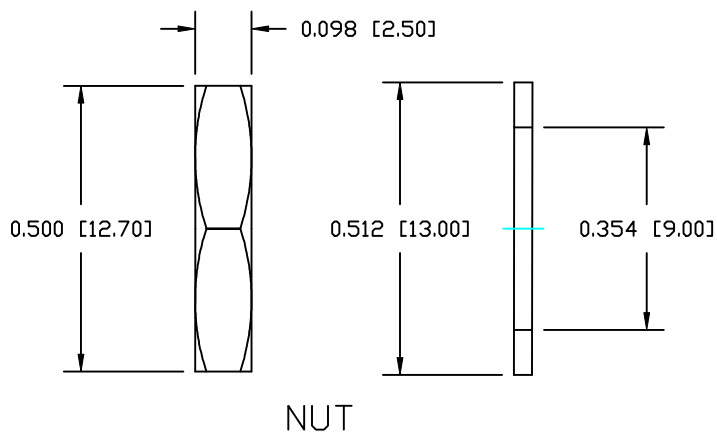

NOTE:

MATERIAL

HOUSING:
CONTACT:
NUT:
SHELL:
WASHER:
O-RING:

PBT UL94V-0, BLACK
BRASS
BRASS
BRASS
BRASS
NBR, BLACK

FINISH

CONTACT:

GOLD FLASH 10µ MIN.
OVER 50µ NICKEL
NICKEL 60µ TO 100µ
NICKEL 60µ TO 100µ
NICKEL 60µ TO 100µ

SHELL:
WASHER:
NUT:

ELECTRICAL



RATED CURRENT:
RATED VOLTAGE:
WATER PROOF:

5A
125V
IP67

ENVIRONMENT

OPERATION TEMPERATURE:
WIRE GAUGE:

-40°C TO +85°C
24-28 AWG

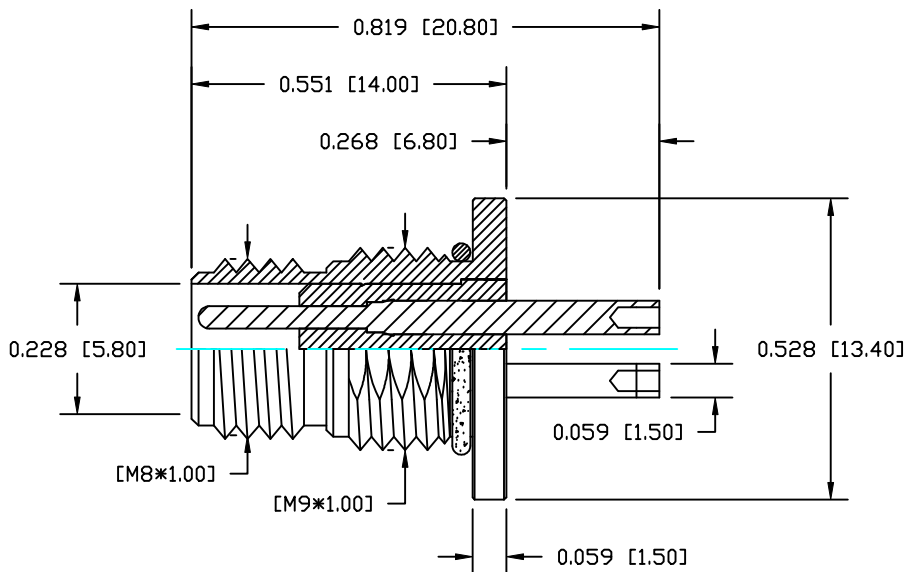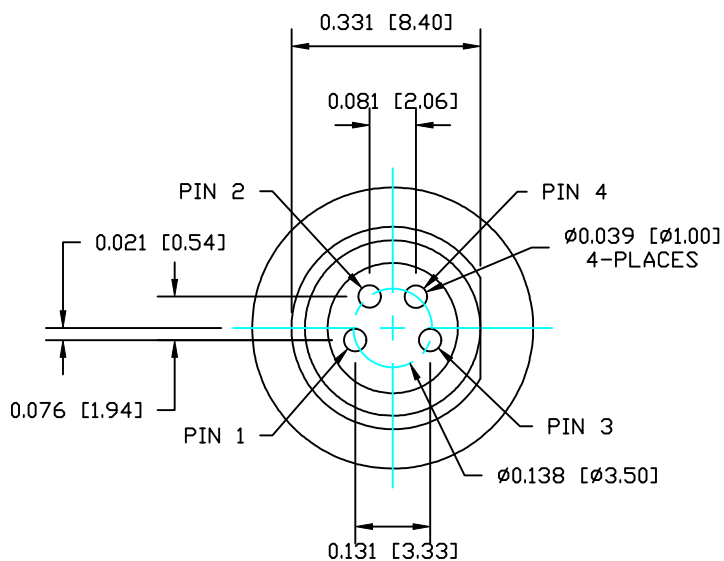

RoHS COMPLIANT

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

C. SMITH

DATE:

08-14-14

CHECKED:

DATE:

NorComp

SCALE:

N.T.S.

SHEET

OF

1 1

REV

0

DWG NO.

855-004-103R004