

6


5

4

3


2

45549




NOTES:

- HOUSING MAT'L: LCP, GLASS FILLED, UL 94V-0, BLACK
CONTACT MAT'L: NA
FINISH: NA
- PRODUCT SPECIFICATION: PS-45424-001
- PACKAGING SPECIFICATION: PK-45481-001
- THIS MODULE INTERLOCKS WITH ALL STANDARD MOLEX POWER DOCK MODULES.
- DATUM -A- IS THE CONNECTOR MOUNTING SURFACE.
- THE PRIMARY SHIPPING CARTON WILL BE LABELED
"COMPLIANT TO RoHS DIRECTIVE 2000/95/EC AND
ELV ANNEX II OF DIRECTIVE 2000/53/EC".
- THIS MODULE MAY BE USED IN A VERTICAL OR RIGHTN ANGLE POSITION

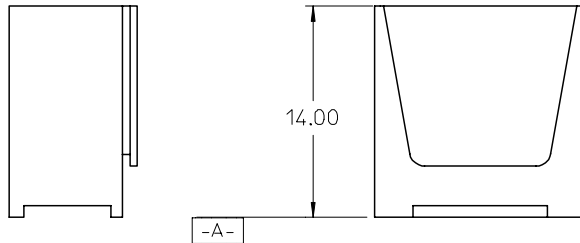

-A-

VERTICAL OR RIGHT ANGLE
PD511 OR PD512



EC NO: UCP2006-0462		DRWN:KSAMIEC 2005/09/02		CH'KD: 2005/09/02		APPR: APATEL 2005/09/12		REV		A			
DESCRIPTION		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE 2:1		DESIGN UNITS METRIC		THIRD ANGLE PROJECTION		REVISE ON CAD ONLY	
▽ - 0 ▽C - 0				mm INCH		DIMENSION STYLE MM ONLY		TITLE POWER DOCK MODULE VERT OR RTAN SPACER 250 V PD511 OR PD512					
		4 PLACES		± --- ± ---		DRAWN BY DATE							
		3 PLACES		± --- ± ---		SAMIEC 2004/03/26							
		2 PLACES		± 0.25 ± ---		CHECKED BY DATE							
		1 PLACE		± 0.50 ± ---		SAMIEC 2004/03/26							
		ANGULAR ±1/2°		APPROVED BY DATE		MATERIAL NO. DOCUMENT NO. SHEET NO.							
		DRAFT WHERE APPLICABLE		MARGULIS 2004/03/26		45549-0001 SD-45549-001 1 OF 1							
MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											