
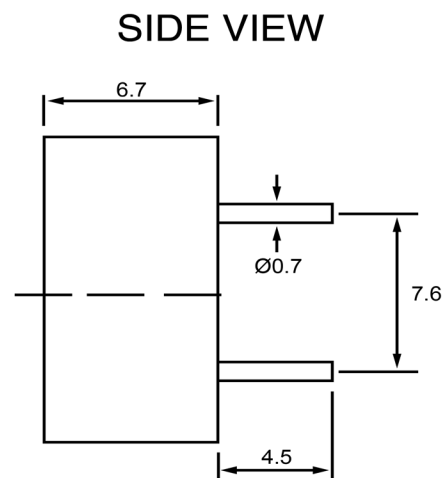


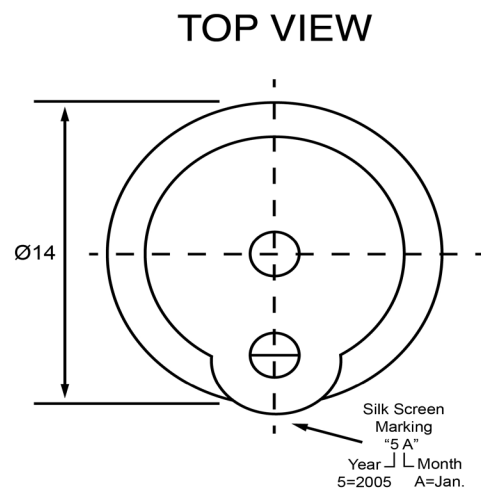

Specifications			Notes	Revision History									
Description	Value	Unit		Version	Description		Date	Approved					
Technology	Piezo		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering		10/21/2013	J.S					
Resonant Frequency	4,000	(Hz)											
Rated Voltage	9	(V)											
SPL @ 10cm	80	(dBA)											
Capacitance	13,000	(pF)											
Mount Type	Thru Hole												
Voltage Range	1 ~ 20	(V)											
Max Rated Current	7	(mA)											
Housing Material	NORYL												
Operating Temperature	-20 ~ +70	°C											
Storage Temperature	-20 ~ +70	°C											
Weight	1	(g)											
 DB UNLIMITED			Piezo Transducer		Drawn by				Date	Checked by	Date	Approved by	Date
					A.B.				10/21/2013	C.E.	10/21/2013	J.S	10/21/2013
					TP144009-1								