




LOC	DIST	REVISIONS					
CM	53	P	LTR	DESCRIPTION	DATE	DWN	APVO
			R1	REVISED PER ECO-11-004917	11MAR11	RK	HMR

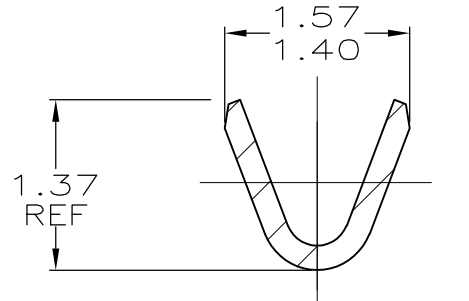


SECTION B-B
SCALE 20:1

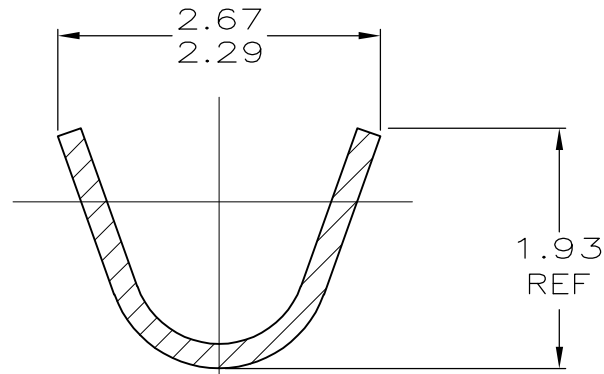


SECTION C-C
SCALE 20:1

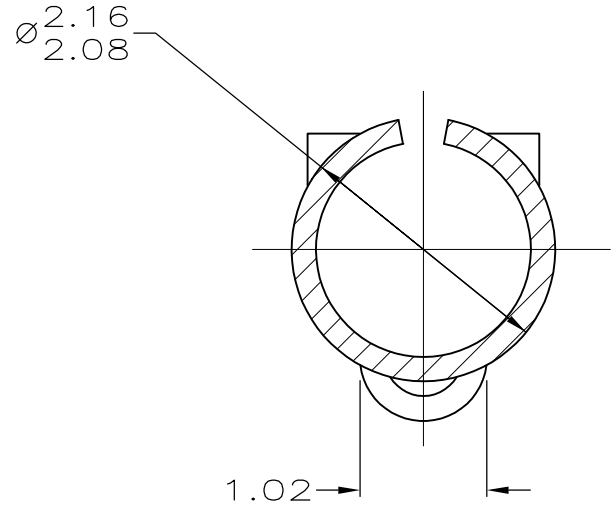



SECTION A-A
SCALE 20:1

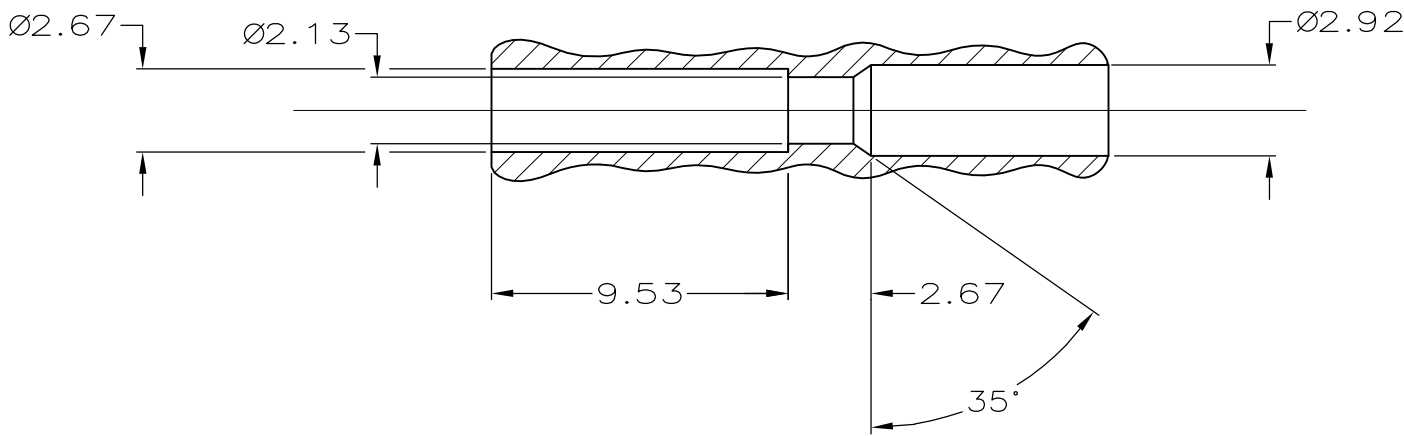

TYPICAL RECEPTACLE CAVITY SECTION
REFERENCE

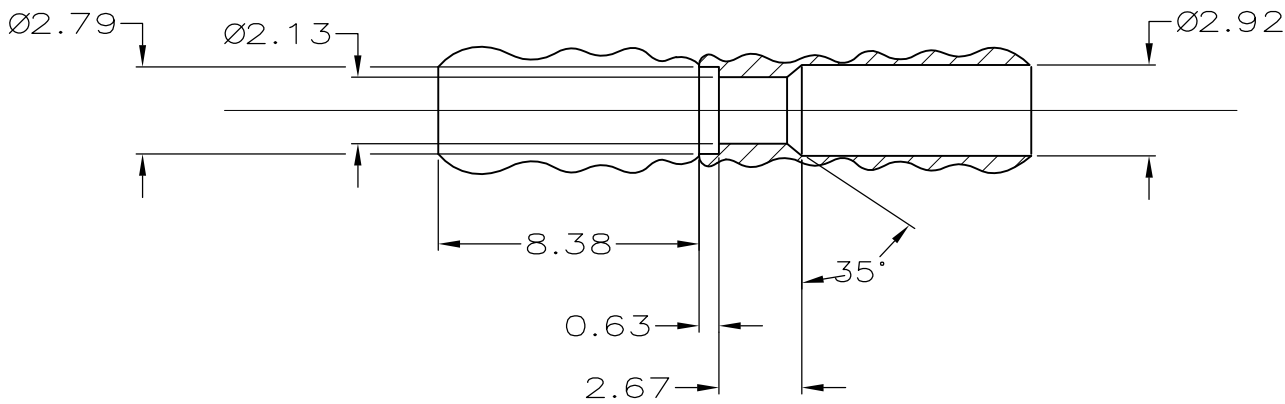

TYPICAL PLUG CAVITY SECTION
REFERENCE

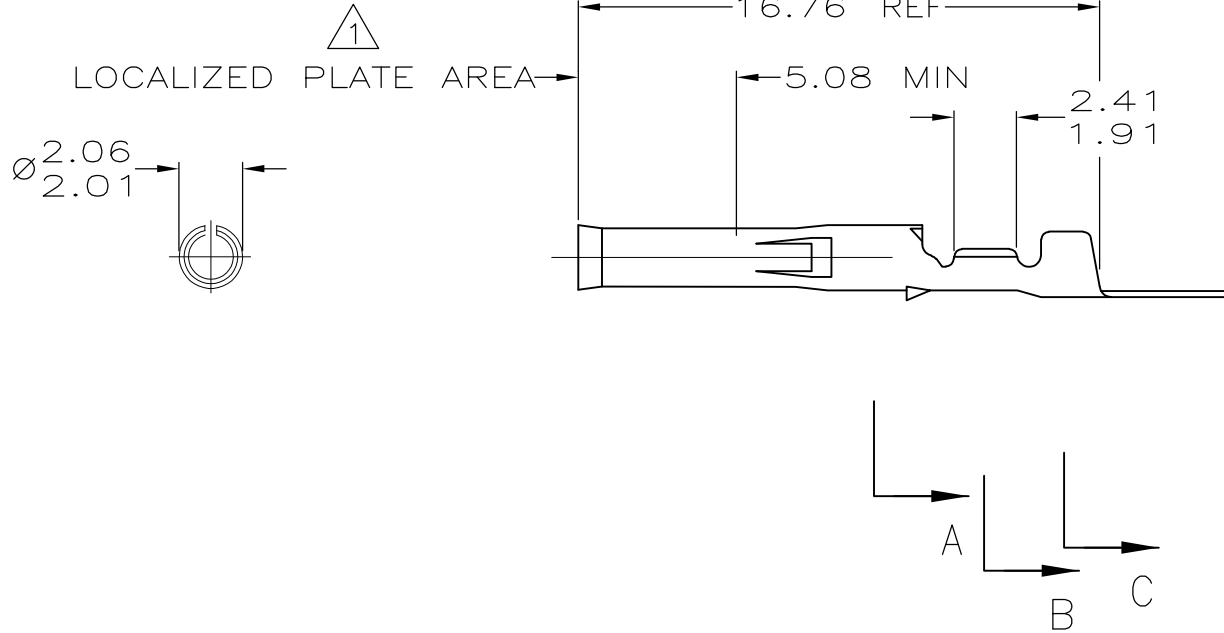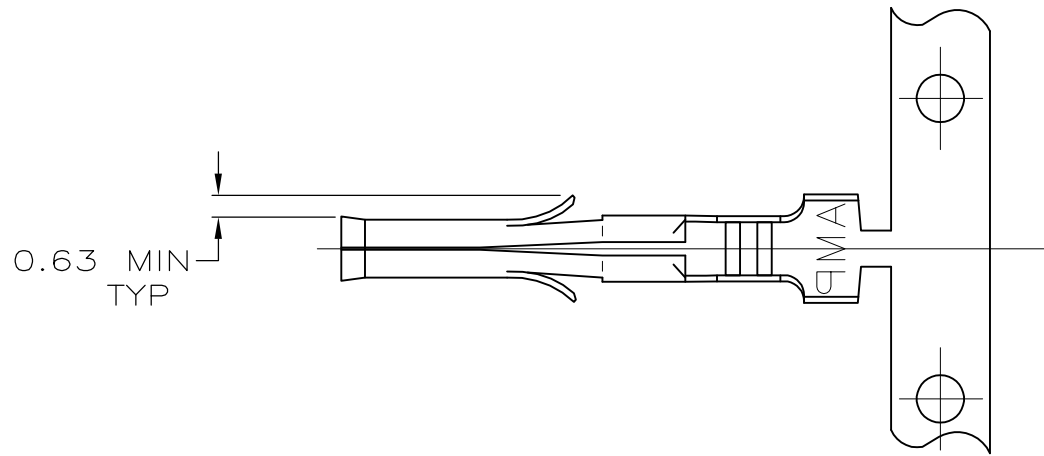

1. 0.0013 MIN NICKEL OVER ENTIRE RECEPTACLE WITH 0.0008 MIN GOLD INSIDE RECEPTACLE IN LOCALIZED PLATE AREA.

2. EITHER CAVITY WILL ACCEPT RECEPTACLE 350628,640392 OR PIN 350629,640391.

.660	16.76
.375	9.53
.330	8.38
.200	5.08
.115	2.92
.110	2.79
.105	2.67
.095	2.41
.090	2.29
.085	2.16
.084	2.13
.082	2.08
.081	2.06
.079	2.01
.076	1.93
.075	1.91
.062	1.57
.060	1.52
.055	1.40
.054	1.37
.040	1.02
.025	0.63
.008	0.20
.005	0.13
.000050	0.0013
.000030	0.0008
IN	MM
CONVERSION TABLE	

	0.20 BRASS	1.52 MAX	30-24	640392-5
PRE-TIN	0.20 PH.BRZ.	1.52 MAX	30-24	640392-2
PRE-TIN	0.20 BRASS	1.52 MAX	30-24	640392-1
FINISH	MATERIAL	INSULATION DIAMETER	WIRE RANGE	PART NO
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. SALMON 9-30-91	TE Connectivity	
		CHK R. SWING 9-30-91		
DIMENSIONS: mm(INCHES)		APVD C. CASH 10-1-91	NAME	
		PRODUCT SPEC	.062 SOCKET COMMERCIAL PIN & SOCKET	
		APPLICATION SPEC		
		WEIGHT		
		FINISH		
MATERIAL	SEE TABLE	WEIGHT	—	RESTRICTED TO
CUSTOMER DRAWING		SCALE 5:1	SHEET 1 OF 1	REV R1

METRIC