

			<u> </u>		
	Part Number:		DRAWN	10/1/2017	
	TEOAAO	1002 1	CJ	12/1/2017	
	IEU42	l003-1	CHECKED	12/5/2017	
			P.D.		
	Description:		APPROVED	12/5/2017	
Electro-Mechan	nicai i ransducer	C.E.	12/5/2017		

This document contains data proprietary to DB Unlimited. Any use or reproduction, in any form, without prior written permission of DB Unlimited is prohibited. All terms and conditions can be found at www.dbunlimitedco.com

Side View (1)


**Housing Material** 


Weight


Top View

Side View (2)


**Bottom View** 

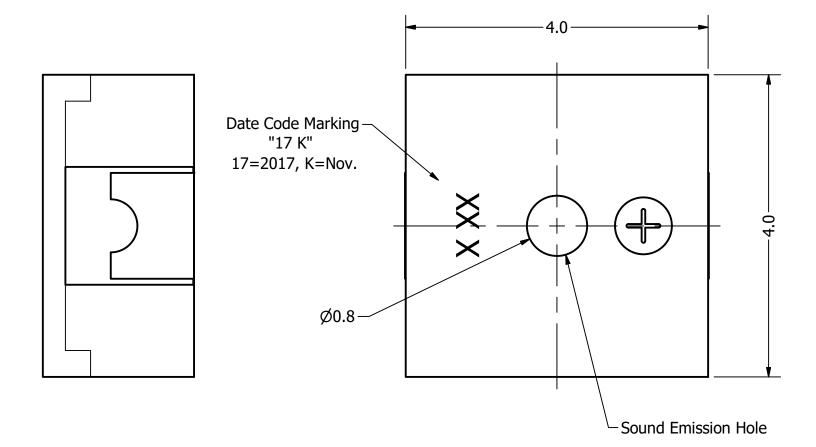

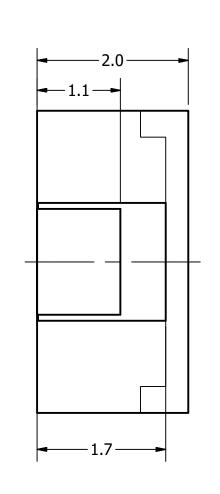

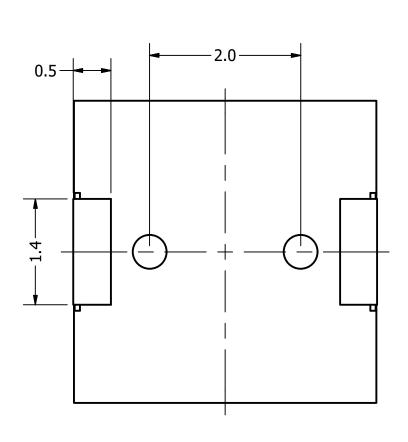

## Recommend PCB Layout

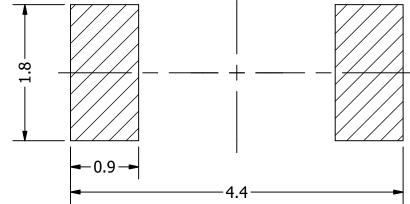

4) Subject to change or redrawn without notice

Items	Specifications	Conditions		<b></b> -0.9 →				
Min. Sound Pressure Level	70	dB (@ 10cm)	4.4					
Resonant Frequency	4,000	Hz						
Rated Voltage	3	V		REVISION HISTORY				
Voltage Range	2 ~ 4	V	REV	DESCRIPTION	DATE	APPROVED		
Coil Resistance	17 ± 3	Ω		Released from Engineering	11/23/2015	J.S.		
Max. Rated Current	90	mA	1	Add PCB Layout	12/5/2017	C.E.		
Storage Temperature	-30 ~ +80	°C		NOTES				
Operating Temperature	-20 ~ +70	°C		1) All dimensions are in mm unless otherwise noted				
Connection Method	Surface Mount Pads			2) All tolerances are $\pm$ 0.3 mm unless otherwise noted				
Mount Type	Surface Mount			3) All parts meet RoHS				

0.1