



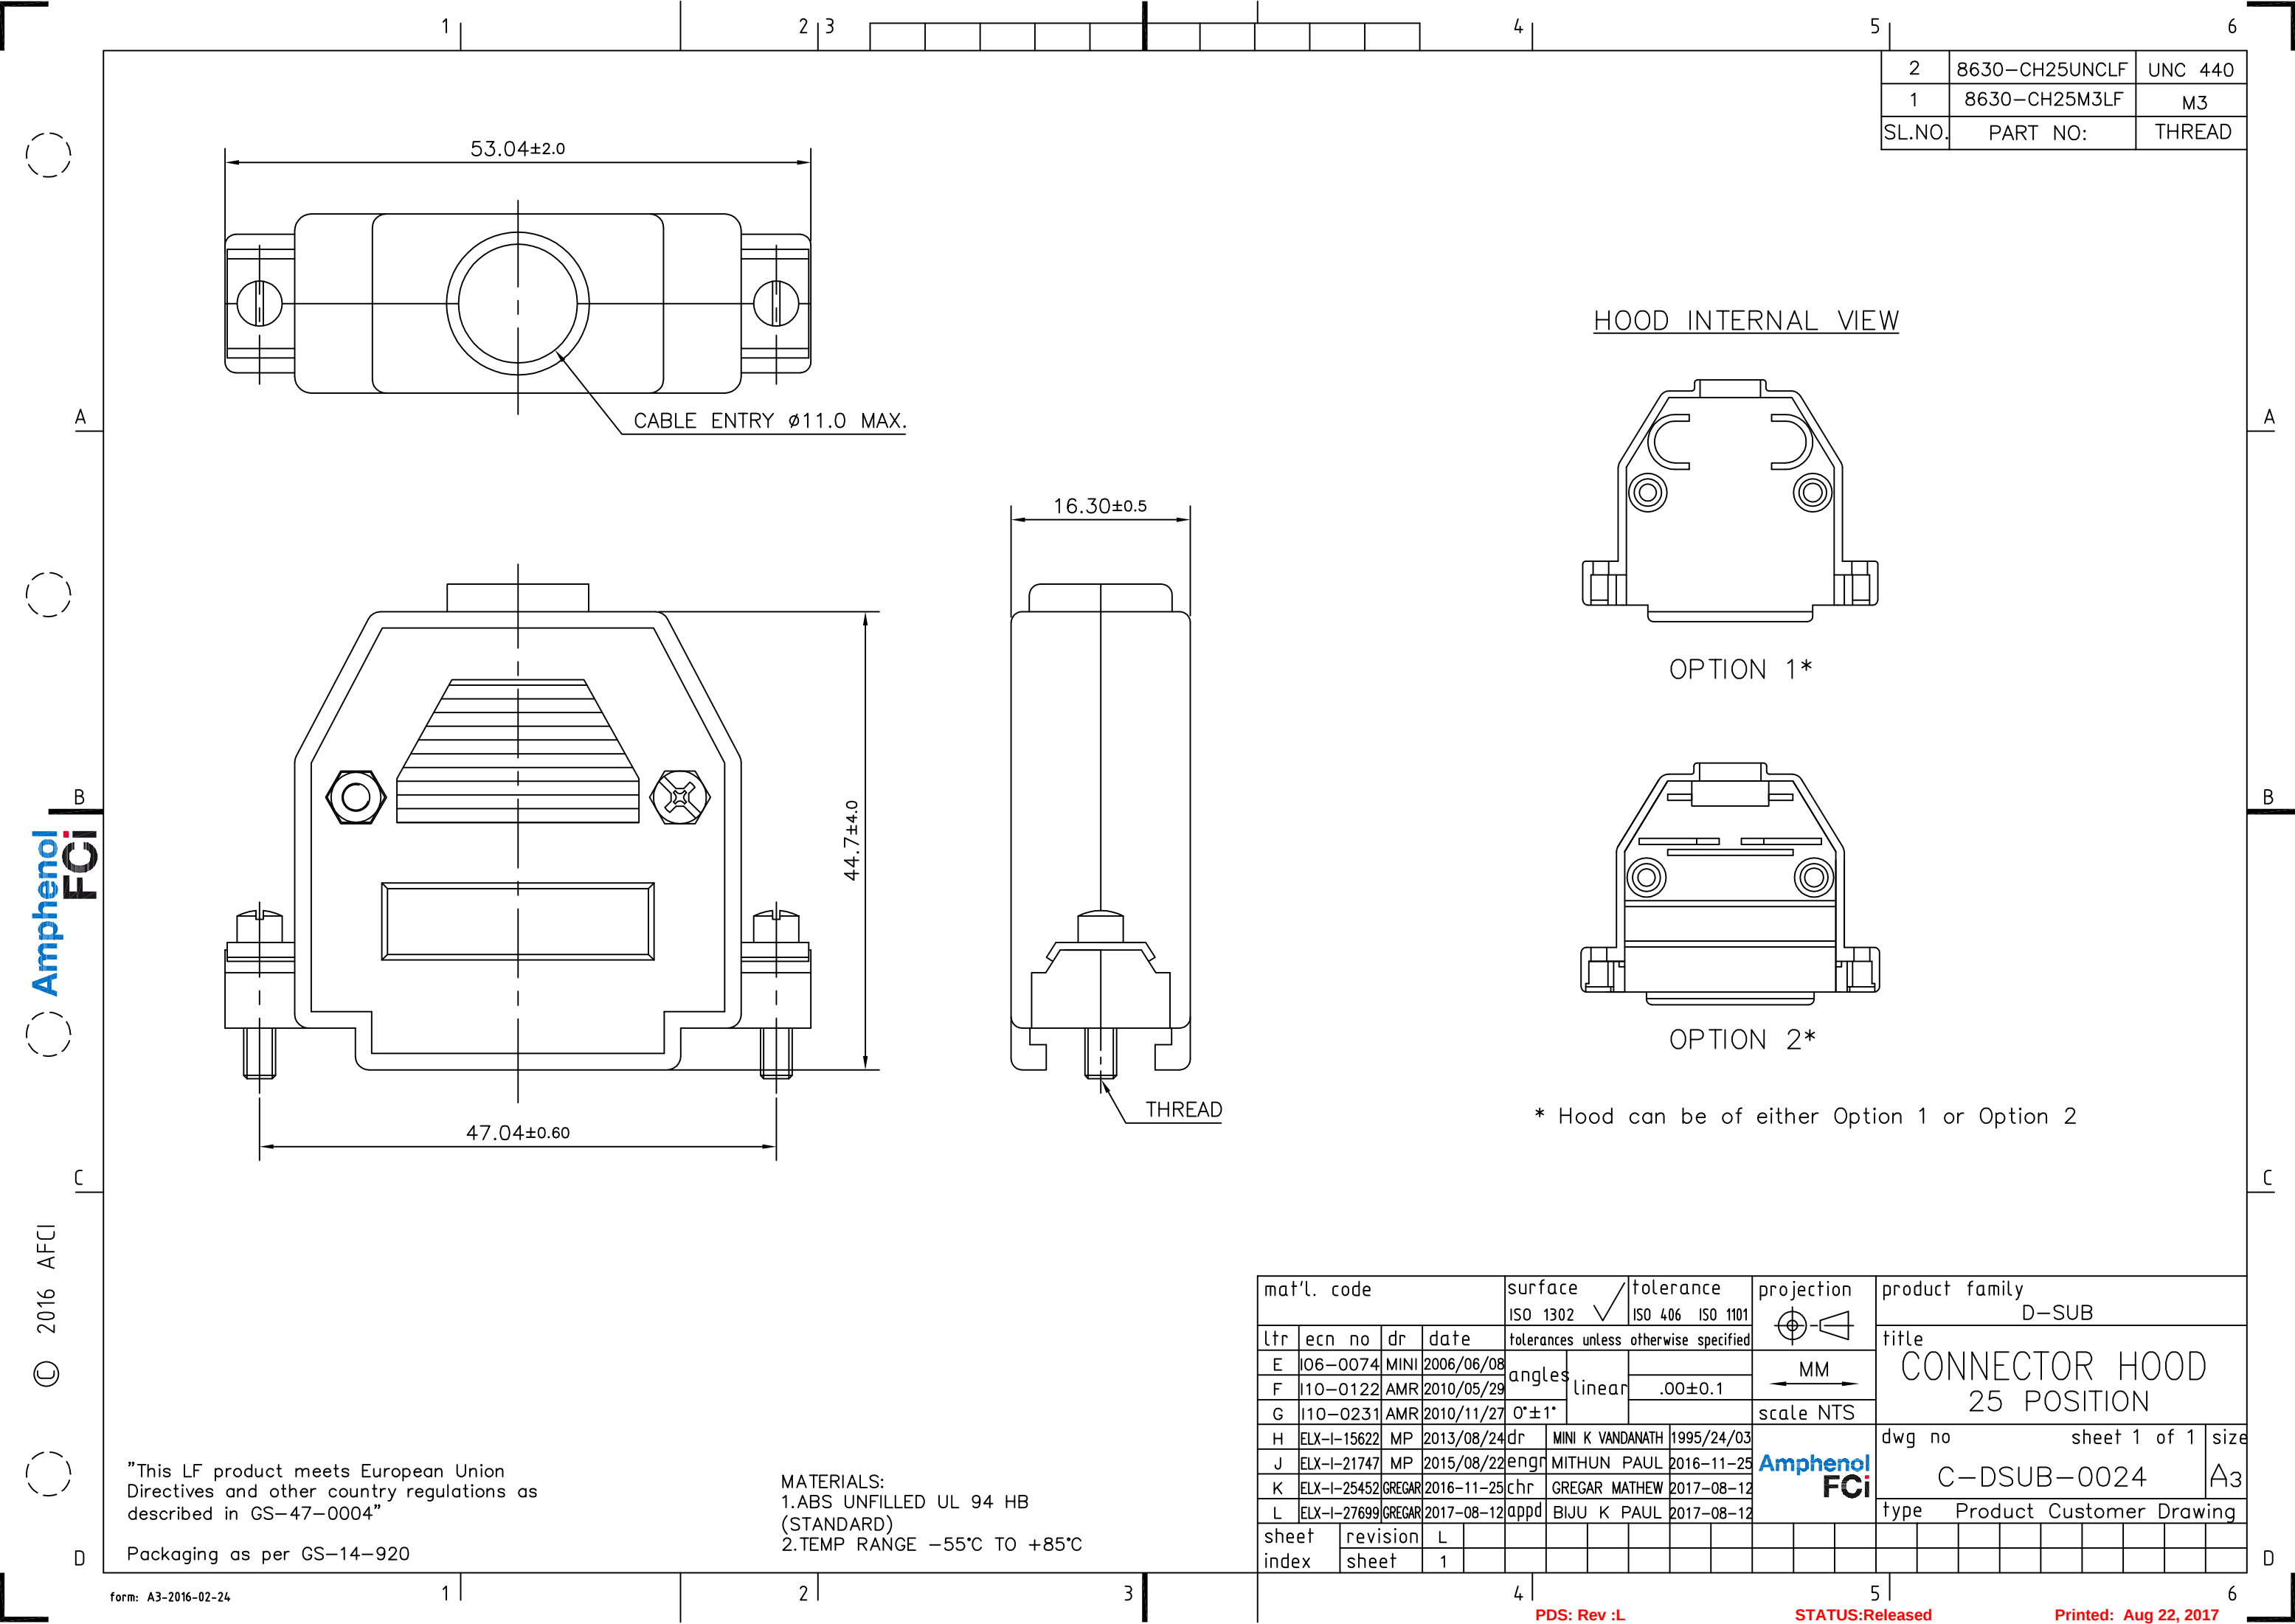


2	8630-CH25UNCLF	UNC 440
1	8630-CH25M3LF	M3
SL.NO.	PART NO:	THREAD

HOOD INTERNAL VIEW

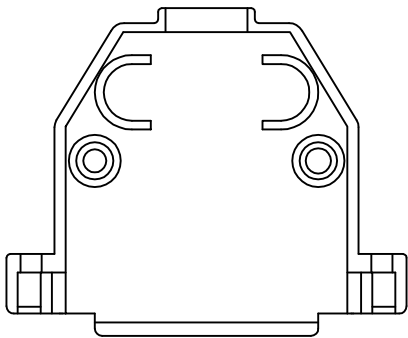

OPTION 1*

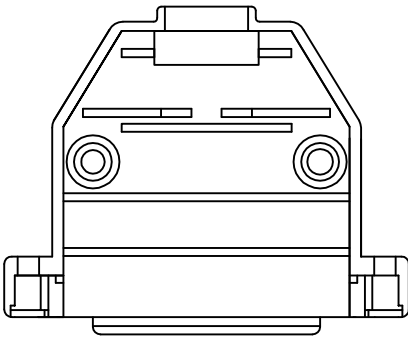

OPTION 2*

* Hood can be of either Option 1 or Option 2

"This LF product meets European Union Directives and other country regulations as described in GS-47-0004"

Packaging as per GS-14-920

MATERIALS:
1.ABS UNFILLED UL 94 HB (STANDARD)
2.TEMP RANGE -55°C TO +85°C

mat'l. code				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection MM		product family D-SUB			
ltr	ecn no	dr	date	tolerances unless otherwise specified		linear		scale NTS		title CONNECTOR HOOD 25 POSITION			
E	I06-0074	MINI	2006/06/08	angles		linear		scale NTS		dwg no			
F	I10-0122	AMR	2010/05/29	0°±1°		linear		scale NTS		sheet 1 of 1			
G	I10-0231	AMR	2010/11/27	0°±1°		linear		scale NTS		size			
H	ELX-I-15622	MP	2013/08/24	dr		MINI K VANDANATH		1995/24/03		type			
J	ELX-I-21747	MP	2015/08/22	engr		MITHUN PAUL		2016-11-25		C-DSUB-0024			
K	ELX-I-25452	GREGAR	2016-11-25	chr		GREGAR MATHEW		2017-08-12		A3			
L	ELX-I-27699	GREGAR	2017-08-12	appd		BIJU K PAUL		2017-08-12		Product Customer Drawing			
sheet index		revision sheet		L									