


REV.	DATE	ECR NO.	DESCRIPTION
NC	02/17/98	—	INITIAL RELEASE
A	01/05/06	—	UPDATE DRAWING FORMAT
B	12/11/08	—	REVISE COUPLING BODY TO SILVER PLATING
C	03/24/09	—	REVISE INTERNAL BODY CONFIGURATION

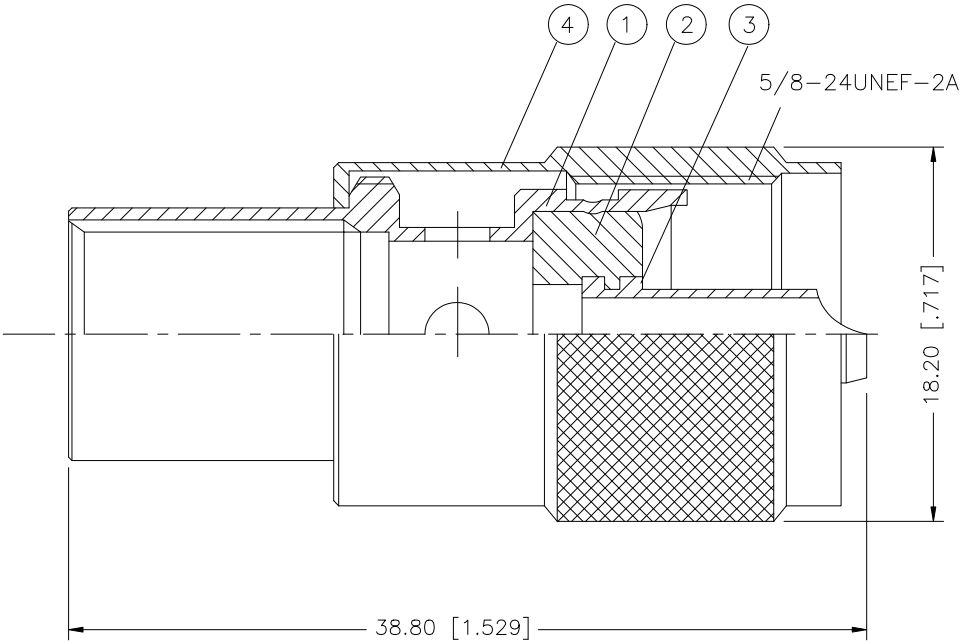

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex PART DESCRIPTION UHF SOLDER PLUG (FOR RG-8/U, 11/U CABLE) PART NO. 182116 DWG. NO.182116.DWG REV. C SIZE A SCALE NA				
8						DRAWN	GRS	03/24/09						
7						CHECKED								
6						ISSUED								
5						SHEET	1 OF 1							
4	CONTACT PIN	BRASS	SILVER	1		CAD FILE								
3	INSULATOR	BAKELITE BROWN	YELLOW	1		C:/182/182116.DWG								
2	BODY	BRASS	SILVER	1										
1	SHELL	BRASS	NICKEL	1										
	DESCRIPTION	MATERIAL	FINISH	QTY										