



Main

| | |
|------------------------------------|-------------------|
| Accessory / separate part category | Cabling accessory |
| Accessory / separate part type | Jumper cable |

Complementary

| | |
|-----------------------------|--|
| Jumper cable end 1 | M12 male, :3 pins (straight), fixing: screw-on |
| Jumper cable end 2 | M12 female, :3 pins (straight), fixing: screw-on |
| Collar material | Metal |
| Cable composition | 3 x 0.25 mm ² |
| Cable length | 6.56 ft (2 m) |
| Wire insulation material | PVC |
| Cable outer diameter | 0.18 in (4.6 mm) |
| System Voltage | 250 V AC 300 V DC |
| Line Rated Current | 3 A |
| Insulation resistance | >= 1000 MOhm |
| Resistance across terminals | <= 5000 mOhm |
| Product weight | 0.22 lb(US) (0.1 kg) |

Environment

| | |
|---------------------------------------|-------------------------------------|
| IP degree of protection | IP65 IP67 |
| product certifications | CULus |
| ambient air temperature for operation | -13...176 °F (-25...80 °C) (static) |
| ambient air temperature for storage | -13...176 °F (-25...80 °C) |


Offer Sustainability

| | |
|--|--|
| Not Green Premium product | Not Green Premium product |
| Compliant - since 1201 - Schneider Electric declaration of conformity | Compliant - since 1201 - Schneider Electric declaration of conformity |
| WARNING: This product can expose you to chemicals including: | WARNING: This product can expose you to chemicals including: |
| Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and | Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and |
| Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. | Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. |
| For more information go to www.p65warnings.ca.gov | For more information go to www.p65warnings.ca.gov |

Contractual warranty

| | |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|

Dimensions

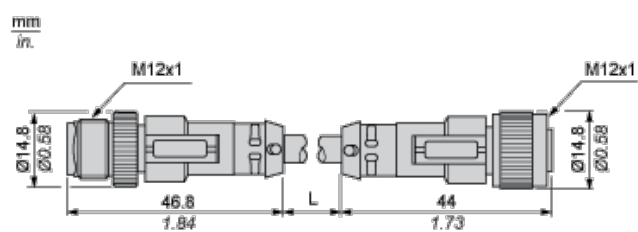

L : Length of cable

Connections and Schemes

