
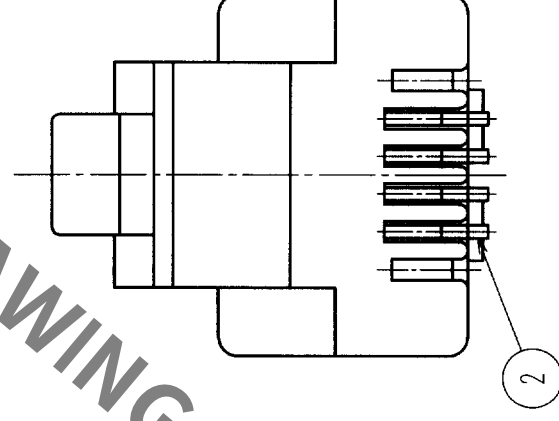
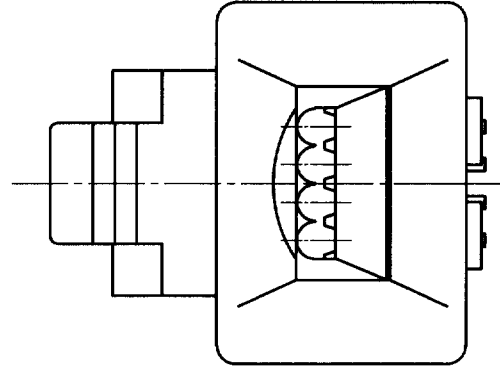
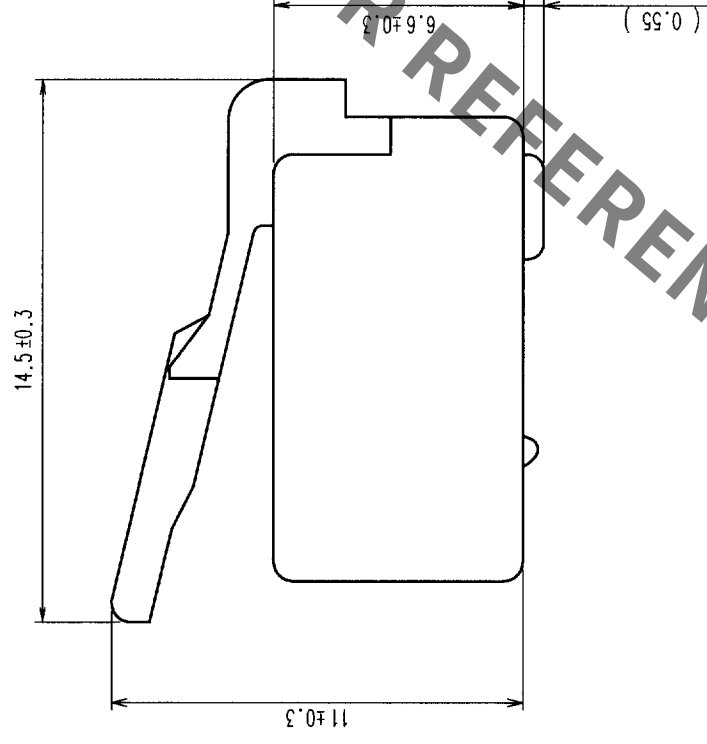


		DESCRIPTION OF REVISIONS		BY	CHKD	DATE			DESCRIPTION OF REVISIONS		BY	CHKD	DATE
	COUNT							COUNT					
△						•	•	△					•
△						•	•	△					•
△						•	•	△					•

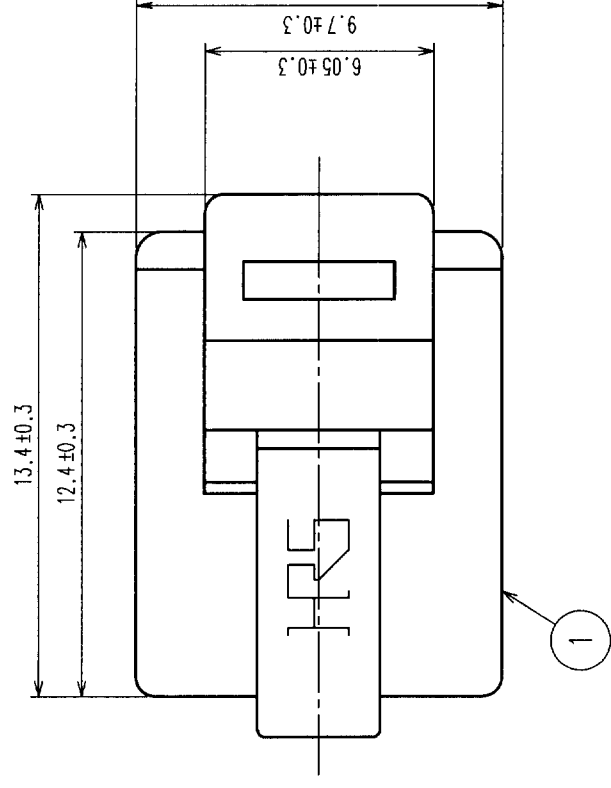

APPLICABLE CABLE		
Diagram labels: CONDUCTOR, INSULATION, JACKET, DRAIN WIRE. Dimensions: (φ 3.6), (7/φ0.18).	INSULATION (mm)	0.90~ 1.00
	JACKET (mm)	(φ3.6) ^{*1}
	DRAIN WIRE	(7/φ0.18) AWG25

NOTES: 1. () INDICATES THE REFERENCE DIMENSIONS.
 2. APPLICABLE CABLE DIMENSIONS AS SHOWN IN TABLE-1.
 * (1) THIS IS FOR REFERENCE.
 (DIMENSION VARIES ACCORDING TO JACKET HARDNESS)

1		POLYCARBONATE		TRANSPARENCY		2		PHOSPHOR BRONZE		GOLD PLATING 1.27 μ m	
NO.		MATERIAL		FINISH, REMARKS		NO.		MATERIAL		FINISH, REMARKS	
CODE NO. (OLD)				DRAWN		DESIGNED		CHECKED		APPROVED	
				S. Sato		S. Sato		T. Motomura		T. Motomura	
				01-09-03		01-09-03		01-09-03		01-09-03	
DRAWING NO.		EDC3-010354		PART NO.		TM4P-64P					
SCALE		5 : 1		CODE NO.		CL222-0280-2					
UNITS		mm		HIROSE ELECTRIC CO., LTD		1/1					

TO	Q2			
----	----	--	--	--