

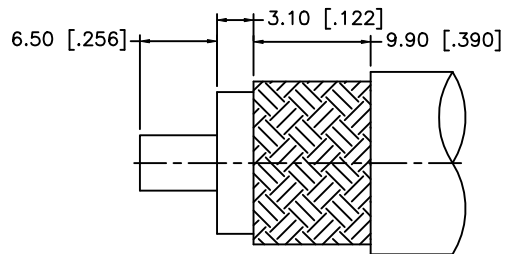
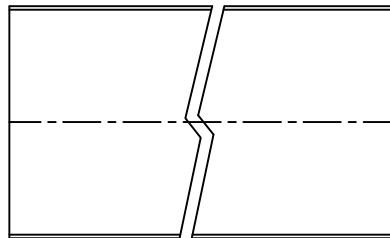
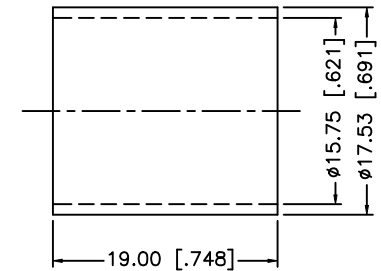


REV.	DATE	DESCRIPTION
NC	02/20/07	INITIAL RELEASE

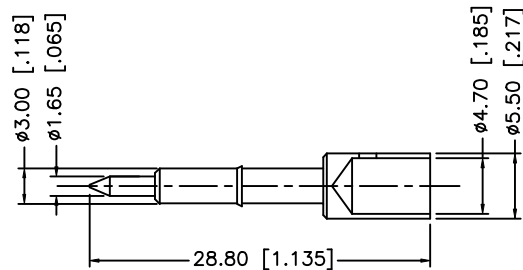

RECOMMENDED
CABLE STRIPPING DIM'S

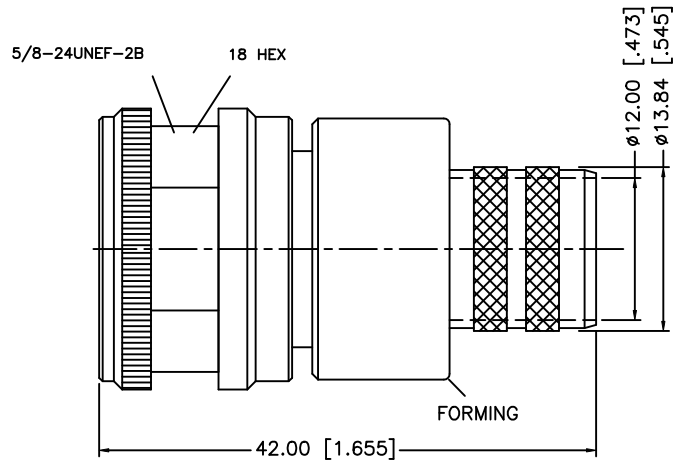

NOTE:

1. CRIMPED FERRULE HEX CRMP SIZE .600"
2. CONTACT PIN TO SOLDER.

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex										
8						DRAWN	G.R.S.	02/20/07												
7						CHECKED				PART DESCRIPTION N CRIMP PLUG – SP. HEX NUT (LMR 600 CABLE)										
6						ISSUED														
5	HEAT SHRINK TUBE					SHEET		1 OF 1							PART NO. 172206–10					
4	FERRULE	COPPER	NEXCOTE	1																
3	CONTACT PIN	BRASS	GOLD	1	CAD FILE C:/172/172206–10.DWG					DWG. NO. 172206–10.DWG					REV. NC		SIZE A		SCALE NA	
2	INSULATOR	TEFLON	NATURAL	1																
1	BODY	BRASS	NEXCOTE	1																
DESCRIPTION					MATERIAL	FINISH	QTY													