

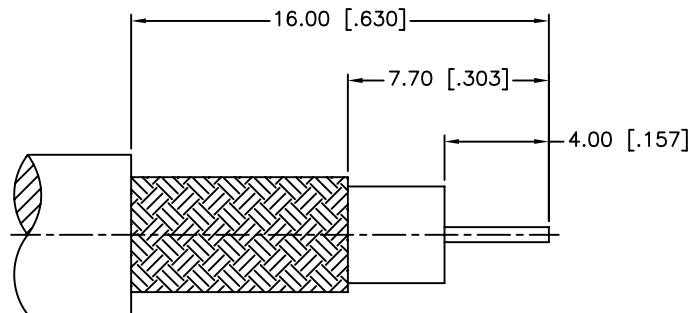
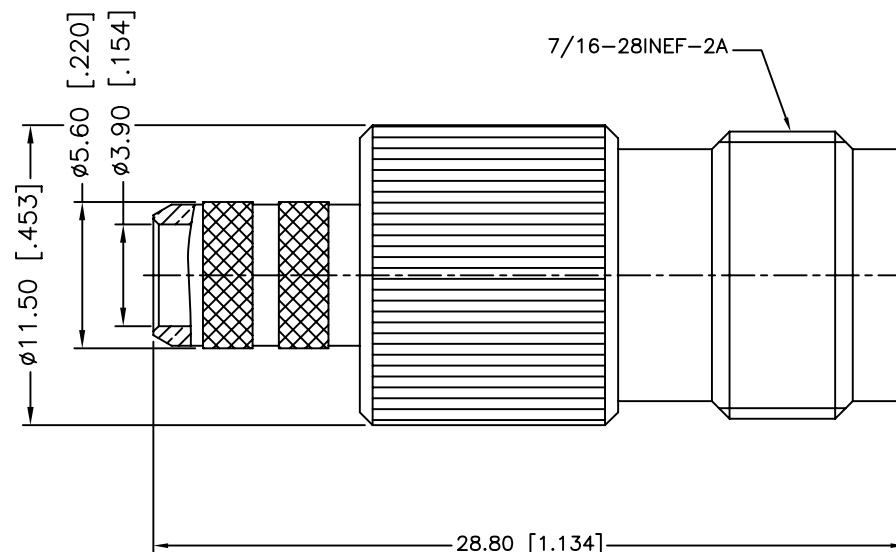


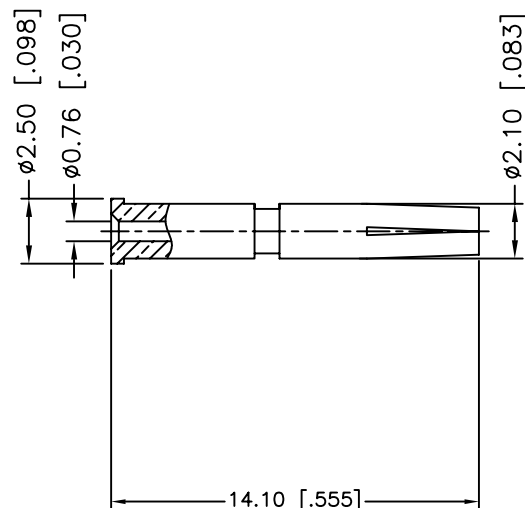

RECOMMENDED
CABLE STRIPPING DIM'S

REV.	DATE	ECR NO.	DESCRIPTION
NC	06/23/10	XXXXXX	INITIAL RELEASE

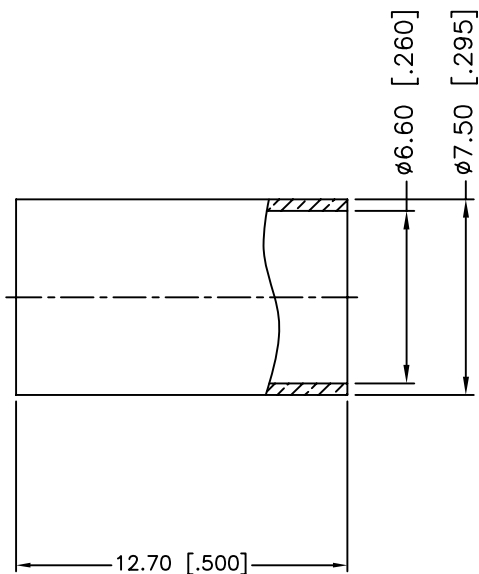

1. CRIMPED FERRULE
HEX CRIMP SIZE .255"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

5 FERRULE BRASS NICKEL 1 4 CONTACT PIN PHOSPHOR BRONZE GOLD 1 3 INSULATOR DELRIN NATURAL 1 2 BODY BRASS NICKEL 1 1 HOUSING BRASS NICKEL 1				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm $\pm$ 0.20mm 8 - 30mm $\pm$ 0.40mm 30 - 120mm $\pm$ 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 $\pm$ 0.007" .315 - 1.180 $\pm$ 0.015" 1.180 - 4.724 $\pm$ 0.020" DO NOT SCALE DRAWING		APPROVALS DRAWN M.ZHANG CHECKED ISSUED SHEET 1 OF 1 CAD FILE C:/CONNEX/122125.DWG		DATE 06/23/10		Amphenol Connex PART DESCRIPTION TNC CRIMP JACK - 75 OHM (FOR RG-59/U CABLE) PART NO. 122125				DWG. NO. 122125.DWG		REV. NC	SIZE A	SCALE NA
---	--	--	--	--	--	--	--	------------------	--	--	--	--	--	---------------------	--	---------	--------	----------