



	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
		REWRITTEN BY CAD	Y.S	Y.E	07.03.16						. .
	3	DIS-E-001346	Y.S	Y.E	07.03.16						. .
											. .

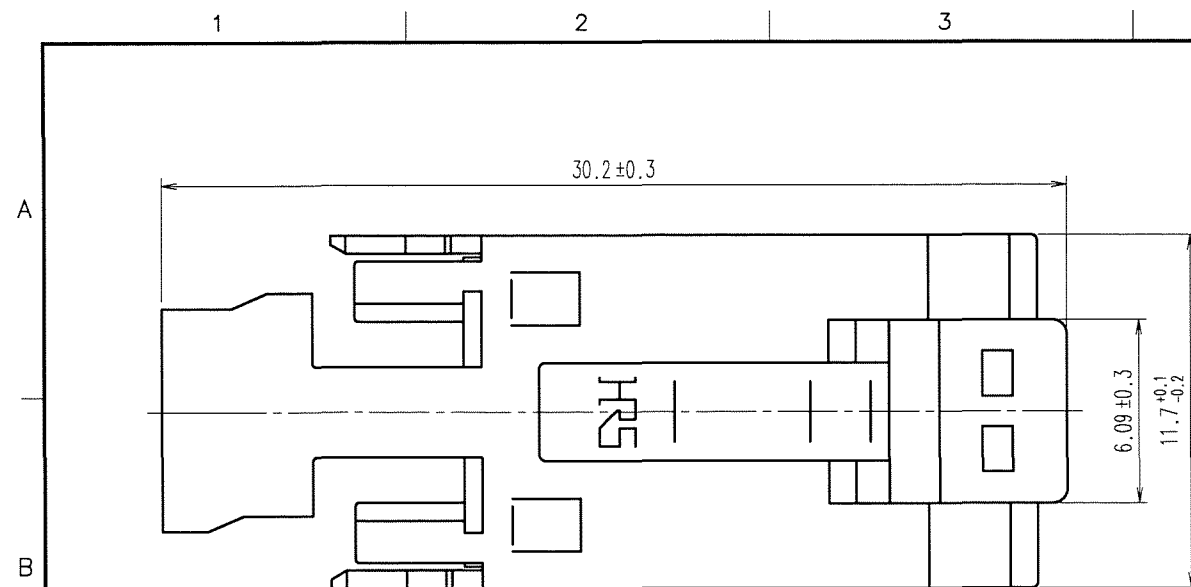




NOTES. 1. APPLICABLE CABLE.

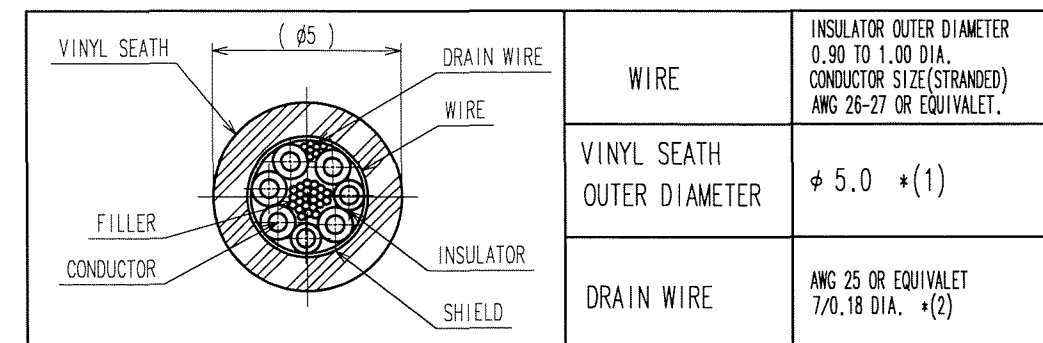




* (1) CABLE ENTRY IS 5.6 MIN.

* (2) CONSTRUCTION IS FOR REFERENCE.

HOOD (2 : 1)

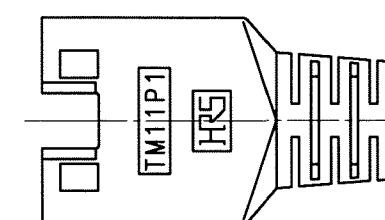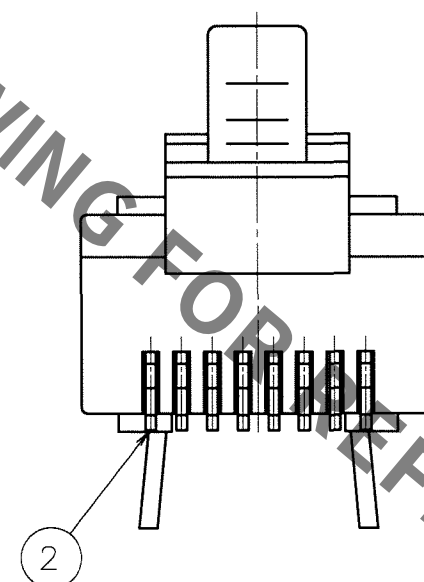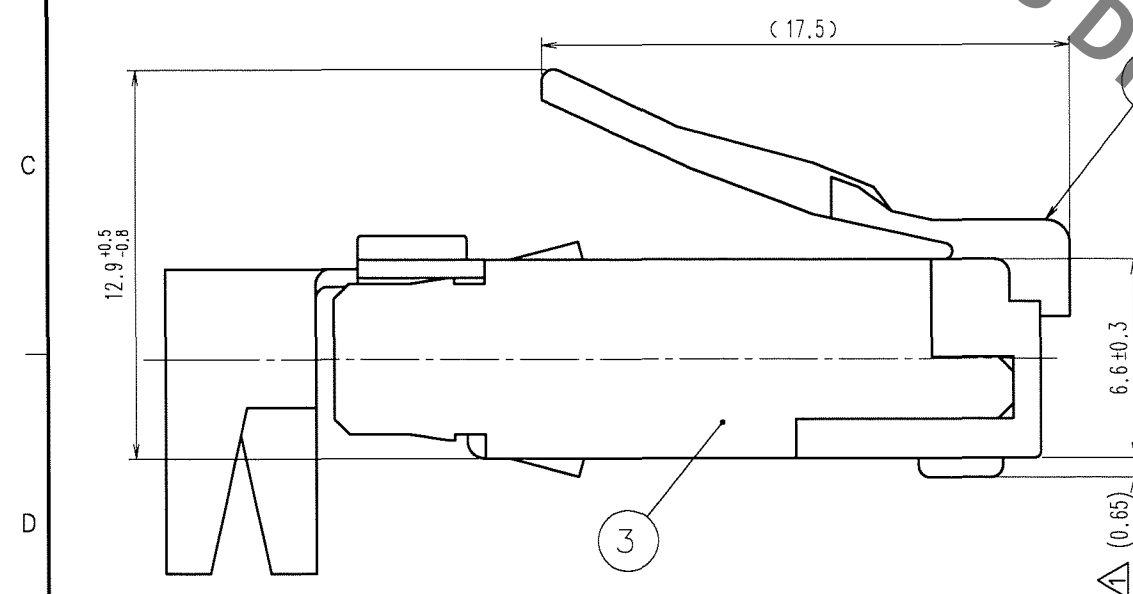

ADAPTER

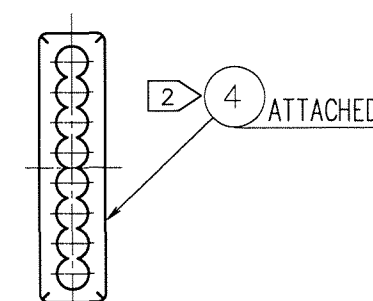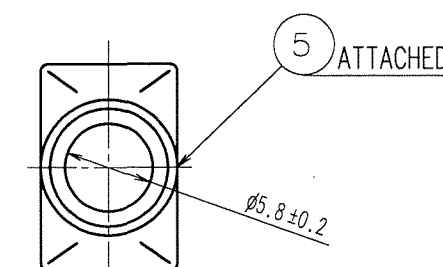

2 ADAPTER SHALL BE USED TO ALIGN INDIVIDUAL WIRE.

3. THE DIMENSION IN PARENTHESIS IS FOR REFERENCE.

2	PHOSPHOR BRONZE 	CONTACT: GOLD PLATING 1.27 μm min TERMINAL: GOLD PLATING 0.03 μm min UNDER: NICKEL PLATING 2 μm min	5	POLYCARBONATE	LIGHT BEIGE
			4	POLYCARBONATE	TRANSPARENCY
1	POLYCARBONATE	TRANSPARENCY	3	BRASS 	OVER: TIN REFLOW PLATING 1 μm min UNDER: COPPER PLATING 0.5 μm min
NO	MATERIAL	FINISH, REMARKS	NO	MATERIAL	FINISH, REMARKS

NO.	INTERVIEW	STATUS, REMARK	NO.	INTERVIEW	STATUS, REMARK
CODE NO. (OLD)			DRAWN	DESIGNED	CHECKED
			T.WATANABE	T.WATANABE	H.MIWA
			96.09.25	96.09.25	96.09.25
					A.NAKAZAWA
					96.09.25
					.
					.

	DRAWING NO.	PART NO.
	SCALE 4 : 1	EDC3-120681 TM11AP1-88P
UNITS mm	 HIROSE ELECTRIC CO., LTD	CODE NO. CL222-2782-1

TO
Q2