


Dimensions (In.)

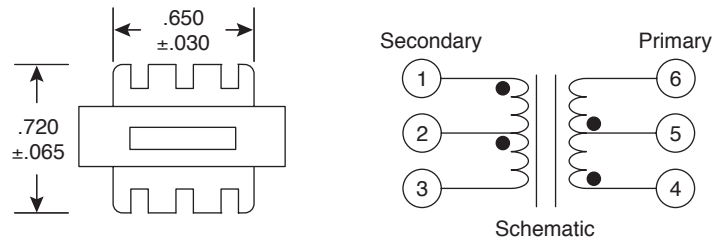

Specifications

- Core type / size: EI-24
- Impedance variation: ±10% @ 1KHz
- D.C. resistance: ±15%
- Isolation voltage(primary to secondary): 100VDC min. @ 10MΩ
- Breakdown voltage: 100VAC hipot for 1 minute
- Insulation: >10MΩ @ 100VDC
- Max. output: 460mW
- Frequency response: ±3dB, 300-3.4KHz @ 1KHz 0dB
- Waxing: vacuum treatment
- Can be water washed with water temperature less than 20°C
- RoHS Compliant

Mouser Stock No.	Impedance		Resistance	
	Primary	Secondary	Primary	Secondary
42TU002-RC	10KΩ	2KΩ	600Ω	155Ω
42TU003-RC	1.2KΩ	8Ω	75Ω	1Ω
42TU008-RC	800Ω	8Ω	40Ω	1Ω
42TU011-RC	1.5KΩ	500Ω	120Ω	50Ω
42TU012-RC	10KΩ	5KΩ	425Ω	220Ω
42TU013-RC	1KΩ	8Ω	75Ω	1Ω
42TU016-RC	600Ω	600Ω	65Ω	55Ω
42TU019-RC	10KΩ	600Ω	600Ω	100Ω
42TU048-RC	48Ω	8Ω	2.5Ω	0.5Ω
42TU120-RC	120Ω	8Ω	7Ω	0.7Ω
42TU200-RC	200Ω	8Ω	12Ω	0.5Ω
42TU400-RC	500Ω	8Ω	18Ω	0.7Ω
42TU500-RC	500Ω	500Ω	35Ω	28Ω

