
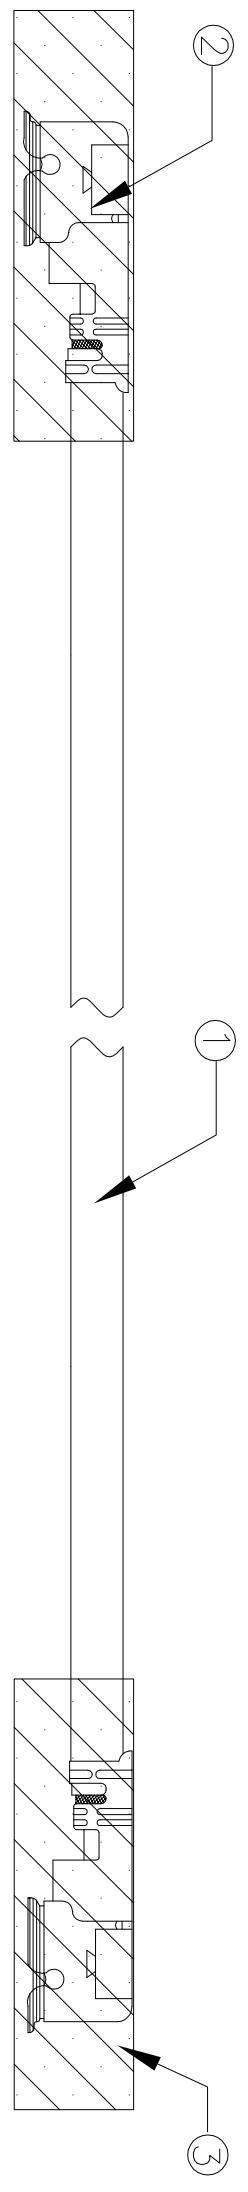


LOC	DIST	REVISONS	
GP	00	P	LTR
		A	NEW RELEASE
		12FEB09	CP LZ

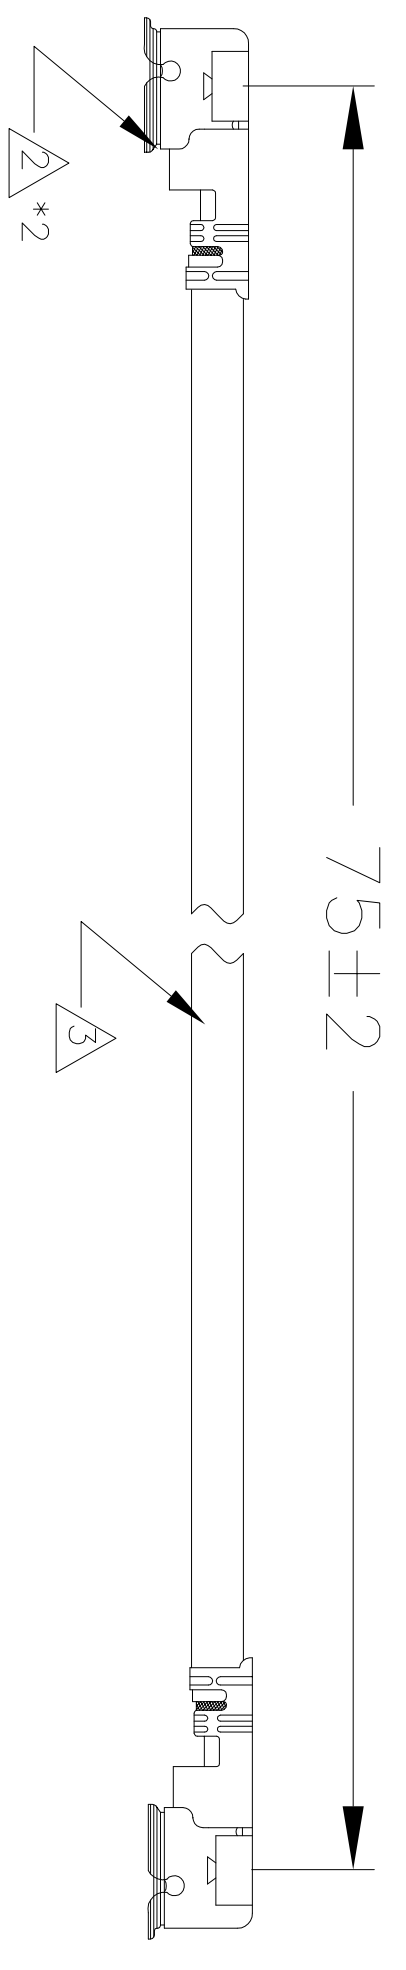

- NOTES:
1. CABLE ASSEMBLY TO BE 100% TESTED FOR OPENS, SHORTS AND CONTINUITY  
 HI-POT: 200 VDC FOR 100MS  
 INSULATION RESISTANCE: 50M OHMS MIN  
 CONTINUITY RESISTANCE: 2 OHMS MAX  
 FREQUENCY RANGE: DC TO 6 GHZ  
 VSWR: 1.5:1 MAX
  2. CONNECTOR: TYPE III U.FL  
 SUPPLIER: I-PEX 20278-112R-13
  3. CABLE: 1.13MM OD, JACKET RED, 50 OHMS FEP INSULATED  
 SUPPLIER: GBE OR TE ENGINEERING APPROVED SUPPLIER
  4. TWO END U.FL CONNECTORS IN THE SAME POSITION
  5. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TYCO ELECTRONICS STANDARD 230-702

30	MM	PROTECT TUBING FOR I-PEX 20278	3
2	PC	I-PEX 20278-112R-13 CONNECTOR	2
75	MM	COAXIAL CABLE, RED COLOR, OD 1.13MM	1
-1	U/M	DESCRIPTION	ITEM

DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
0	PLC	±	-
1	PLC	±	-
2	PLC	±	-
3	PLC	±	-
4	PLC	±	-
	ANGLES	±	-
	FINISH	±	-

DWN	12FEB09	Chen Ping
CHK	12FEB09	Andrew Dong
APVD	12FEB09	Lucky Zhang
PRODUCT SPEC		
APPLICATION SPEC		
WEIGHT		