

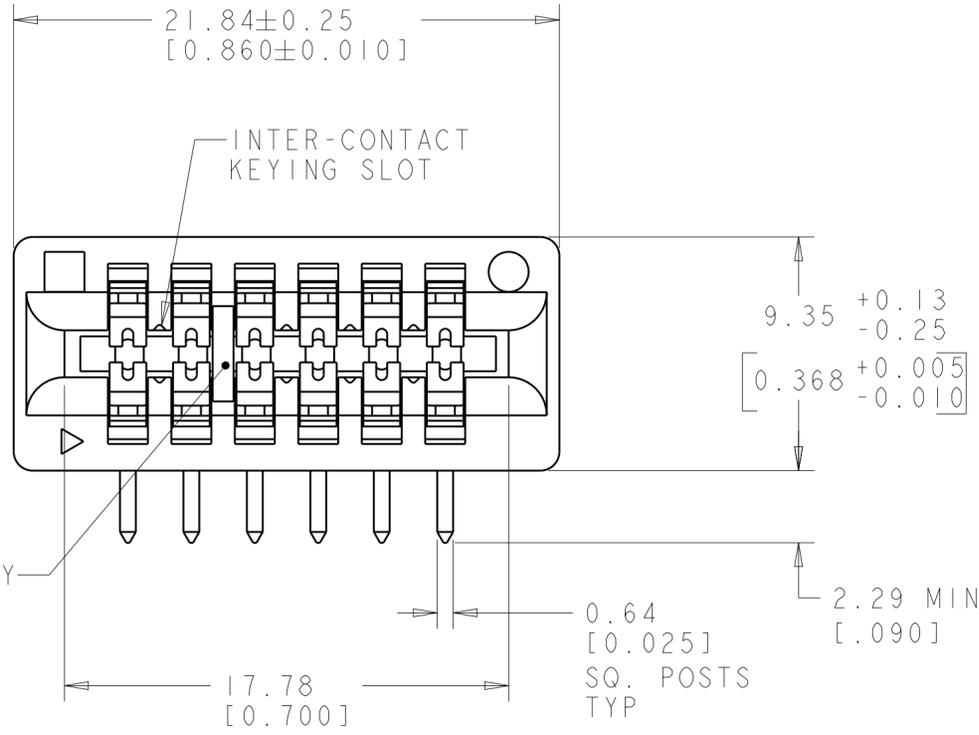


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			AI	RELEASED PER ECR-13-012700	12AUG2013	AY	SZ

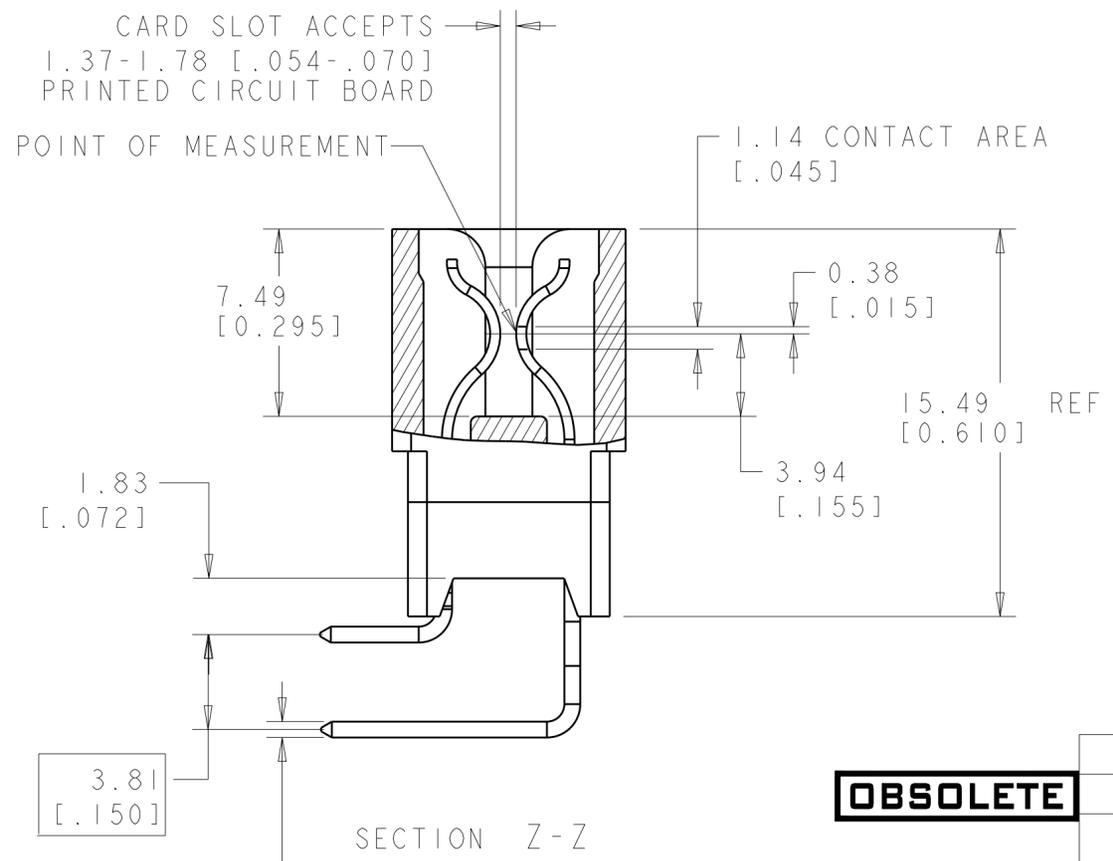

- ① HOUSING: GLASS FILLED POLYESTER; COLOR: BLACK
- ② CONTACT: PHOSPHOR BRONZE
- ③ NICKEL UNDERPLATE: 0.00127[.000050] MIN - ALL OVER.
- ④ TIN PLATE: 0.00254 [0.000100] MIN - SOLDER POSTS
- ⑤ GOLD PLATE: 0.00076 [0.000030] MIN - CONTACT AREA
- ⑥ NICKEL PLATE PER MIL-G-45204. GOLD PLATE PER QQ-N-290
- ⑦ TYCO ELECTRONICS P/N, CSA LOGO AND DATE CODE ARE MARKED IN APPROXIMATE AREA SHOWN, EITHER SIDE.
- 8. RECOMMENDED PCB FINISHED HOLE DIA: 1.07±0.08 [0.042±.003]
- ⑨ CONNECTOR SUPPLIED WITH POLARIZING KEY, P/N 650025-2, INSTALLED

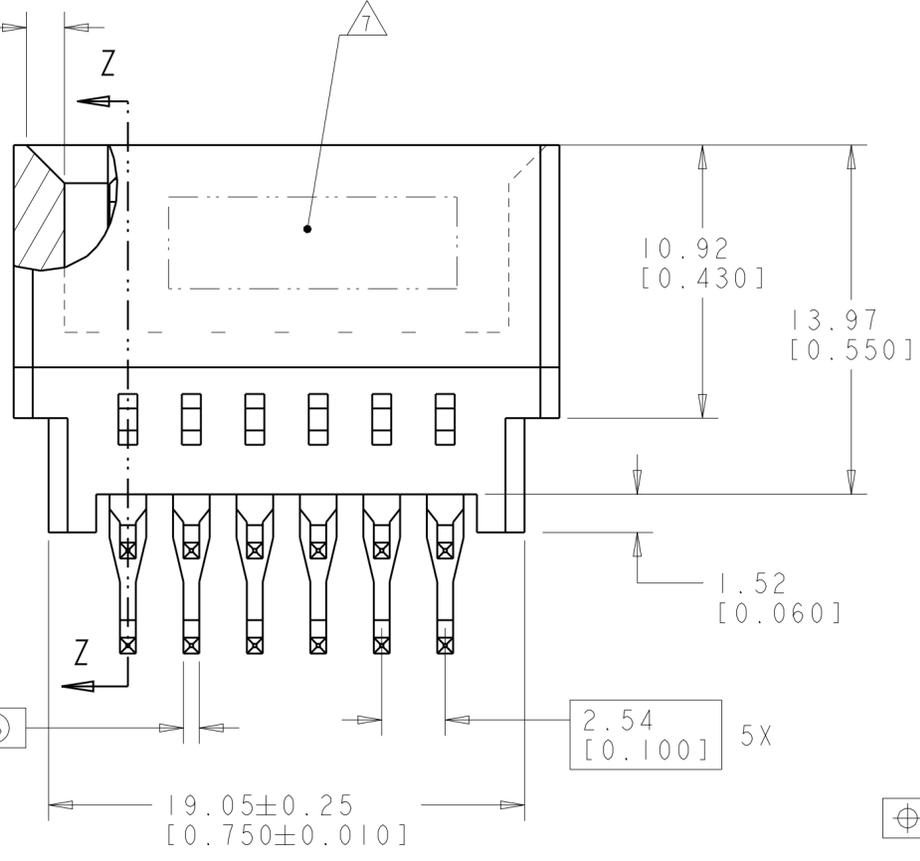

OBSOLETE

AS SHOWN	2110669-2⑨
AS SHOWN	2110669-1⑨
DESCRIPTION	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN R. GRZYBOWSKI 07MAY09	CHK E. HOWARD 07MAY09	APVD M. PERCHERKE 07MAY09
0 PLC ±	1 PLC ±	2 PLC ±0.13 [0.005]	3 PLC ±	4 PLC ±
MATERIAL		FINISH		
① ② -		③ ④ ⑤ ⑥		

TE Connectivity

CONNECTOR ASSEMBLY STANDARD EDGE II 2.54 [0.100] CL

SIZE: A2 CAGE CODE: 00779 DRAWING NO: C-2110669

SCALE: 5:1 SHEET 1 OF 1 REV: AI