

## Device connector, rear mounting - CA-07P1N8AHZ00 - 1619844

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Device connector for rear wall, straight, shielded: Yes, SPEEDCON locking, M23, Number of positions: 7, Type of contact: Male connector, Crimp connection, Seal, axial, Central fixing

The figure shows the 12-pos. product version

### Product Features



### Key commercial data

|                      |          |
|----------------------|----------|
| Packing unit         | 1 pc     |
| Custom tariff number | 85366990 |
| Country of origin    | Germany  |

### Technical data

#### Temperature range

|                                 |                   |
|---------------------------------|-------------------|
| Ambient temperature (operation) | -40 °C ... 125 °C |
|---------------------------------|-------------------|

#### Data of the insulating body

|                                                    |                                                          |
|----------------------------------------------------|----------------------------------------------------------|
| Note                                               | Order information Order crimp contacts Ø 2 mm separately |
| Insulator material                                 | PA 66                                                    |
| Direction of rotation of contact chamber numbering | Standard                                                 |
| Coding                                             | N                                                        |
| Contact connection method                          | Crimp connection                                         |
| Type of contacts                                   | Male connector                                           |
| Number of positions                                | 7                                                        |
| Contact diameter of power contacts                 | 2 mm                                                     |
| Nominal current per power contact at 25°C          | 20 A                                                     |
| Nominal voltage, power contact                     | 300 V                                                    |
| Surge voltage category                             | II                                                       |

## Device connector, rear mounting - CA-07P1N8AHZ00 - 1619844

### Technical data

#### Data of the insulating body

|                  |   |
|------------------|---|
| Pollution degree | 3 |
|------------------|---|

#### Housing data

|                                        |                                                                      |
|----------------------------------------|----------------------------------------------------------------------|
| Housing material                       | Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn) |
| Type of locking                        | SPEEDCON locking                                                     |
| Degree of protection (when plugged in) | IP67                                                                 |
| Thread type                            | M23                                                                  |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27143424 |
| eCl@ss 5.1 | 27143424 |
| eCl@ss 6.0 | 27143424 |
| eCl@ss 7.0 | 27440209 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002635 |
| ETIM 5.0 | EC002635 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 43172015 |
| UNSPSC 7.0901 | 43201404 |
| UNSPSC 11     | 43172015 |
| UNSPSC 12.01  | 43201404 |
| UNSPSC 13.2   | 43201404 |

### Approvals

#### Approvals

#### Approvals

UL Recognized / cUL Recognized / cULus Recognized

Device connector, rear mounting - CA-07P1N8AHZ00 - 1619844

Approvals

Ex Approvals

Approvals submitted

Approval details


|                                                                                                 |       |
|-------------------------------------------------------------------------------------------------|-------|
| UL Recognized  |       |
| mm²/AWG/kcmil                                                                                   | 14    |
| Nominal current IN                                                                              | 17 A  |
| Nominal voltage UN                                                                              | 300 V |

|                                                                                                    |       |
|----------------------------------------------------------------------------------------------------|-------|
| cUL Recognized  |       |
| mm²/AWG/kcmil                                                                                      | 14    |
| Nominal current IN                                                                                 | 10 A  |
| Nominal voltage UN                                                                                 | 300 V |


|                                                                                                      |  |
|------------------------------------------------------------------------------------------------------|--|
| cULus Recognized  |  |
|------------------------------------------------------------------------------------------------------|--|

Drawings

Schematic diagram




Dimensional drawing



## Device connector, rear mounting - CA-07P1N8AHZ00 - 1619844

Dimensional drawing

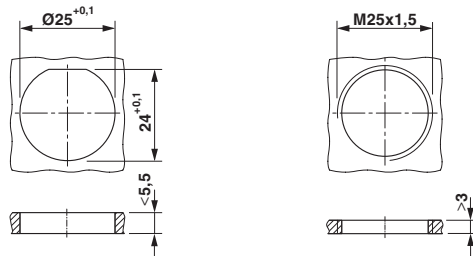

### Installation dimensions

---

Phoenix Contact 2015 © - all rights reserved  
<http://www.phoenixcontact.com>