

Housing screw connection - SACC-M12-SCO NUT L 90 - 1432460

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



M12-SPEEDCON housing screw connection for M12 female inserts, with flat gasket, for all Speedcon-compatible THR and wave soldering contact carriers

Key commercial data

Packing unit	0
Minimum order quantity	10
Catalog page	Page 58 (PC-2011)
GTIN	 4 046356 410731
Custom tariff number	85366990
Country of origin	GERMANY

Technical data

General data

Ambient temperature (operation)	-25 °C ... 85 °C
---------------------------------	------------------

General characteristics

Contact material	CuZn
Contact surface material	Ni/Au
Contact carrier material	PA 66
Material of grip body	Zinc die-cast, nickel-plated
Material, knurls	Zinc die-cast, nickel-plated
Material	Zinc die-cast (nickel-plated)
Sealing material	FKM
Mounting type	M12 x 1

Conductor data

Classifications

eclass

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313

Housing screw connection - SACC-M12-SCO NUT L 90 - 1432460

Classifications

eclass

eCl@ss 5.0	27143423
eCl@ss 5.1	27143423
eCl@ss 6.0	27143423
eCl@ss 7.0	27449001

etim


ETIM 3.0	EC002350
ETIM 4.0	EC002350

unspsc


UNSPSC 6.01	31251501
UNSPSC 7.0901	31251501
UNSPSC 11	31251501
UNSPSC 12.01	31251501
UNSPSC 13.2	31251501

Drawings

Dimensioned drawing

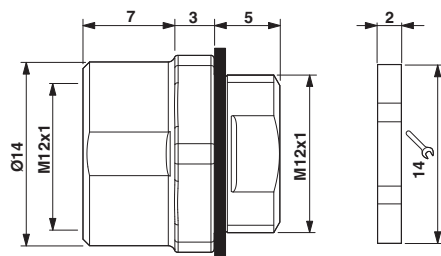

Dimensioned drawing

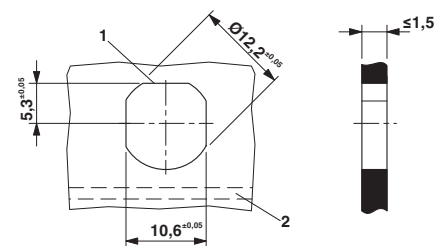

Housing cutout for M12 fastening thread, mounting panel with feed-through hole (alternative with surface as protection against rotation)