


Within Series Adaptor 46_SMB-50-0-2/111_N

Description

T-adaptor, 3 jacks
SMB jack (female) / SMB jack (female)

Interface standard
Series SMB - IEC 60169-10_MIL-STD-348A/311_CECC 22130

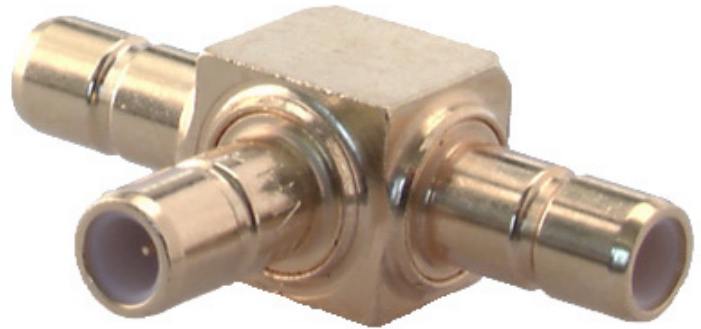

Technical Data

Electrical Data

Impedance 50 Ω
Interface frequency max. 4 GHz

Mechanical Data

Number of matings 500
Weight 0.0029 kg

Environmental Data

Operating temperature -65 °C to 165 °C
2011/65/EU (RoHS - including
2015/863 and 2017/2102) not compliant

Material Data

Interface - SMB jack (female)

| Piece Parts | Material | Surface Plating |
|----------------|------------|-----------------------------------|
| Centre contact | Brass | Gold Plating (Nickel underplated) |
| Outer contact | Brass | Gold Plating (Nickel underplated) |
| Body | Brass | Gold Plating (Nickel underplated) |
| Insulator | PFA / PTFE | |

Interface - SMB jack (female)

| Piece Parts | Material | Surface Plating |
|----------------|------------|-----------------------------------|
| Centre contact | Brass | Gold Plating (Nickel underplated) |
| Outer contact | Brass | Gold Plating (Nickel underplated) |
| Body | Brass | Gold Plating (Nickel underplated) |
| Insulator | PFA / PTFE | |

Related Documents

Catalogue drawing DCA-00013519

Ordering Information

Single package 46_SMB-50-0-2/111_NE

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[HUBER+SUHNER:](#)

[46_SMB-50-0-2/111_NE](#)