


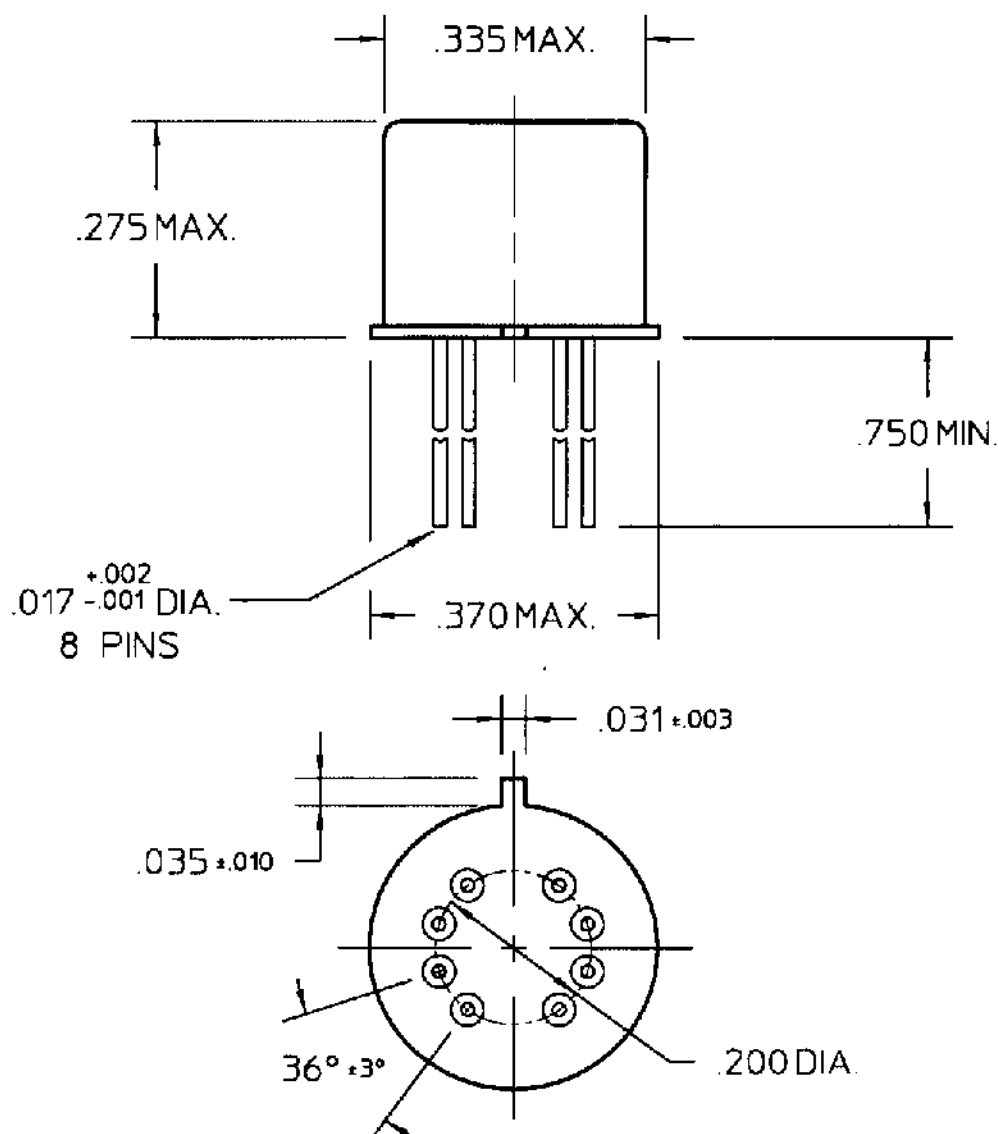


COIL: @ 25°C
 RESISTANCE _____ 50 OHMS $\pm$ 10%
 NOMINAL VOLTAGE _____ 5.0 VDC
 MUST OPERATE _____ 3.6 VDC
 MUST RELEASE _____

ENVIRONMENT:

VIBRATION _____ 10 _____ CPS TO _____ 500 _____ CPS @ _____ 10 _____ g's
 SHOCK _____ 30 _____ g's _____ 6 _____ MS. DURATION
 TEMPERATURE _____ -55 _____ °C TO _____ +85 _____ °C

NOTES: _____ OPERATE TIME 4.0 MS MAX.
 _____ RELEASE TIME 6.0 MS MAX.

CUSTOMER DATA SHEET



CONTACT RATING: _____ LOW LEVEL TO 1A
 _____ 28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 4/28/98 *ERD* 4/21/98

COMMUNICATIONS
INSTRUMENTS, INC.

HMD-5B

CUST. _____ C. I. I. STD.
 CUST. NO. _____

TYPE HMD RELAY