

REVISIONS					
P	LTR	DESCRIPTION	DATE	DMN	APVD
B		REVISED PER ECO-08-023819	25SEP08	HMR	MS
C		REVISED PER ECO-17-001163	27APR2017	RK	PO



SPECIFICATIONS

MATERIALS:
 CASE, PPS UL94V-0, BLACK
 COVER, PBT UL94V-0, BLACK
 ACTUATOR, 46 NYLON UL94V-0, WHITE
 TERMINAL/FIXED CONTACT- COPPER ALLOY- GOLD OVER NICKEL PLATE
 MOVING CONTACT- COPPER ALLOY- GOLD FLASH OVER NICKEL PLATE
 HOLDER, COPPER ALLOY, TIN OVER NICKEL FINISH

ELECTRICAL:
 RATING- 1a max non-switching
 0.1µA (1mV) min switching
 DC 5V 10mA INITIAL
 CONTACT RESISTANCE- 50milliohm max. (300 milliohms after test)
 INSULATION RESISTANCE- 100Megohms min. at 100V DC
 DIELECTRIC STRENGTH- 300V RMS@SEA LEVEL
 LIFE EXPECTANCY- 1,000 CYCLES

MECHANICAL:
 ACTUATION FORCE- 2.45 +/-1.47N (245 +/-147 GF)
 TRAVEL- 33°

ENVIRONMENTAL:
 OPERATING TEMPERATURE- -30 TO +85 DEGREES C
 STORAGE TEMPERATURE- -45 TO +100 DEGREES C
 RESISTANCE TO SOLDER HEAT- 265 +/-3°C for 8 +/-2 seconds
 SOLDERABILITY PER JIS-C-0050 & JIS-C-0053

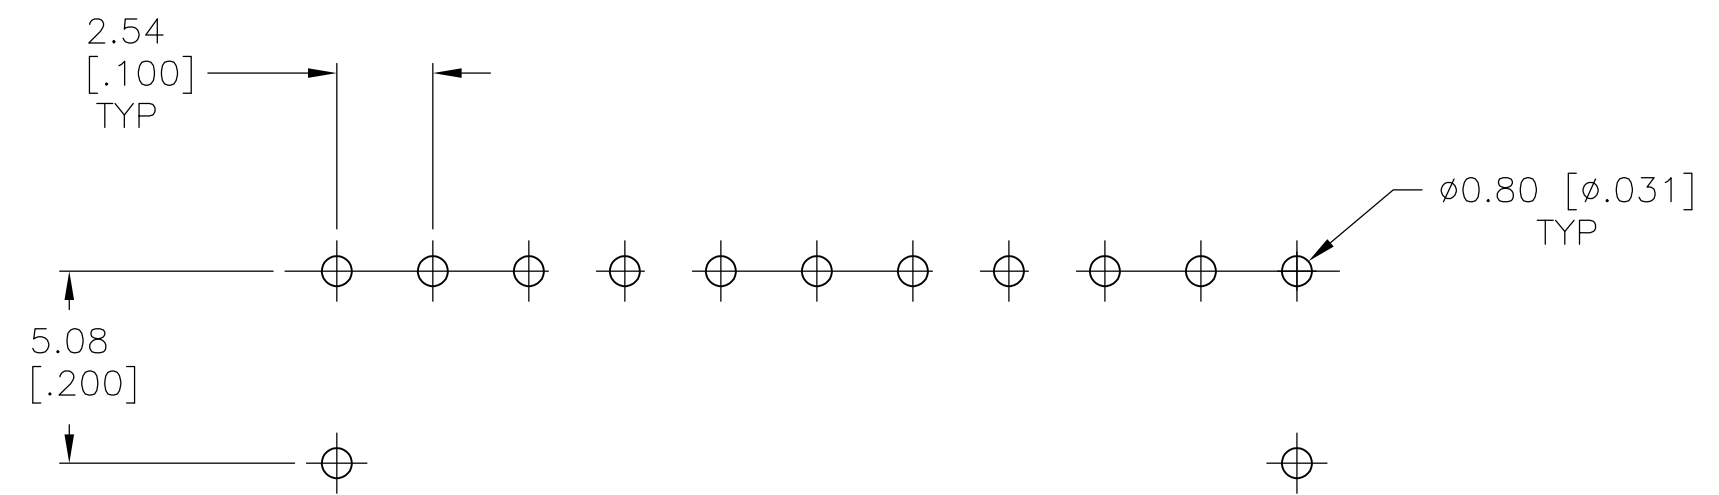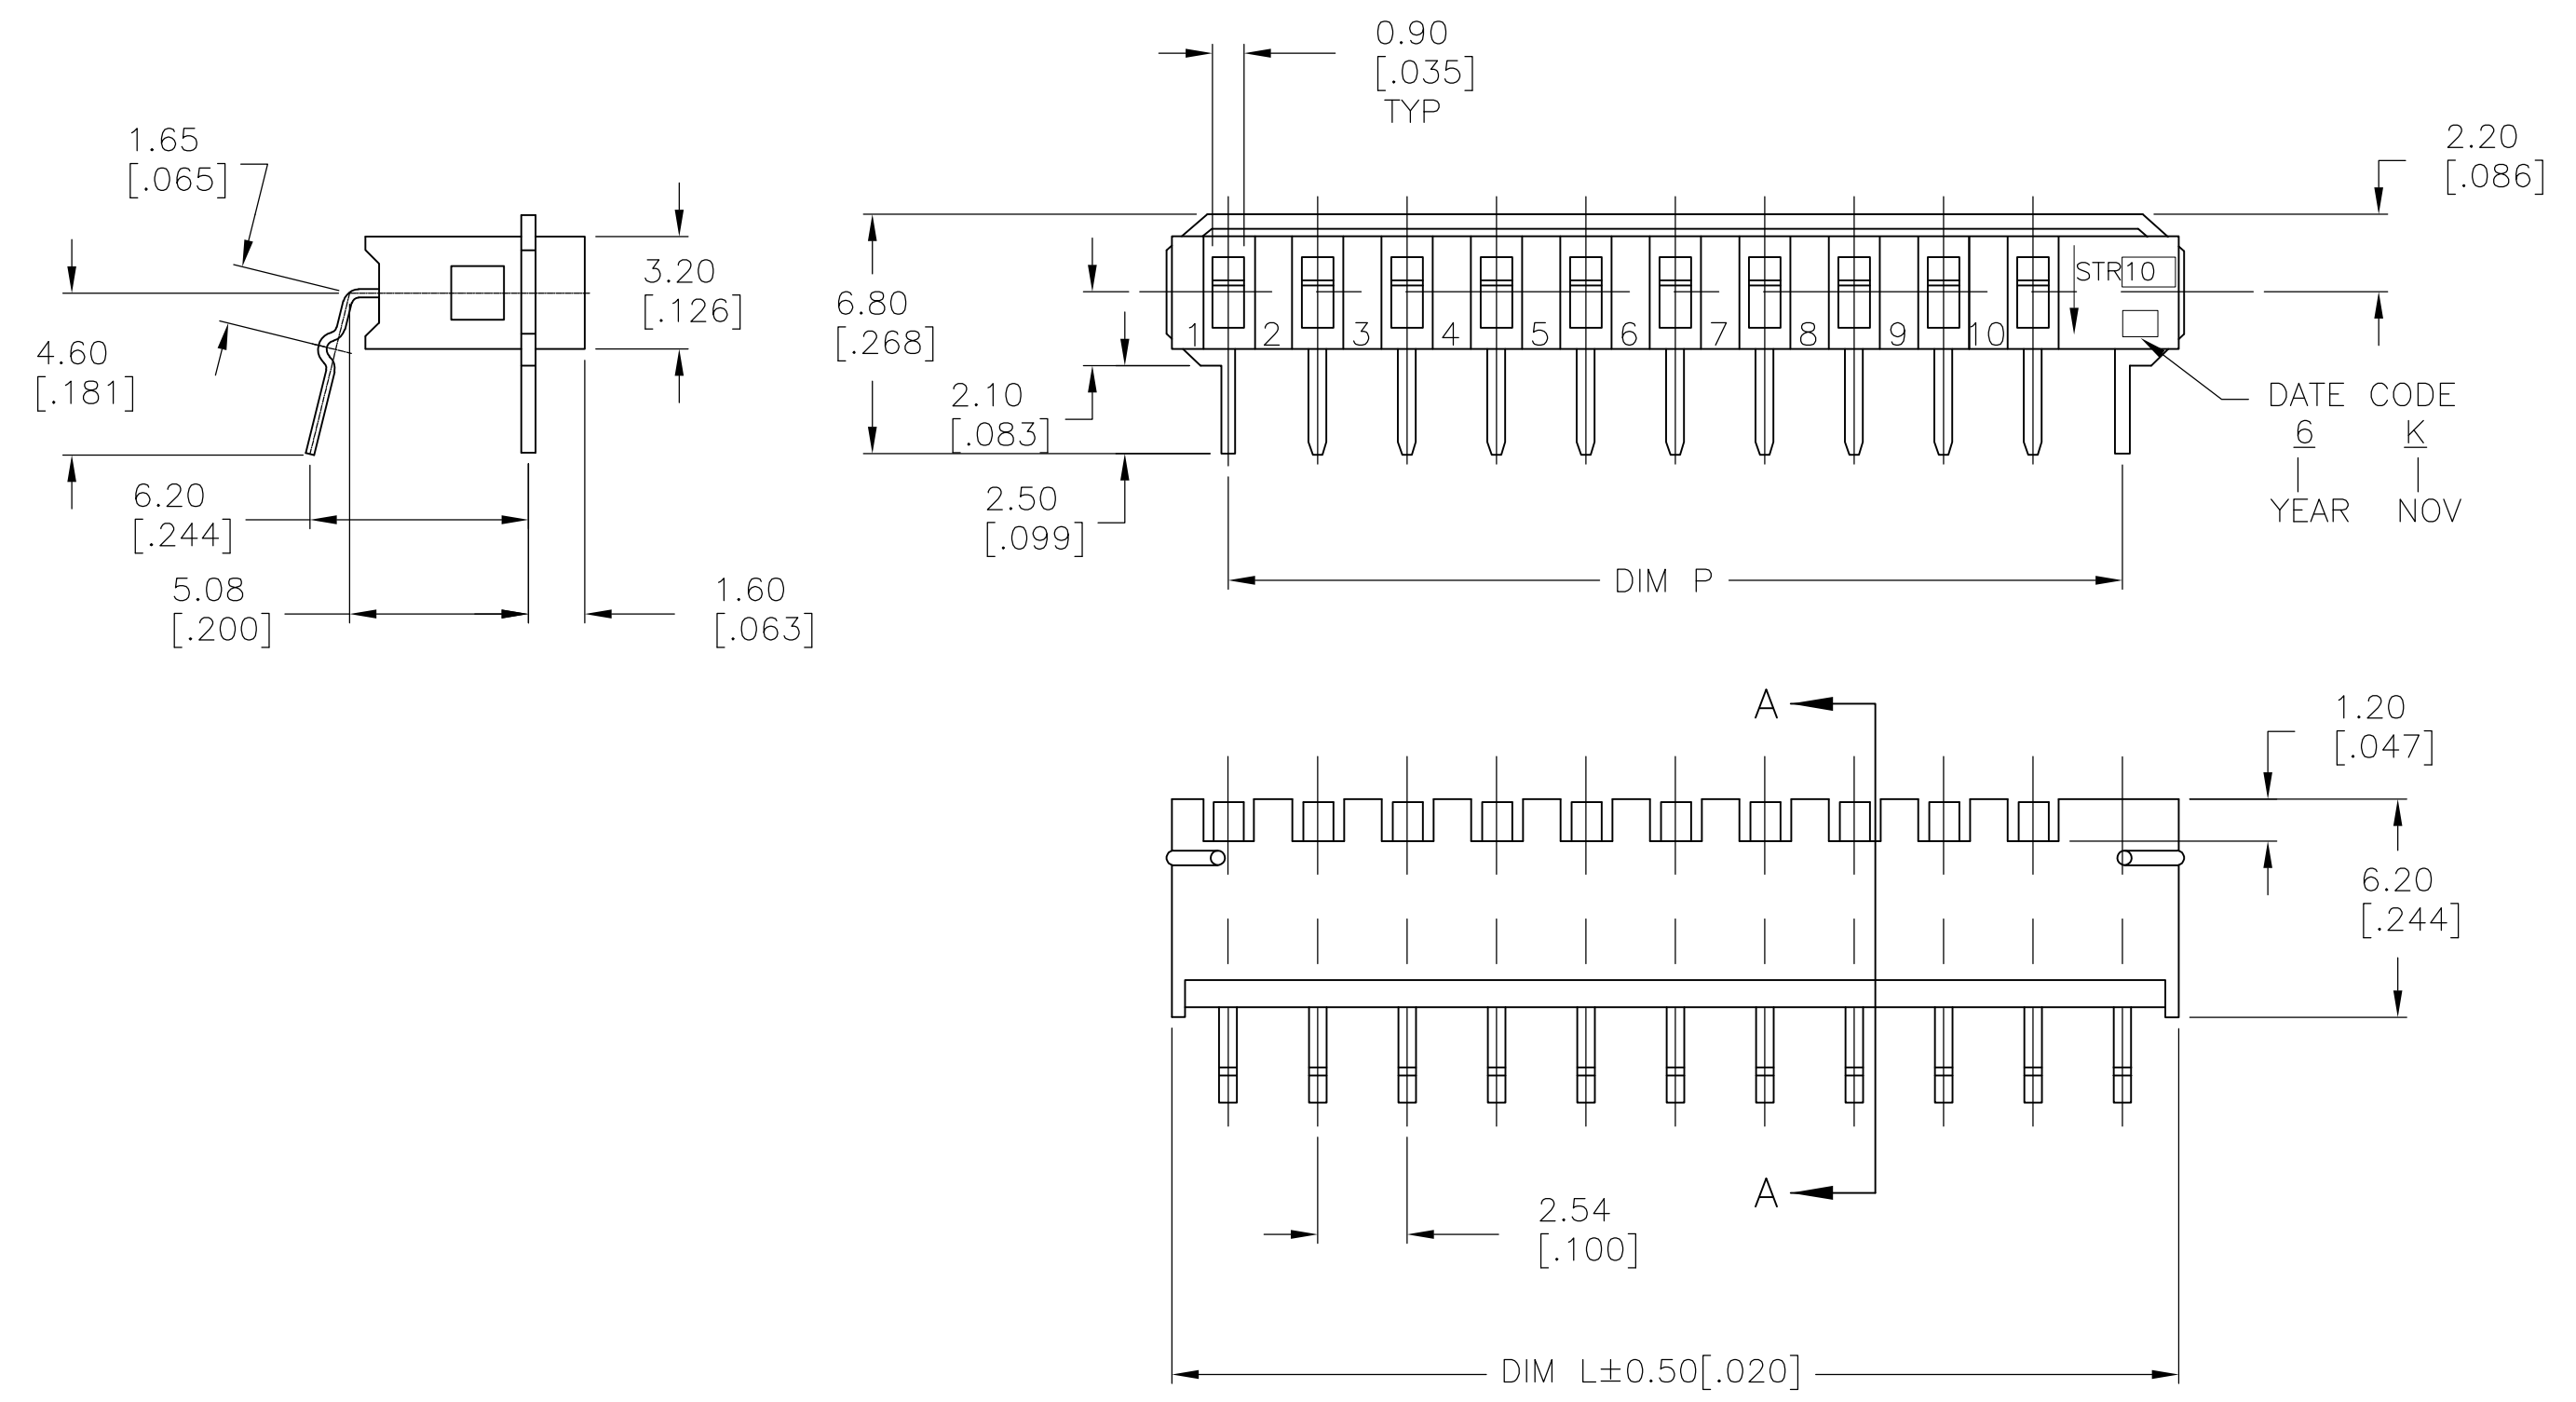

P.C.LAYOUT

- 1 ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS)
- 2 SWITCH SUPPLIED IN THE "OFF" POSITION AND SHOULD BE SOLDERED IN THE "OFF" POSITION.

OBSOLETE	25.40 (1.000)	28.60 (1.126)	STR10	1977105-5
	20.32 (.800)	23.52 (.926)	STR08	1977105-4
	15.24 (.600)	18.44 (.726)	STR06	1977105-3
	10.16 (.400)	13.36 (.526)	STR04	1977105-2
	5.08 (.200)	8.28 (.326)	STR02	1977105-1
	DIM P	DIM L	T&B P/N	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0. PLC ± - 1. PLC ± - 2. PLC ± 0.30[.012] 3. PLC ± - 4. PLC ± - ANGLES ± -	FINISH -	DIN M. BINNER 16MAY07 CHK M. SARVER 16MAY07 APP'D M. SARVER 16MAY07 PRODUCT SPEC APPLICATION SPEC SIZE A1 CAGE CODE 00779 DRAWING NO. 1977105 RESTRICTED TO
MATERIAL SEE SPECIFICATIONS			TE Connectivity SIP SWITCH (STR02 - 10 SERIES) SCALE 5:1 SHEET 1 OF 1 REV C

CUSTOMER DRAWING