


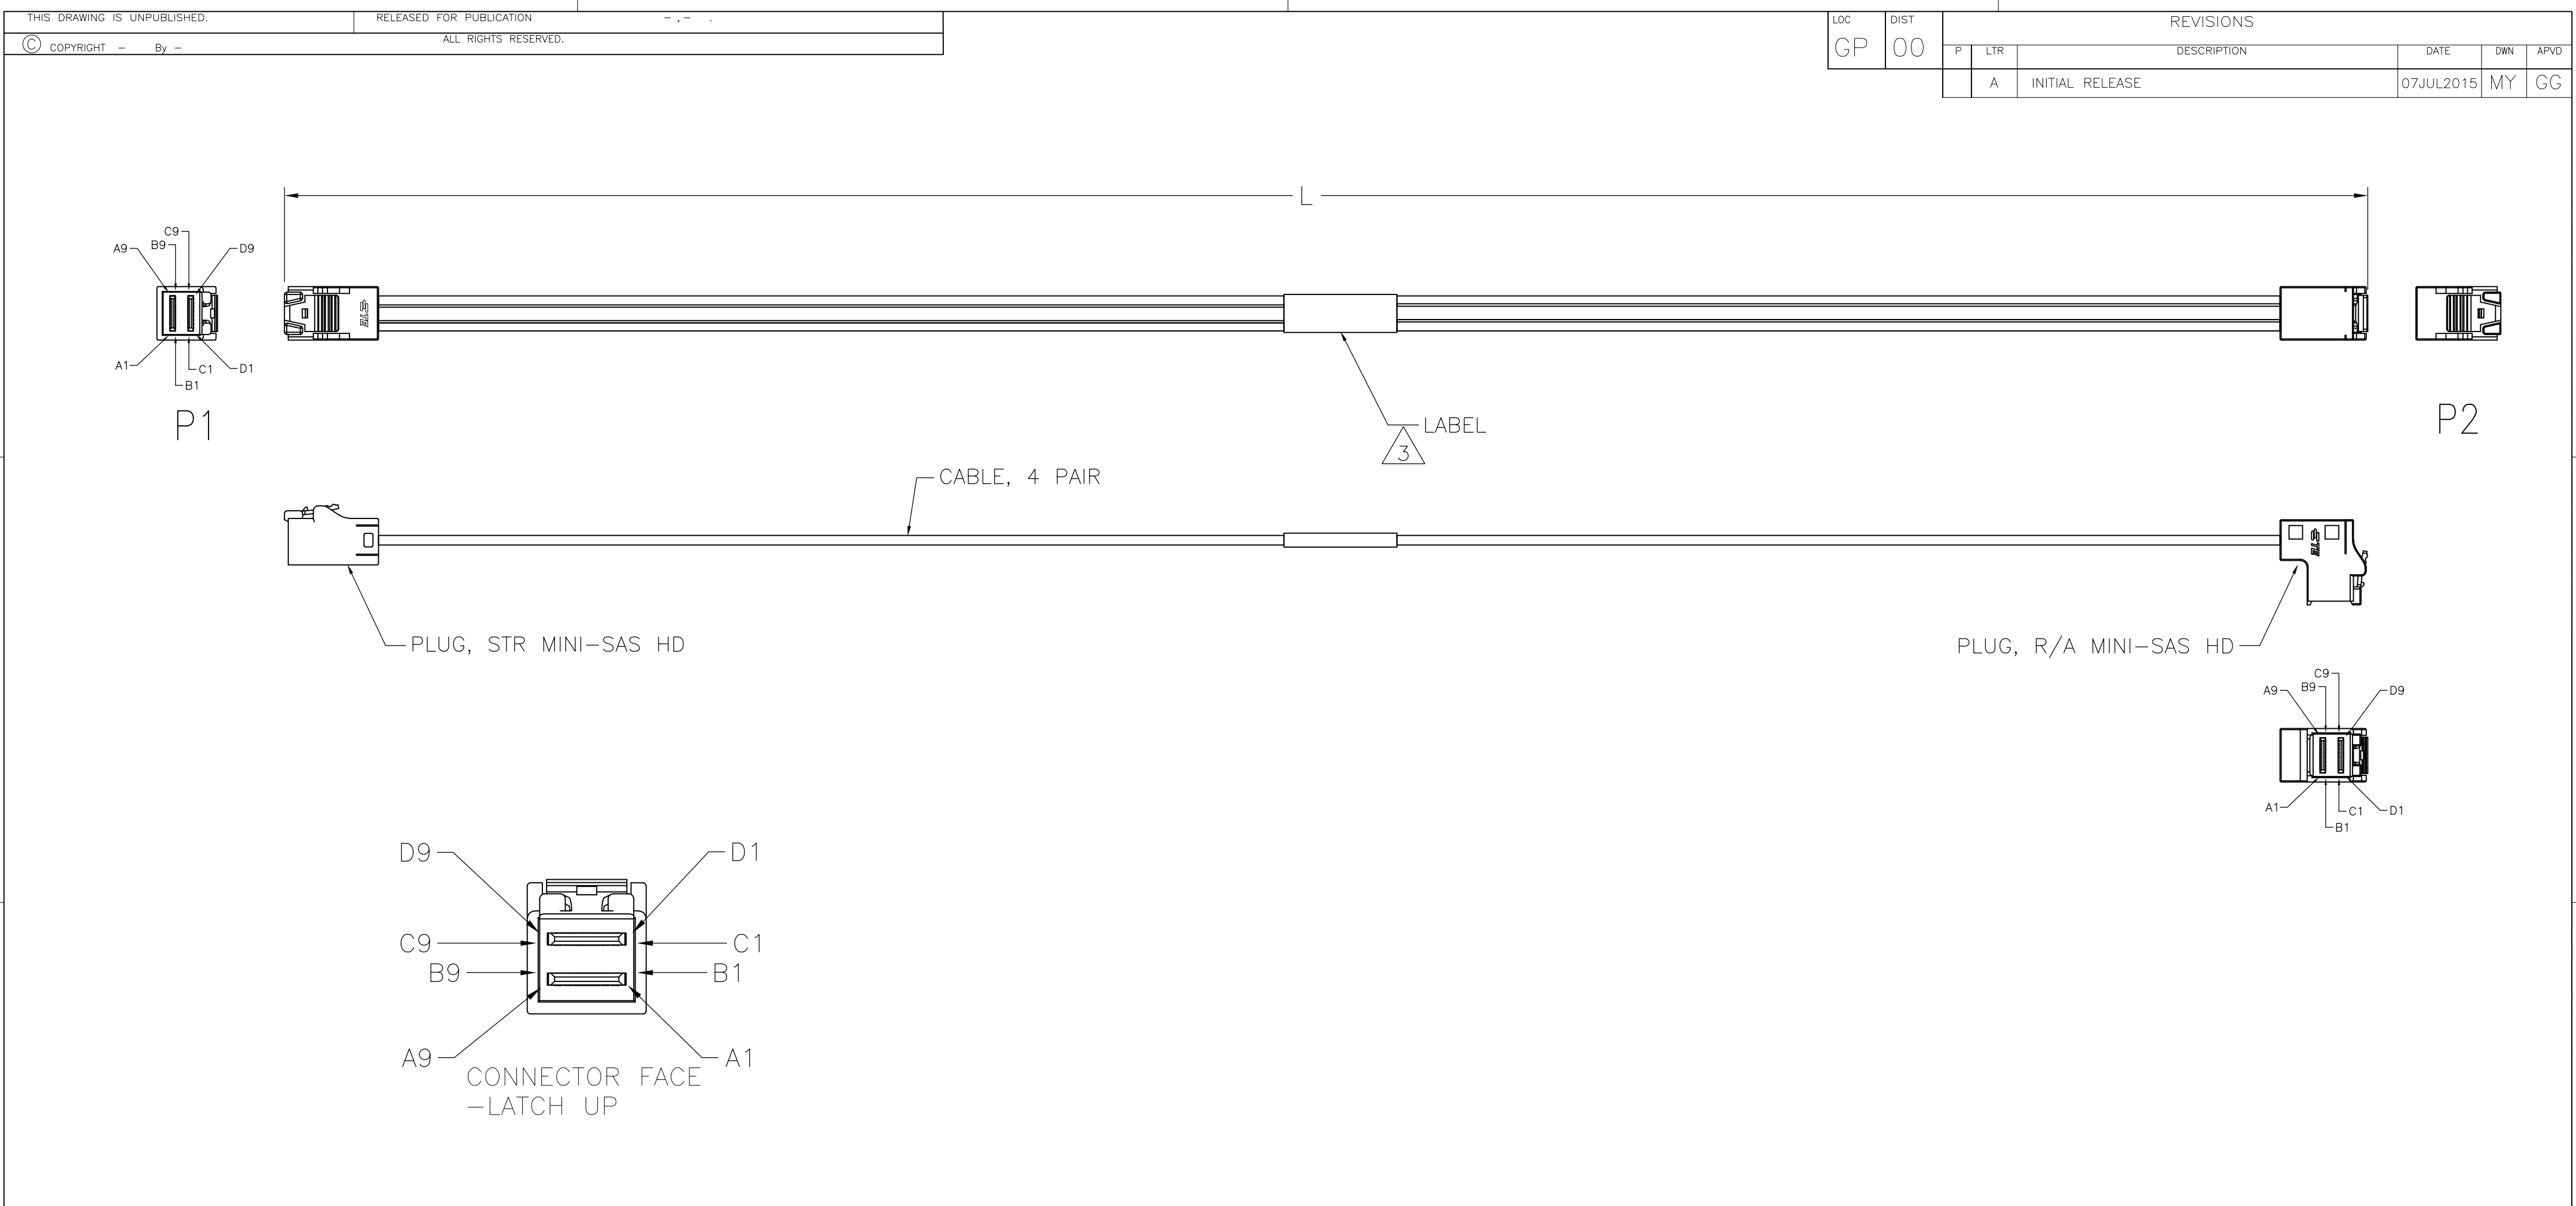

1. ASSEMBLY TO BE 100% TESTED FOR CONTINUITY, SHORTS, AND OPENS, CABLES ASSEMBLYS ARE ALSO TO BE 100% TESTED FOR SIGNAL INTEGRITY, TO SAS 3.0 REQUIREMENTS.

2. ROHS AND REACH COMPLIANCE: PRODUCT AND PROCESSING MEETS REQUIREMENTS OF TE SPECIFICATION TEC-138-702.


3 LABEL CENTERED AND LABEL INFORMATION AS BELOW:

	2820333-[]	TE LOGO AND P/N
	METERS	LENGTH
MADE IN		COUNTRY OF ORIGIN
YYWWSSSS		YYWW IS DATE CODE, SSSS IS SERIAL
		BAR FOR YYWWSSSS

4. SEE SHEET #2 FOR WIRING SCHEMATIC.

1000	$+25_{-0}$	2820333-4
700	$+25_{-0}$	2820333-3
500	$+25_{-0}$	2820333-2
300	$+25_{-0}$	2820333-1
"L"[MM]		TE P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.YI	16/JUN/2014	TE Connectivity	
DIMENSIONS: mm		CHK G.GUTGOLD	16/JUN/2014		
		APVD G.GUTGOLD	16/JUN/2014		
		NAME C/A, INTERNAL HD MINI SAS, STR TO R/A 100 OHMS, 4X, NON HALOGEN —			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± — 4 PLC ± — ANGLES ± —		PRODUCT SPEC —		SIZE	
MATERIAL —		APPLICATION SPEC —		CAGE CODE	
FINISH —		WEIGHT —		DRAWING NO	
		CUSTOMER DRAWING		RESTRICTED TO —	
				A2 00779 C=2820333	
				SCALE N.T.S.	
				SHEET 1 of 2	
				REV A	

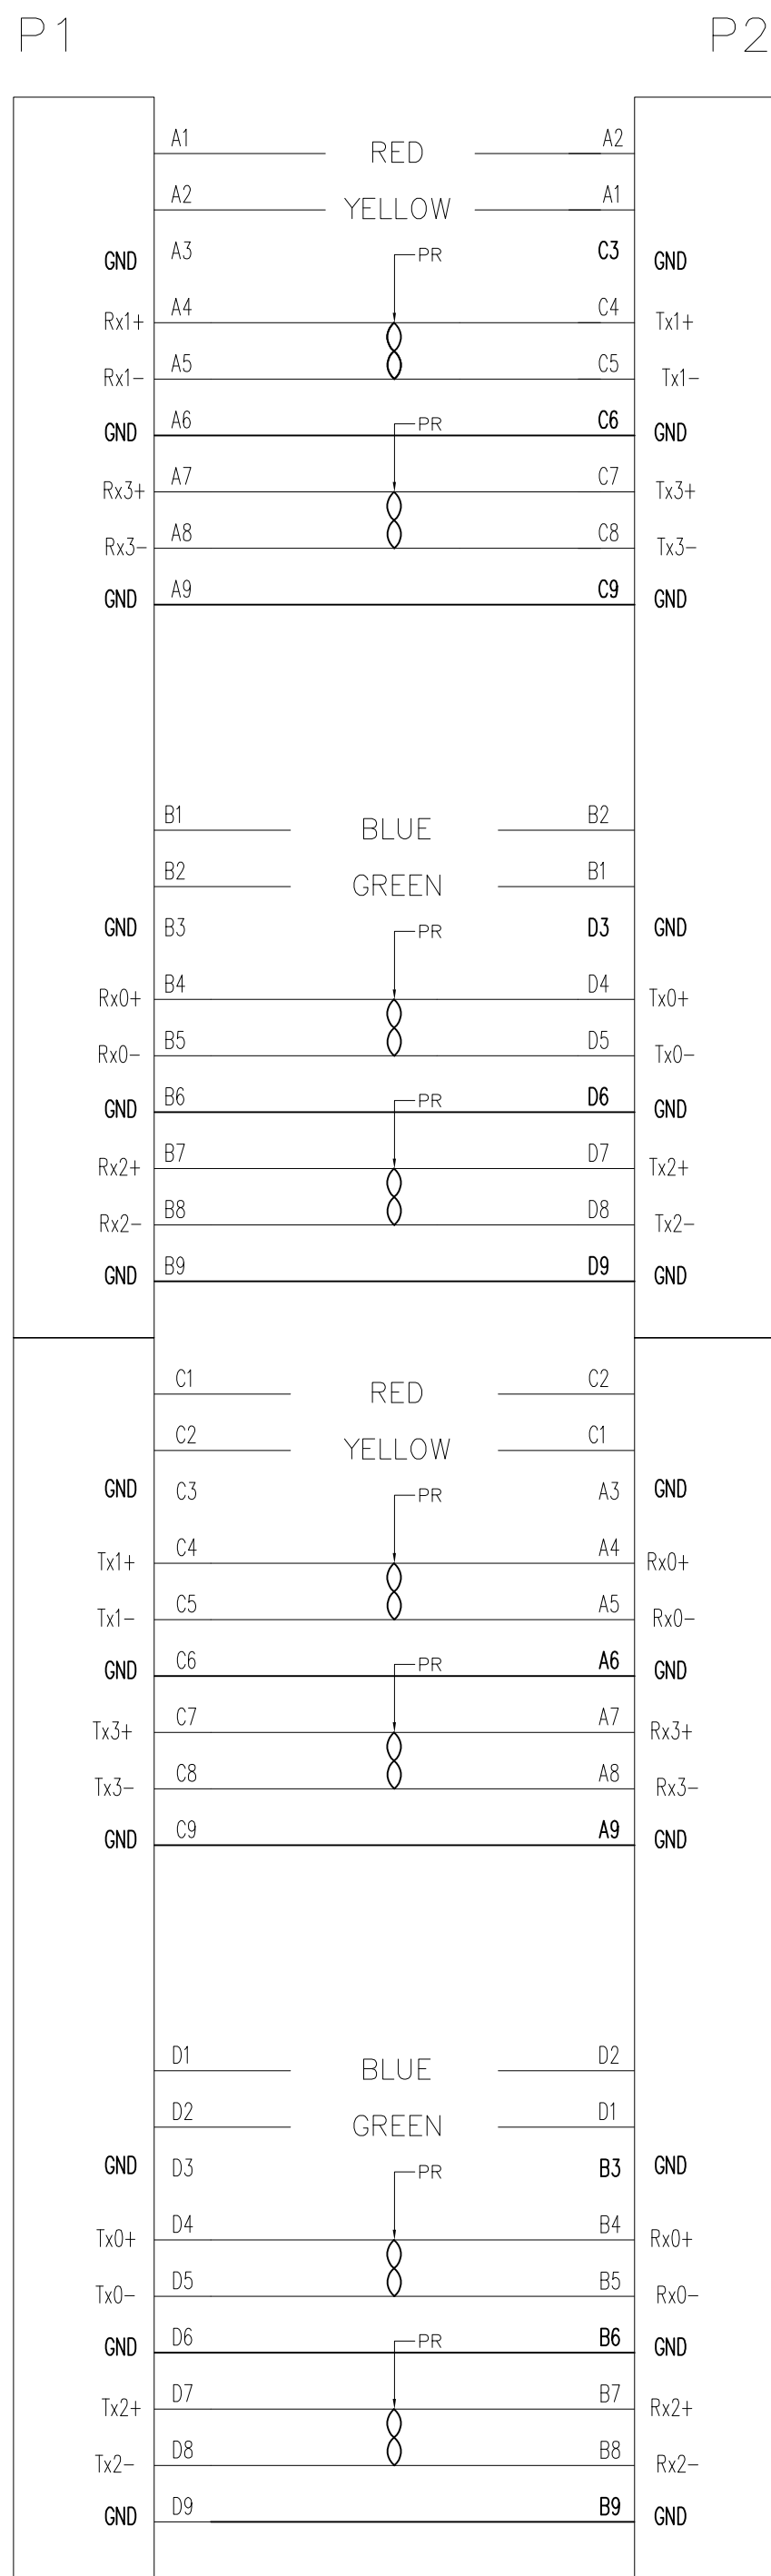

WIRING PATTERN

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.YI 16/JUN/2014 CHK G.GUTGOLD 16/JUN/2014 APVD G.GUTGOLD 16/JUN/2014 PRODUCT SPEC — APPLICATION SPEC — WEIGHT —		 TE Connectivity C/A, INTERNAL HD MINI SAS, STR TO R/A 100 OHMS, 4X, NON HALOGEN —							
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± — 4 PLC ± — ANGLES ± —		NAME							
		FINISH —		SIZE A2		CAGE CODE 00779		DRAWING NO C=2820333		RESTRICTED TO —	
MATERIAL —		CUSTOMER DRAWING		SCALE N.T.S.		SHEET 2 of 2		REV A			

2820333

B

A