


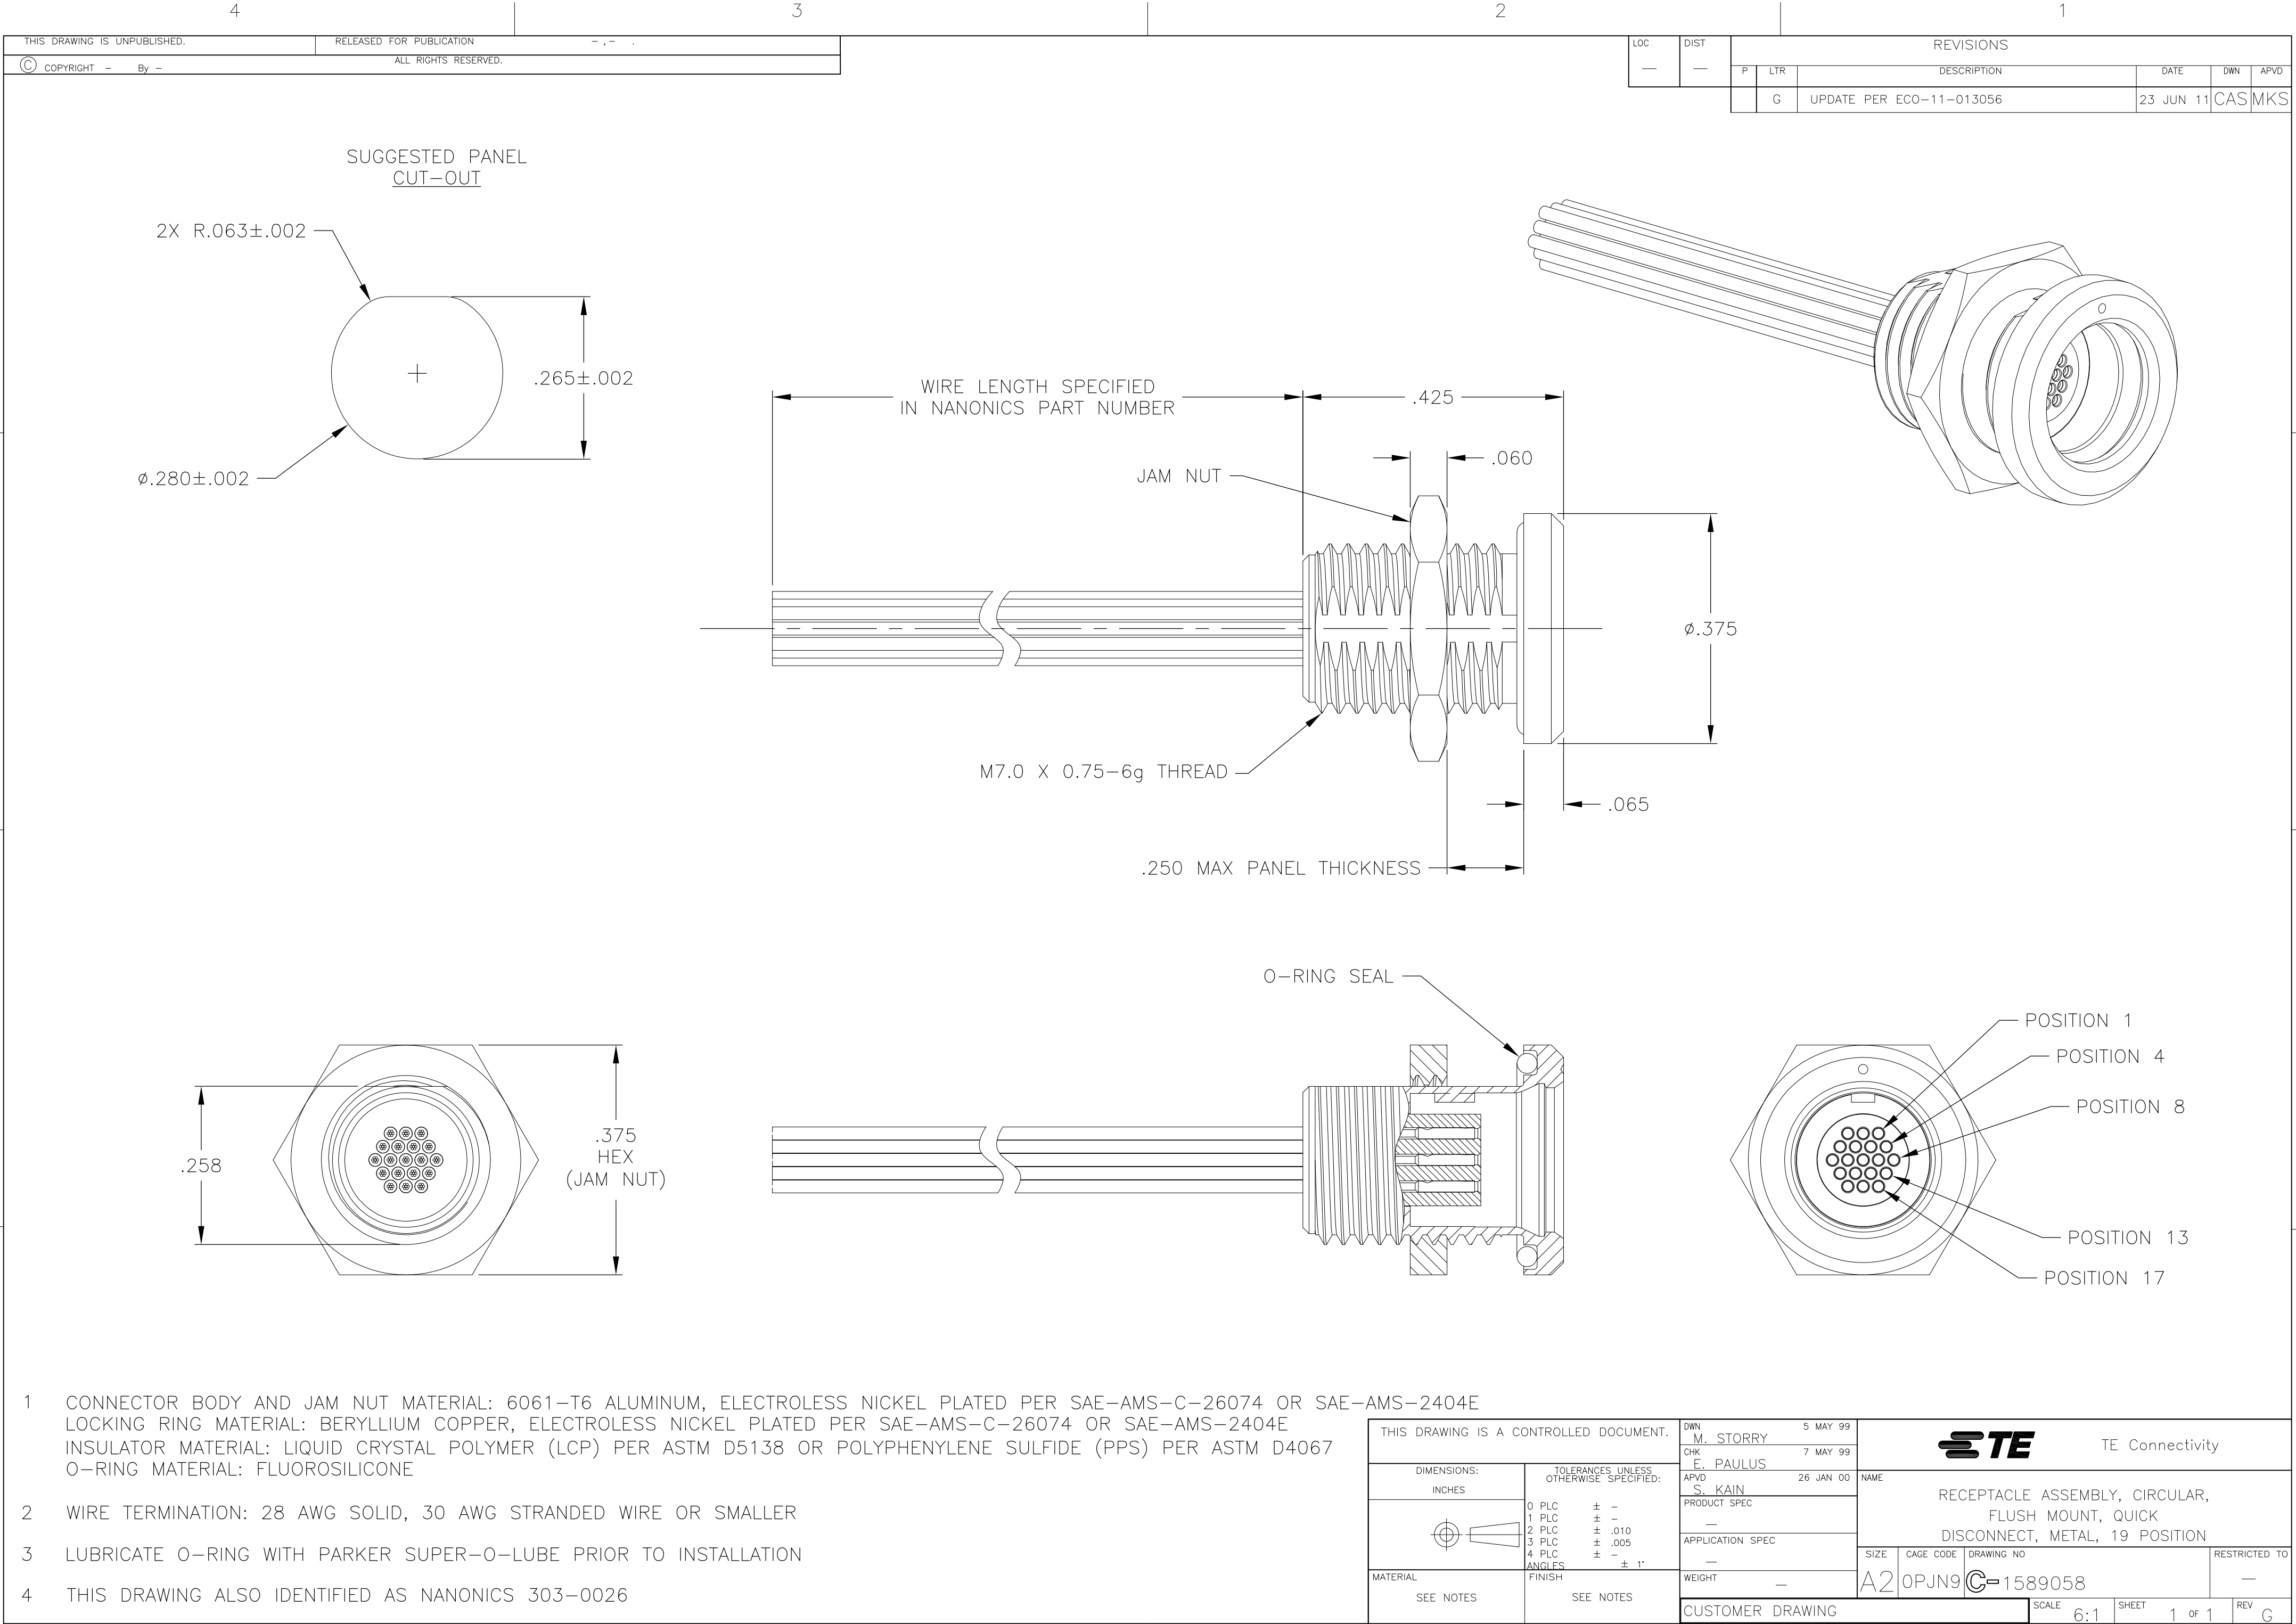

- 1 CONNECTOR BODY AND JAM NUT MATERIAL: 6061-T6 ALUMINUM, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404E
LOCKING RING MATERIAL: BERYLLIUM COPPER, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404E
INSULATOR MATERIAL: LIQUID CRYSTAL POLYMER (LCP) PER ASTM D5138 OR POLYPHENYLENE SULFIDE (PPS) PER ASTM D4067
O-RING MATERIAL: FLUOROSILICONE
- 2 WIRE TERMINATION: 28 AWG SOLID, 30 AWG STRANDED WIRE OR SMALLER
- 3 LUBRICATE O-RING WITH PARKER SUPER-O-LUBE PRIOR TO INSTALLATION
- 4 THIS DRAWING ALSO IDENTIFIED AS NANONICS 303-0026

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. STORRY 5 MAY 99		 TE Connectivity				
		CHK E. PAULUS 7 MAY 99						
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. KAIN 26 JAN 00		NAME		
	0 PLC ± -		PRODUCT SPEC		RECEPTACLE ASSEMBLY, CIRCULAR, FLUSH MOUNT, QUICK DISCONNECT, METAL, 19 POSITION			
	1 PLC ± -		—					
	2 PLC ± .010		APPLICATION SPEC					
	3 PLC ± .005		—					
	4 PLC ± -		—					
ANGLES ± 1°		FINISH		WEIGHT -		SIZE A2		
MATERIAL		SEE NOTES		CUSTOMER DRAWING		CAGE CODE 0PJN9		
SEE NOTES		SEE NOTES		DRAWING NO C=1589058		RESTRICTED TO —		
				SCALE 6:1		SHEET 1 of 1		
				REV G				