
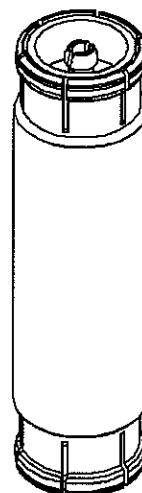


MALE-MALE ADAPTER SLIDE-SNAP TYPE
BOARD TO BOARD 14MM**R223.703.040**

Series : MMBX


COPIE

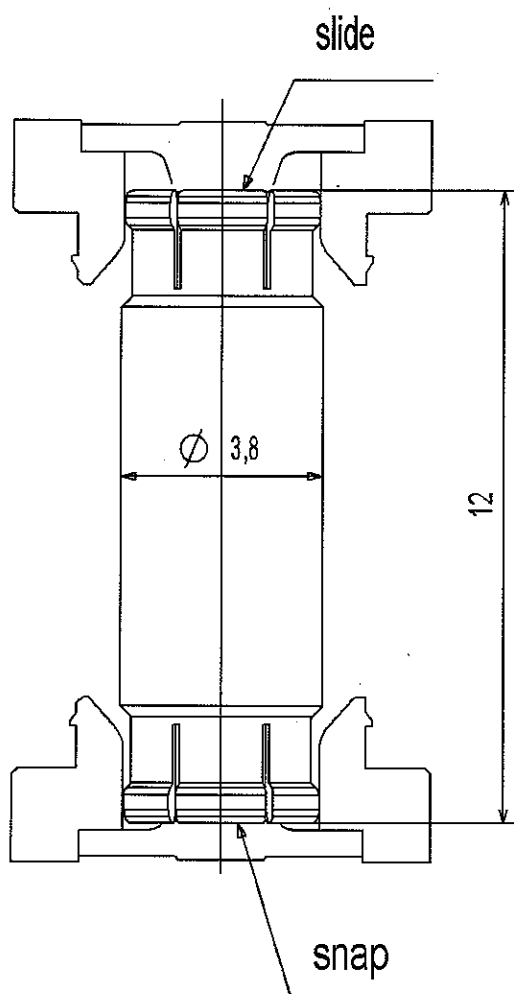

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (µm)
BODY	BRONZE	NPGR
CENTER CONTACT	BERYLLIUM COPPER	NPGR
OUTER CONTACT		
INSULATOR	PTFE	
GASKET		
OTHERS PARTS		
-	-	-
-	-	-



Issue : 0906 C

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIAL 

MALE-MALE ADAPTER SLIDE-SNAP TYPE
BOARD TO BOARD 14MM

R223.703.040

Series : MMBX

PACKAGING

Standard	Unit	Other
100	'W' option	Contact us

SPECIFICATION**COPIE****ELECTRICAL CHARACTERISTICS**

Impedance	50	Ω
Frequency	0-12.4	GHz
VSWR	1.25* + 0.0000	x F(GHz) Maxi
Insertion loss	0.05	$\sqrt{F}$ (GHz) dB Maxi
RF leakage	- (100**	- F(GHz)) dB Maxi
Voltage rating	330	Veff Maxi
Dielectric withstanding voltage	500	Veff mini
Insulation resistance	1000	M Ω mini

ENVIRONMENTAL

Operating temperature	-55/+155	$^{\circ}$ C
Hermetic seal	NA	Atm.cm3/s
Panel leakage	NA	

OTHER CHARACTERISTICS

Assembly instruction

Others :

* to 6 GHz

** Interface MMBX only up to 2.5 GHz

PCB to PCB is -50 dB up to 2.5 GHz

MECHANICAL CHARACTERISTICS

Center contact retention	
Axial force – Mating end	10 N mini
Axial force – Opposite end	10 N mini
Torque	NA N.cm mini

Recommended torque	
Mating	NA N.cm
Panel nut	NA N.cm

Mating life	100 Cycles mini
Weight	0.4870 g

Issue : 0906 C

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIAL 