
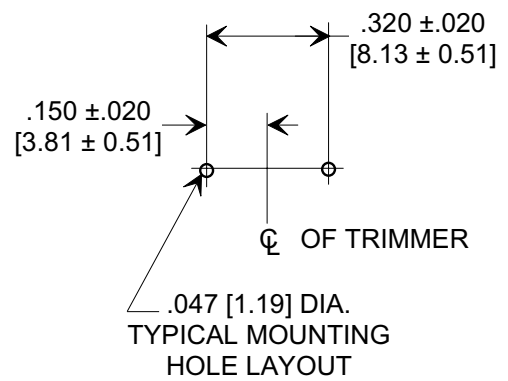
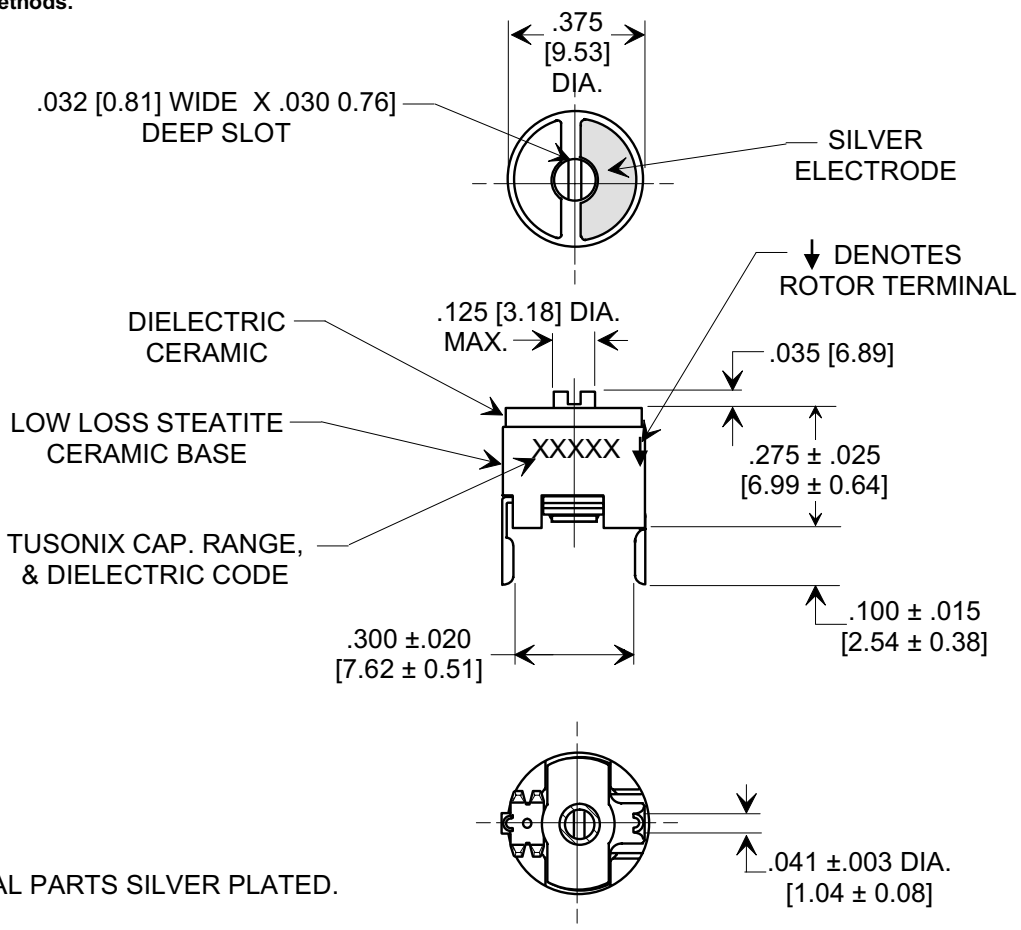



MARKETING SALES DRAWING

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

Electrical Testing
 per Tusonix standard
 test plans and Mil-Std-202
 Test Methods.



NOTE:
 ALL METAL PARTS SILVER PLATED.

FOR DIMENSIONS ≤ .125"/3.18mm,
 TOLERANCE IS ±.015"/0.38mm.
 FOR DIMENSIONS ≥ .126"/3.20mm,
 TOLERANCE IS ±.030"/0.76mm.

ORDERING INFORMATION

Part No.	538-011 B 7.0 - 25
Capacitance	7.0 - 25 pF
Capacitance Tol.	MIN . + 10%, MAX. -10%, +100%
Dielectric Type Code	B
Voltage Rating	350 VDC TO + 85°C, 200VDC TO +125°C
Operating Temperature Range:	-55°C TO + 125°C
To Tusonix Spec Unless Stated Otherwise	

X-2015 Rev-0

REVISION RECORD	0
Original Release	C.O. 200001105-7-01
METRIC DIMS & ORIENTATION SYMBOL CIRCUIT & NOTES	ADDED L.E. 06-03-03
	1
	20030530-1-01

TOLERANCES unless otherwise specified	Title	CERAMIC TRIMMER
2 PLC. DECIMAL ±		
3 PLC. DECIMAL ±	Drawn L.E. 01-07-00	
ANGLES ± 10°	Approved H.R. 01-07-00	
TUSONIX TUCSON, ARIZONA	A	538-011 B 7.0 - 25

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Tusonix:](#)

[0538-011-B-7.0-25LF](#)