


LOC	DIST	REVISIONS				
HB	—	P	LTR	DESCRIPTION	DATE	DWN
						APVD

RELAY TYPE


3-1721130-2	OMI-SH-148L1	48V	OMI-SH-148L1	af	2-1721130-4	OMI-SH-109L1	9V	OMI-SH-109L1	x	1-1721130-2	OMI-SS-118L1	18V	OMI-SS-118L1	l
3-1721130-1	OMI-SH-148D1	48V	OMI-SH-148D1	ae	2-1721130-3	OMI-SH-109D1	9V	OMI-SH-109D1	w	1-1721130-1	OMI-SS-118D1	18V	OMI-SS-118D1	k
3-1721130-0	OMI-SH-124L1	24V	OMI-SH-124L1	ad	2-1721130-2	OMI-SH-106L1	6V	OMI-SH-106L1	v	1-1721130-0	OMI-SS-112L1	12V	OMI-SS-112L1	j
2-1721130-9	OMI-SH-124D1	24V	OMI-SH-124D1	ac	2-1721130-1	OMI-SH-106D1	6V	OMI-SH-106D1	u	1721130-9	OMI-SS-112D1	12V	OMI-SS-112D1	i
2-1721130-8	OMI-SH-118L1	18V	OMI-SH-118L1	ab	2-1721130-0	OMI-SH-105L1	5V	OMI-SH-105L1	t	1721130-8	OMI-SS-109L1	9V	OMI-SS-109L1	h
2-1721130-7	OMI-SH-118D1	18V	OMI-SH-118D1	aa	1-1721130-9	OMI-SH-105D1	5V	OMI-SH-105D1	s	1721130-7	OMI-SS-109D1	9V	OMI-SS-109D1	g
2-1721130-6	OMI-SH-112L1	12V	OMI-SH-112L1	z	1-1721130-8	OMI-SH-103L1	3V	OMI-SH-103L1	r	1721130-6	OMI-SS-106L1	6V	OMI-SS-106L1	f
2-1721130-5	OMI-SH-112D1	12V	OMI-SH-112D1	y	1-1721130-7	OMI-SH-103D1	3V	OMI-SH-103D1	q	1721130-5	OMI-SS-106D1	6V	OMI-SS-106D1	e
TE PART NO	EC TYPE NAME	PART B	PART A	ITEM	1-1721130-6	OMI-SS-148L1	48V	OMI-SS-148L1	p	1721130-4	OMI-SS-105L1	5V	OMI-SS-105L1	d
					1-1721130-5	OMI-SS-148D1	48V	OMI-SS-148D1	o	1721130-3	OMI-SS-105D1	5V	OMI-SS-105D1	c
					1-1721130-4	OMI-SS-124L1	24V	OMI-SS-124L1	n	1721130-2	OMI-SS-103L1	3V	OMI-SS-103L1	b
					1-1721130-3	OMI-SS-124D1	24V	OMI-SS-124D1	m	1721130-1	OMI-SS-103D1	3V	OMI-SS-103D1	a

		UV RESIN	UV SEAL	18
		EPOXY RESIN	SEAL	17
UL94 V-0		PBT	CASE	16
		—	TAPE	15
CLASS E		UEW	MAGNETIC WIRE	14
UL94 V-0		PET	BASE	13
UL94 V-0		PBT	BOBBIN	12
	SOLDER DIP	CP WIRE	COIL TERMINAL	11
UL94 V-0		PPS	CARD	10
		Ag ALLOY	MOVABLE CONTACT	9
		Ag ALLOY	STATIONARY CONTACT	8
		Cu ALLOY	HINGE SPRING	7
	SOLDER DIP	Cu ALLOY	B TERMINAL	6
	SOLDER DIP	Cu ALLOY	M TERMINAL	5
	SOLDER DIP	Cu ALLOY	MOVABLE SPRING	4
		STEEL	CORE	3
		STEEL	ARMATURE	2
		STEEL	YOKE	1
INCOMBUSTIBILITY	TREATMENT	MATERIAL	DESCRIPTION	ITEM

CONNECTION DIAGRAM
(BOTTOM VIEW)



DRILLING DIAGRAM(2/1)
(BOTTOM VIEW)

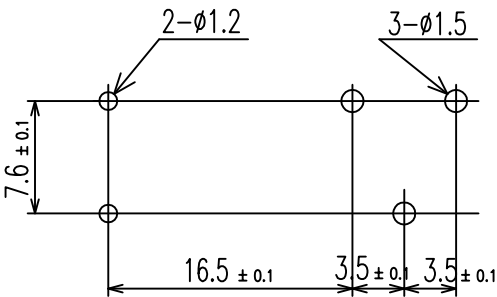

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL
—

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± —
1 PLC ± —
2 PLC ± —
3 PLC ± —
4 PLC ± —
ANGLES ± —
FINISH —

DWN
H.SASAKI
CHK
Y.OIKAWA
APVD
A.NAGAI
PRODUCT SPEC
APPLICATION SPEC
WEIGHT
—
CUSTOMER DRAWING

TE Connectivity

OMI CUSTOMER DRAWING

SIZE
A3
CAGE CODE
00779
DRAWING NO
C=1721130
RESTRICTED TO
—

SCALE
4:1
SHEET
2 of 2
REV
D