


REV. 7  
DCO 63333

COIL: @ 25°C	
RESISTANCE	100 OHMS ±10%
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	6.5 VDC
MUST RELEASE	10.1 VDC MAX, 0.92 VDC MIN

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 15 g's
SHOCK	100 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: (LEVEL L ACCEPTANCE TESTING ONLY)  
OPERATE & RELEASE 7 MS MAX.  
(INCLUDING BOUNCE)

CUSTOMER DATA SHEET

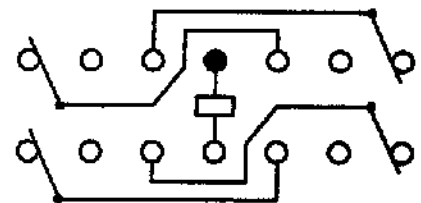

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO  
2 AMP 28 VDC RESISTIVE

DR. R.B. 10/16/90

CKT/G 10-24-00

**IllCII Technologies**  
advanced control electronic solutions

CUST. OPL  
CUST. NO. M39016/40-010 REV.       

"SR" RELAY

SR-7610