

**NOTES:**  
 1. ROHS COMPLIANT  
 2. MATERIAL:

PANEL CONNECTOR SOCKET - POLYESTER, UL RATING 94-V0  
 HEADER CONNECTOR - POLYESTER, UL RATING 94-V0  
 LENS - POLYCARBONATE, UL RATING 94-V2  
 MOISTURE SEAL - EPDM  
 LOCKWASHER - STEEL, NICKEL PLATE  
 TERMINALS - PHOSPHOR BRONZE, TIN PLATE  
 WIRE - 24 AWG 1007/1569

3. MOUNTING: HOLE SIZE - 5/16" (8mm) OPENING ON 1/2" CENTERS  
 4. PANEL THICKNESS: .031" (.787mm) MIN - .125" (3.175mm) MAX  
 5. LED LEAD LENGTH:  
 FOR BI-LEADS - .250" ± 0.01" (6.35mm ± 0.254)  
 FOR TRI-LEADS - CONTACT FACTORY  
 6. FOR STANDARD DRY APPLICATIONS USE CMC 441 OR CMC 443 LENS; FOR DUST AND WET  
 CONDITIONS USE CMS 442 OR CMS 444 LENS (EXCEEDS NEMA 6P/IP 67)  
 7. U.S. & FOREIGN PATENT ISSUED


REVISIONS					
ECN #	REV.	DESCRIPTION	DATE	INITIALS	CHK'D
	001	REVISED PER ECR 111009AZ01	11/26/10	KH	DPZ

**CABLE ORDERING CODE EXAMPLE:  
 CNX 440 E02 4 1 12**


TERMINATION *		WIRE SIZE *		WIRE COLOR *		WIRE LENGTH *	
X =	STRIPPED END	4	24 AWG	1	WHITE - BLACK	04	4 INCHES (101.6mm)
E =	SINGLE ROW LOCKING HEADER			2	RED - BLACK	06	6 INCHES (152.4mm)
D =	DUAL ROW LOCKING HEADER			6	WHITE - BLACK - RED	08	8 INCHES (203.2mm)
02 =	2 WIRES			0	WHITE - BLACK - RED - GREEN	12	12 INCHES (304.8mm)
03 =	3 WIRES					18	18 INCHES (457.2mm)
04 =	4 WIRES					24	24 INCHES (609.6mm)

\*CALL FACTORY  
 FOR ADDITIONAL  
 OPTIONS

LEDS  
 (ORDER SEPARATELY)



5MM BI-LEAD




5MM TRI-LEAD


LENS  
 (ORDER SEPARATELY)



CMC 441  
 CMC 443



CMS 442  
 CMS 444

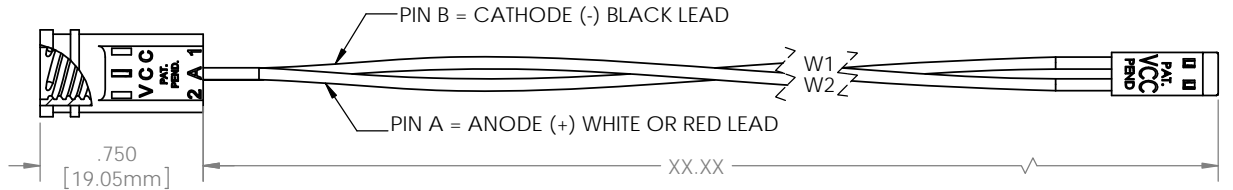

DIMENSION STYLE: INCHES / MM GENERAL TOLERANCES UNLESS OTHERWISE SPECIFIED:	APPROVAL	DATE
	DRAWN KHOWARD	11/26/10
INCHES ± .500 MM ± 12.7	CHECKED DPZ	11/29/10
 THIRD ANGLE PROJECTION PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VISUAL COMMUNICATIONS COMPANY, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF VISUAL COMMUNICATIONS COMPANY, INC IS PROHIBITED.	MATERIAL	SEE NOTES
	FINISH	SEE NOTES
DO NOT SCALE DRAWING		

 12780 DANIELSON CT, SUITE A, POWAY, CA 92064 U.S.A PHONE: (800) 522-5546 EMAIL: vccsales@vccite.com		
TITLE: ASSEMBLY, CNX 440 CABLE		
SIZE	DWG. NO.	001
B	CNX 440 ASSY	
SCALE: 1.75:1		SHEET 1 OF 1