


| DASH NO | MODEL NO | Ω |
|---------|----------|----|
| -1 | BJ228 | 50 |
| -2 | UBJ228 | 75 |

DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO TROMPETER ELECTRONICS INC. AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PROCUREMENT OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION.




REVISIONS

| REV | DESCRIPTIONS | DATE | APPROVED |
|-----|-----------------------|--------|----------|
| C | REVISED PER ECO 14093 | 6-6-01 | MM. |

RED INDICATES ORIGINAL



SCALE 1/1

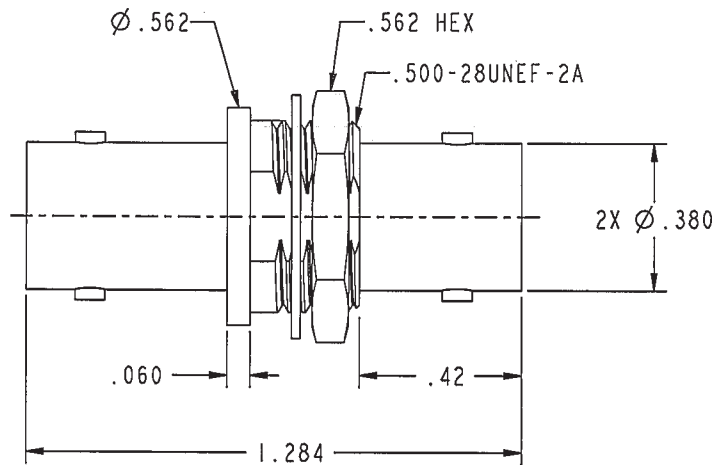


RECOMMENDED PANEL CUTOUT
SCALE 1/1

3. SOCKET CONTACT COAXIAL BNC TYPE INSULATED FEED THRU BULKHEAD JACK, 50 AND 75 OHM VERSIONS

2. MAX PANEL THICKNESS: .156

1. FINISH: TFS-1Y (NICKEL)

NOTES: UNLESS OTHERWISE SPECIFIED.

| | | | | | | | | | |
|--|-----|--|------------------|---|-----------|-------------|------------------------|-------|----|
| INTERPRET DRAWING PER MIL-STD-100. DIMENSIONS ARE IN INCHES AND INCLUDE FINISH THICKNESS UNLESS OTHERWISE SPECIFIED. | | TOL: UNLESS SPECIFIED. .XX ± .02 .XXX ± .010 ANGLE ± 1° | |  <p>TROMPETER RF connectivity <small>a cinch connectivity solutions brand</small></p> | | | | | |
| DRN | JCM | 6-5-01 | MATERIAL: | | | | TITLE: BJ228/UBJ228 | | |
| CHK | MM. | 6/5/01 | FINISH: | SIZE | CAGE CODE | DRAWING NO. | REV. | | |
| APPROVED | MM. | 6/5/01 | | A | 14949 | 105-2057 | C | | |
| NEXT ASSY | | PROVE FILE NO. 105-2057 | DO NOT SCALE DWG | SCALE | 2/1 | DATE | 6/13/00 | SHEET | IC |