

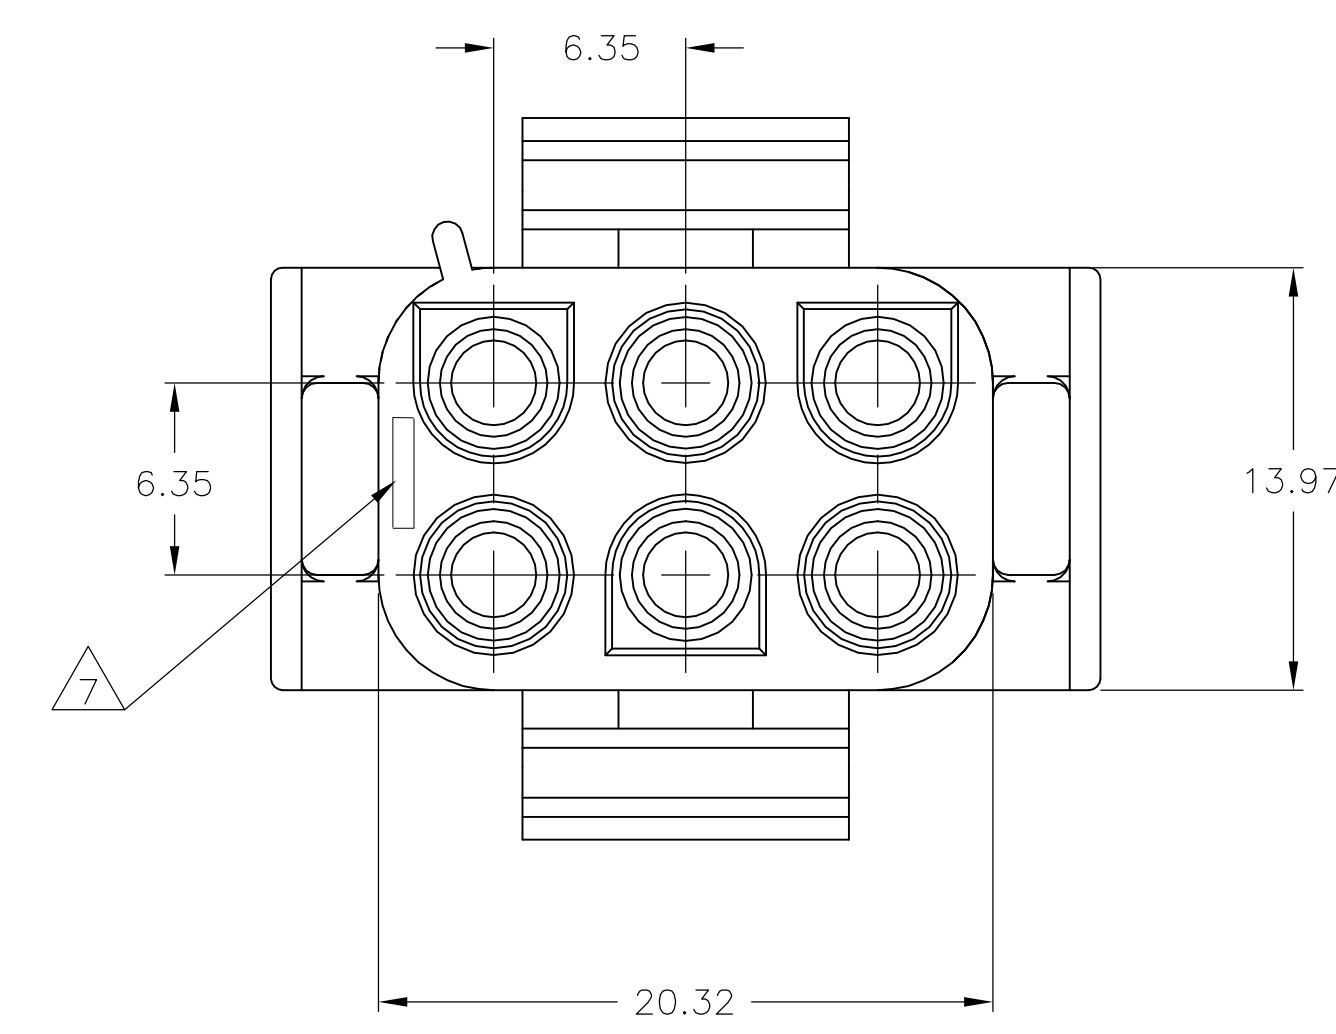
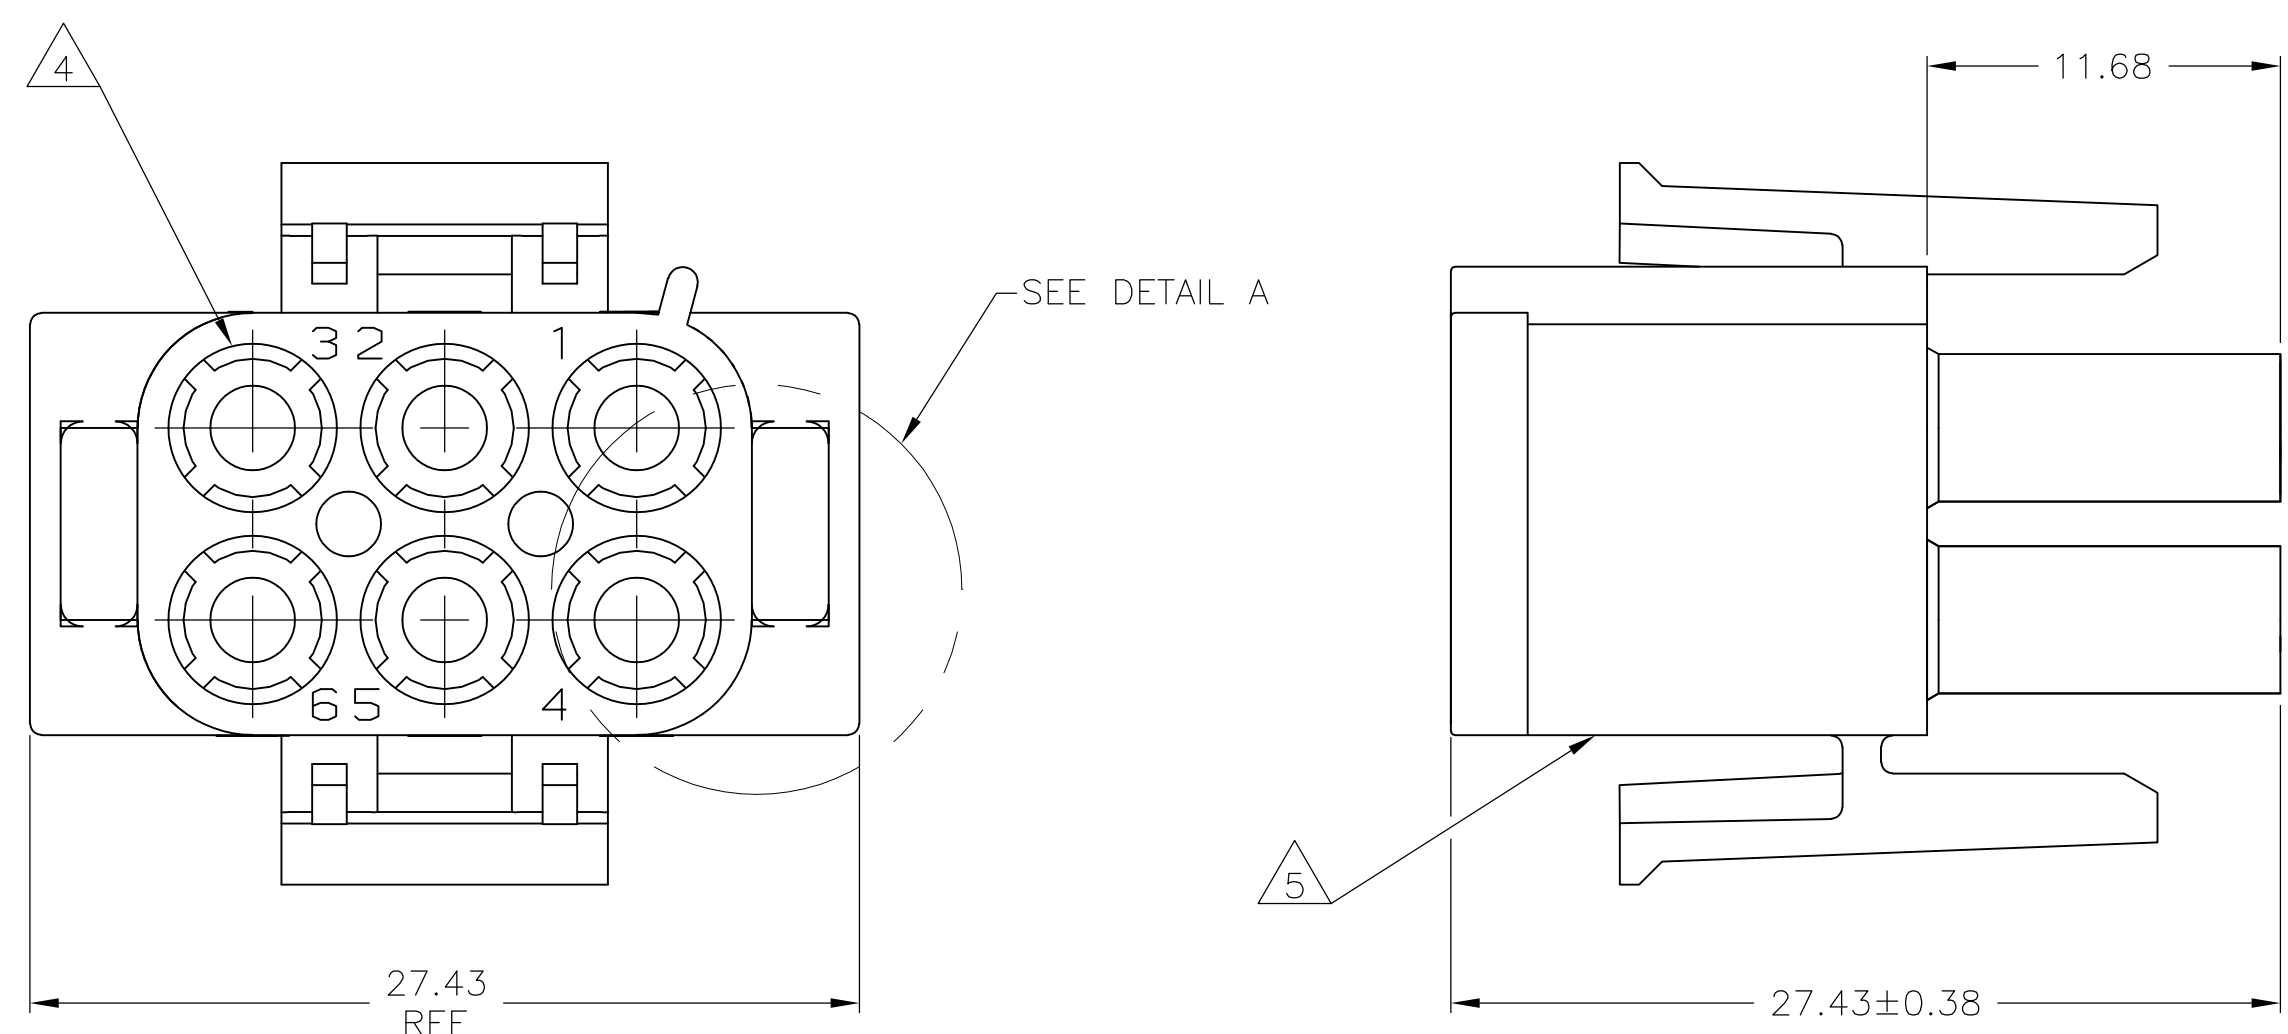


D

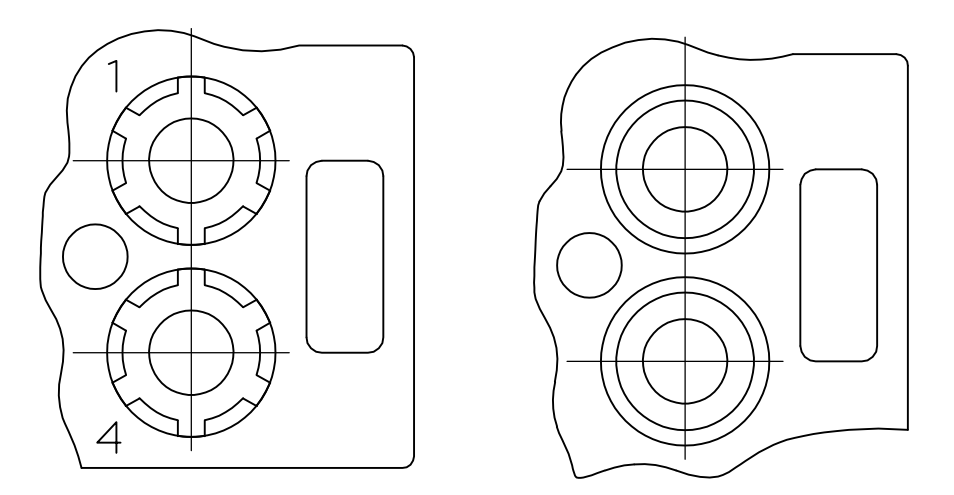


1. MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ CAP OR HEADER.
2. SMALL NICKS ARE PERMITTED ON THE CIRCUIT TOWERS WHICH COULD INCREASE THE INITIAL HOUSING MATING FORCE BY UP TO 4.4 NEWTONS [1.0 LBS]. NO INDIVIDUAL NICKED TOWER SHALL INCREASE THIS FORCE BY OVER 2.2 NEWTONS [.5 LBS].
3. DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED, CONDITION. ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.
4. FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. NO RIBS OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.
5. UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.
6. MANUFACTURING LOCATION ID ON SIDE OF HOUSING (OPTIONAL).
7. TRADEMARK LOCATION (AMP OR TE CONNECTIVITY).
8. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

C

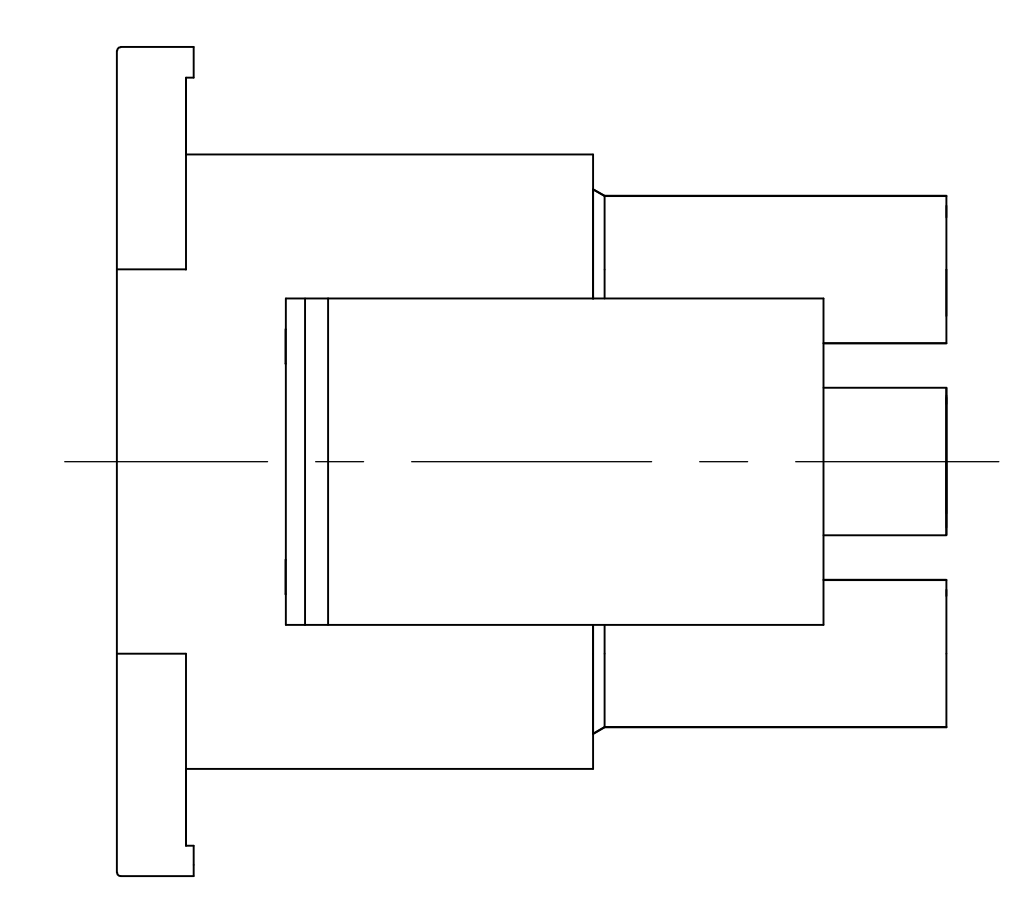

DETAIL A
OPTIONAL CONSTRUCTIONS

B

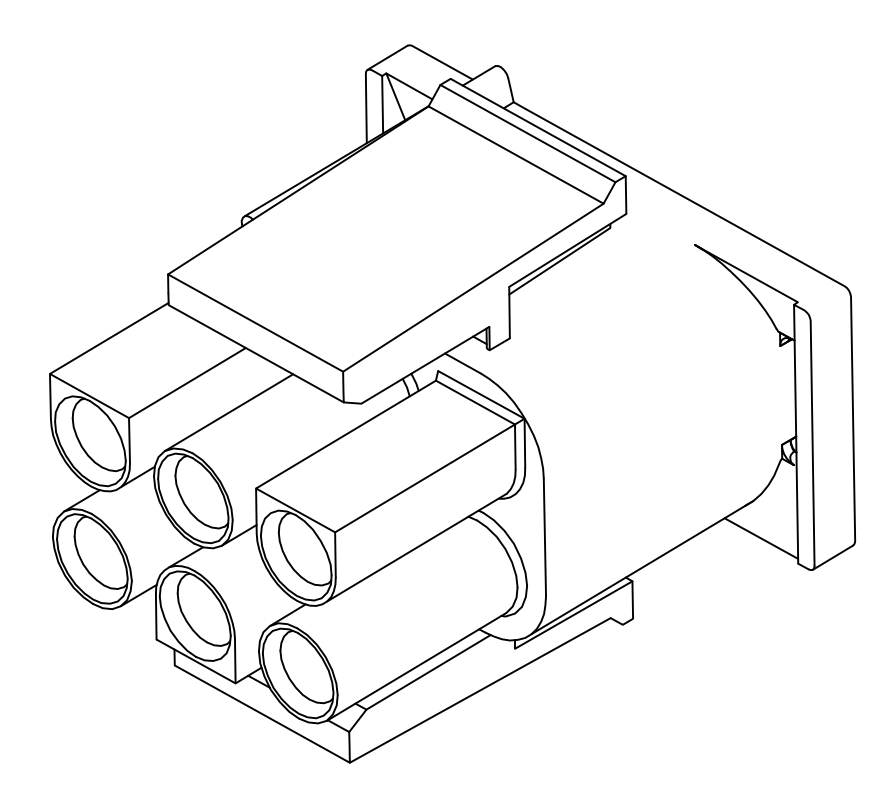

27.43	1.080
20.32	.800
13.97	.550
11.68	.460
0.38	.015
0.13	.005
MM	IN
CONVERSION TABLE	






3-DIMENSIONAL MODEL
NTS

8 SUPERSEDED BY 1-480704-0	8	OBSOLETE	BLACK	1-480704-9
	8		GRAY	1-480704-8
	8		BLUE	1-480704-6
	8	OBSOLETE	GREEN	1-480704-5
	8		YELLOW	1-480704-4
	8	OBSOLETE	ORANGE	1-480704-3
			RED	1-480704-2
			BROWN	1-480704-1
			NATURAL	1-480704-0
			COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER	23MAR05	 TE Connectivity		
		CHK S. RIDGILL	23MAR05			
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD S. RIDGILL	23MAR05	NAME		
		PRODUCT SPEC		PLUG, 6 CIRCUIT, UNIVERSAL MATE-N-LOK(TM)		
	0.13 1.0 2.0 3.0 4.0 5.0 6.0 7.0 8.0 9.0 10.0 11.0 12.0 13.0 14.0 15.0 16.0 17.0 18.0 19.0 20.0 21.0 22.0 23.0 24.0 25.0 26.0 27.0 28.0 29.0 30.0 31.0 32.0 33.0 34.0 35.0 36.0 37.0 38.0 39.0 40.0 41.0 42.0 43.0 44.0 45.0 46.0 47.0 48.0 49.0 50.0 51.0 52.0 53.0 54.0 55.0 56.0 57.0 58.0 59.0 60.0 61.0 62.0 63.0 64.0 65.0 66.0 67.0 68.0 69.0 70.0 71.0 72.0 73.0 74.0 75.0 76.0 77.0 78.0 79.0 80.0 81.0 82.0 83.0 84.0 85.0 86.0 87.0 88.0 89.0 90.0 91.0 92.0 93.0 94.0 95.0 96.0 97.0 98.0 99.0 100.0	APPLICATION SPEC		SIZE		
				CAGE CODE		
MATERIAL NYLON,UL 94V-2		FINISH -		DRAWING NO		
		WEIGHT		RESTRICTED TO		
		CUSTOMER DRAWING		SCALE		
				SHEET		
				REV		
				AP4		

LOC	DIST	REVISIONS				
CM	00	REV	LTR	DESCRIPTION	DATE	DWN
				SEE SHEET 1		

1. STAMP NUMBERS 3.18 HIGH AT WIRE END OF HOUSING (12 POINT DAVID TYPE).
2. CHARACTERS TO BE POSITIONED ON HOUSING TO BE READ FROM WIRE END ONLY.
3. VIOLET,BLACK,BROWN,AND BLUE COLORED BLOCKS TO BE STAMPED WITH WHITE CHARACTERS. ALL OTHER COLORED BLOCKS TO BE STAMPED WITH BLACK CHARACTERS.

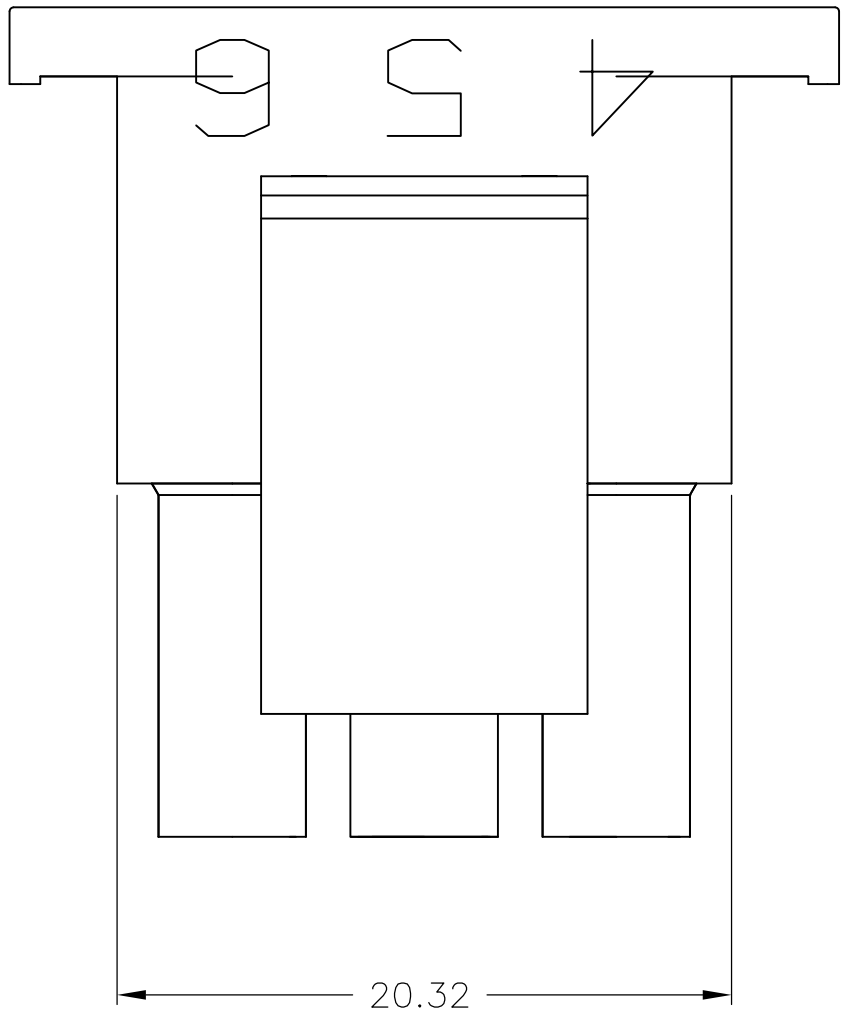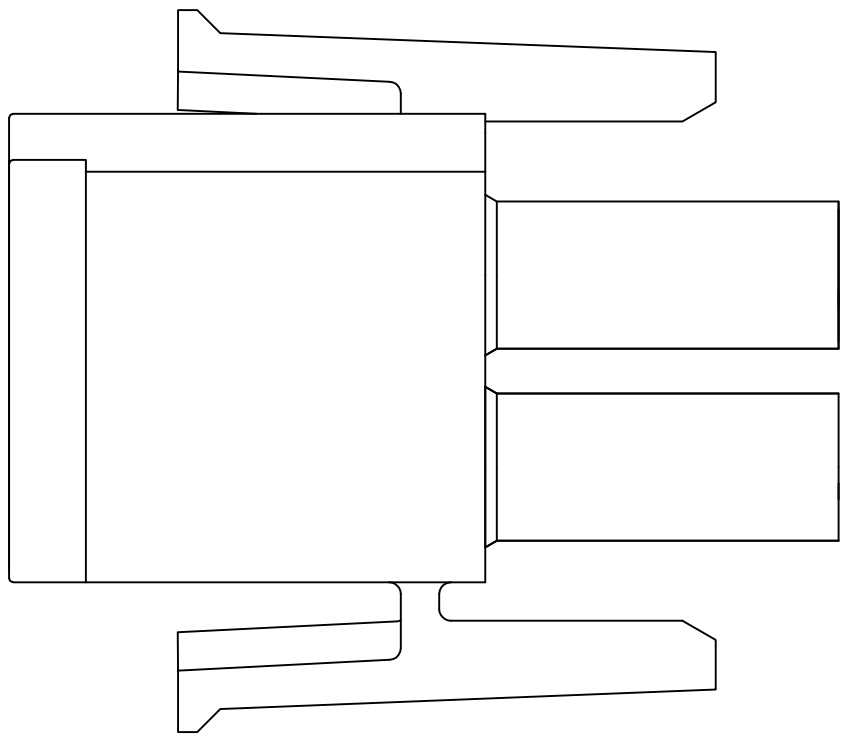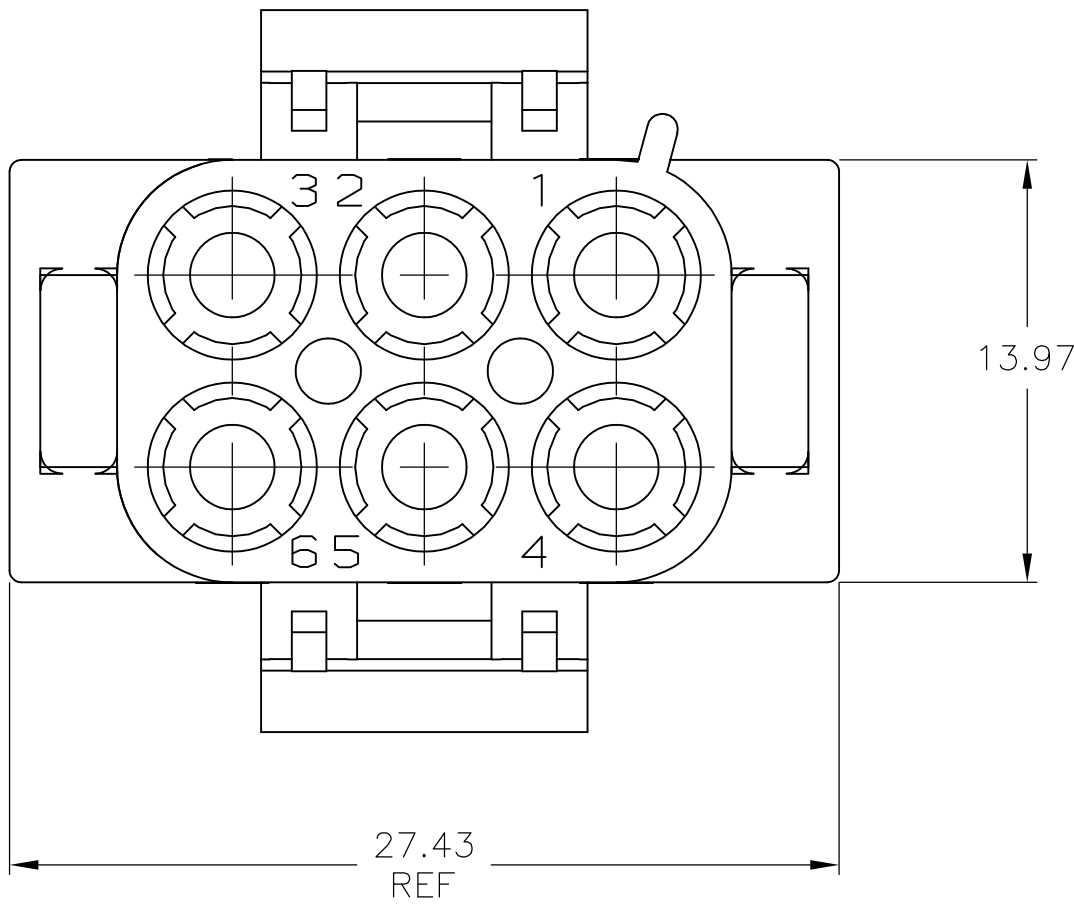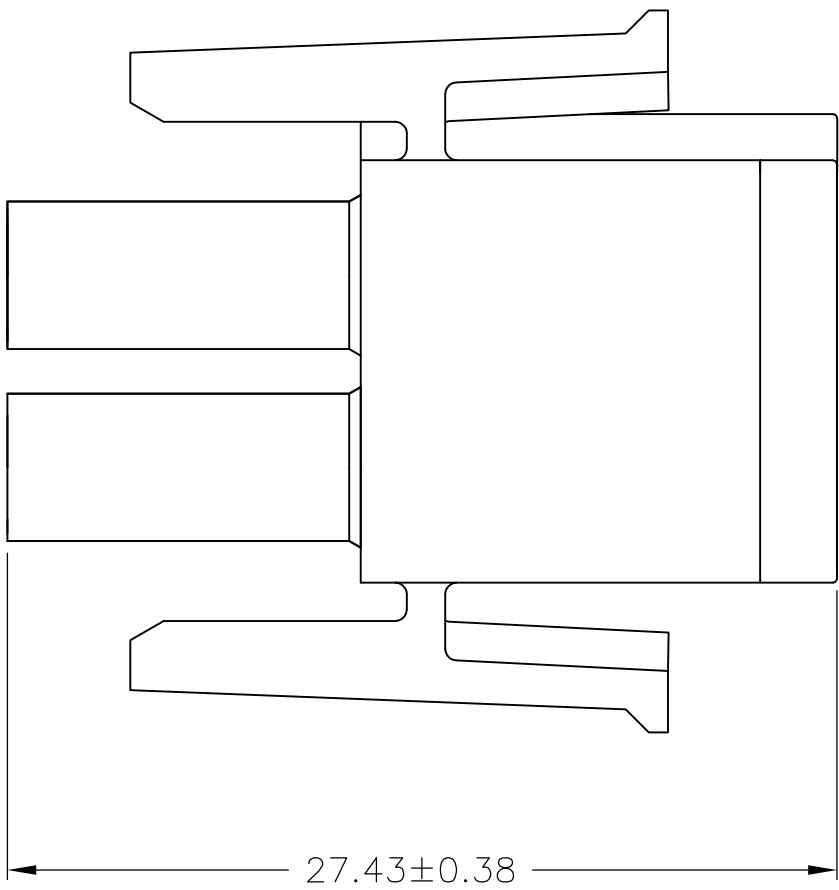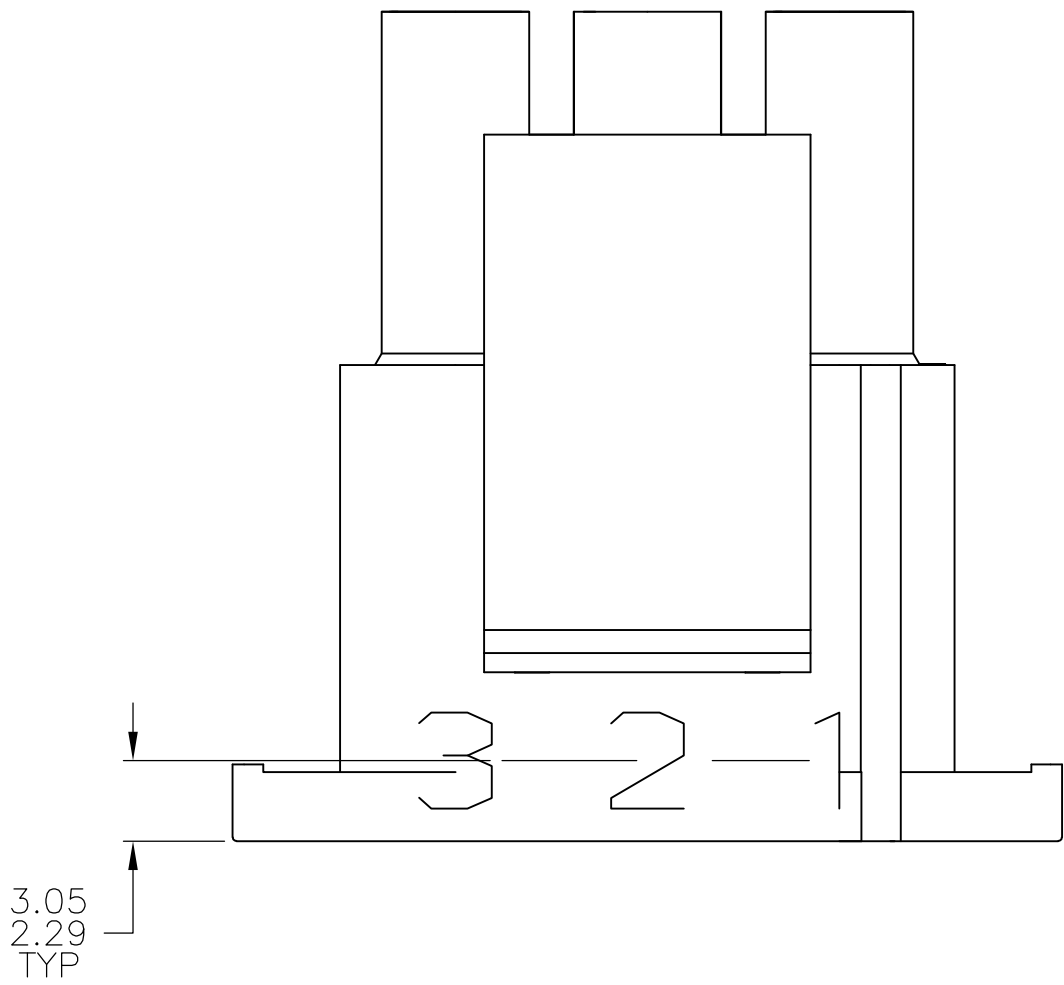

3.05	.120	27.43	1.080
2.29	.090	20.32	.800
0.38	.015	13.97	.550
0.13	.005	3.18	.125
MM	IN	MM	IN

CONVERSION TABLE

NATURAL	2-480704-0
COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 23MAR05	TE Connectivity	
		CHK S. RIDGILL 23MAR05		
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD S. RIDGILL 23MAR05	NAME	PLUG, 6 CIRCUIT, UNIVERSAL MATE-N-LOK(TM)
		PRODUCT SPEC		
	0.13 1.0 2.0 3.0 4.0 ANGLES FINISH	APPLICATION SPEC	SIZE	RESTRICTED TO
		WEIGHT	CAGE CODE	DRAWING NO
MATERIAL			A100779	480704
CUSTOMER DRAWING			SCALE	4:1
			SHEET	2 OF 2
			REV	AP4