

B


A

ASSEMBLY FORMAT REV. 6/3/05

2


1

DATE	REV	ECN	APP'D. BY
5/29/19	A0	RELEASED	-
-	-	-	-

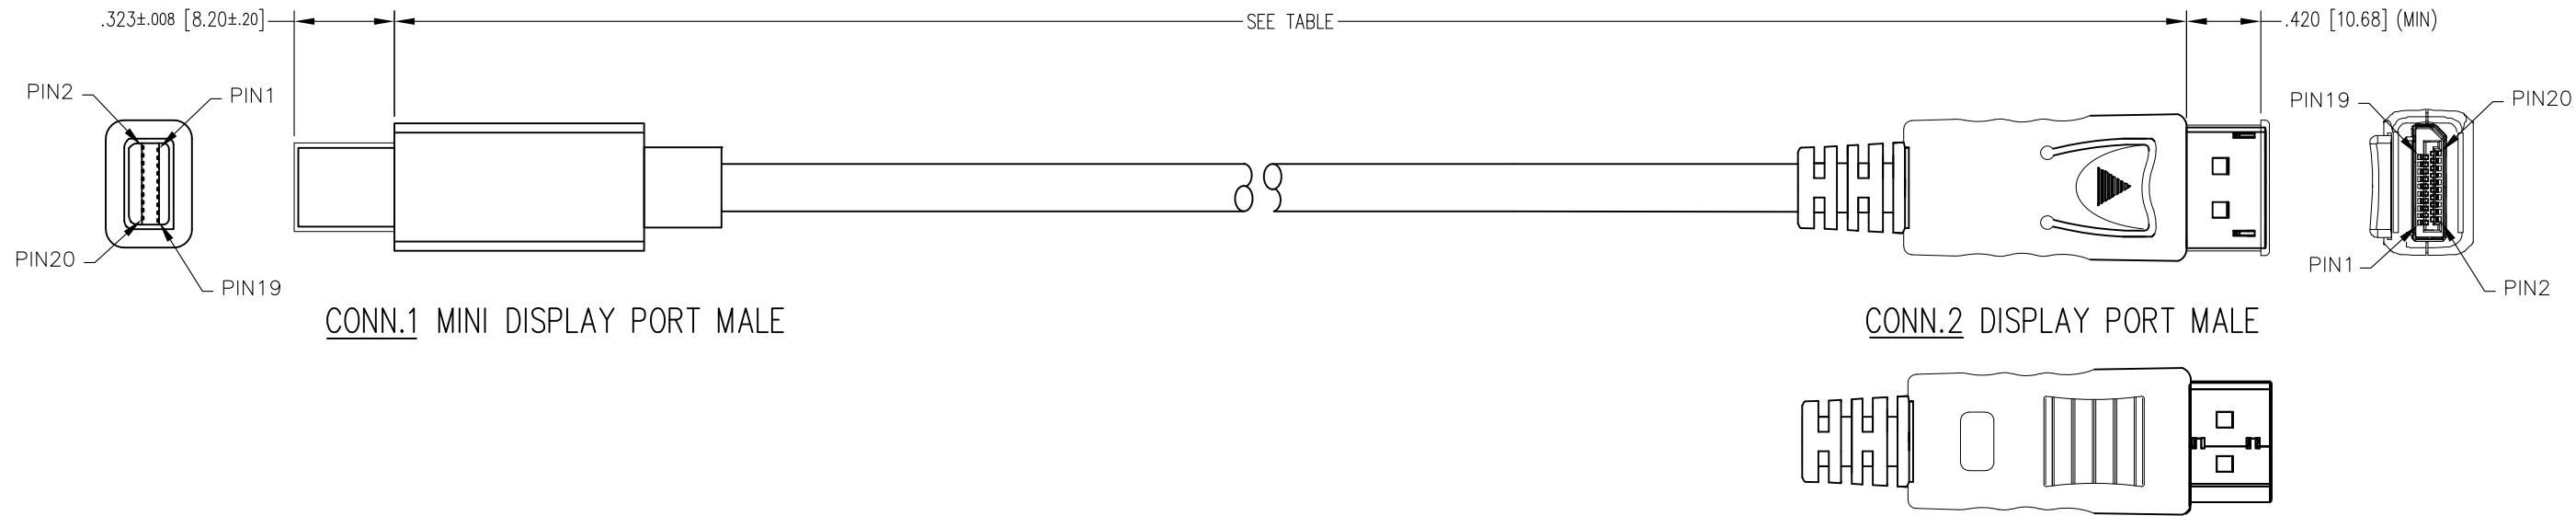


NOTES:


- CONNECTOR COMPONENTS:
TRANSPARENT DUST COVER
INSIDE MOLDING: PE
STRAIN RELIEF MOLDING: 45P PVC, BLACK
OUTSIDE MOLDING: ABS, WHITE
SHELL PLATING: GOLD FLASH
CONTACT: GOLD PLATING
DISPLAY PORT UL20276 [32AWG(7/0.08TC)*1PR+EAM)*5
+32AWG(7/0.08TC)*5C+D(BC)+AB 85% (16/7/0.12AL)
OD: 0.19 [4.8] COLOR: WHITE
- ELECTRICAL TESTING:
100% OPEN & SHORT & CONTINUITY WIRE TEST
CONTACT RESISTANCE: 2 OHM(MAX)
INSULATION RESISTANCE: 10M OHM(MIN)
HI-POT TEST: DC 100V/10ms
- PACKAGING
ONE CABLE PER BAG




PIN ASSIGNMENT

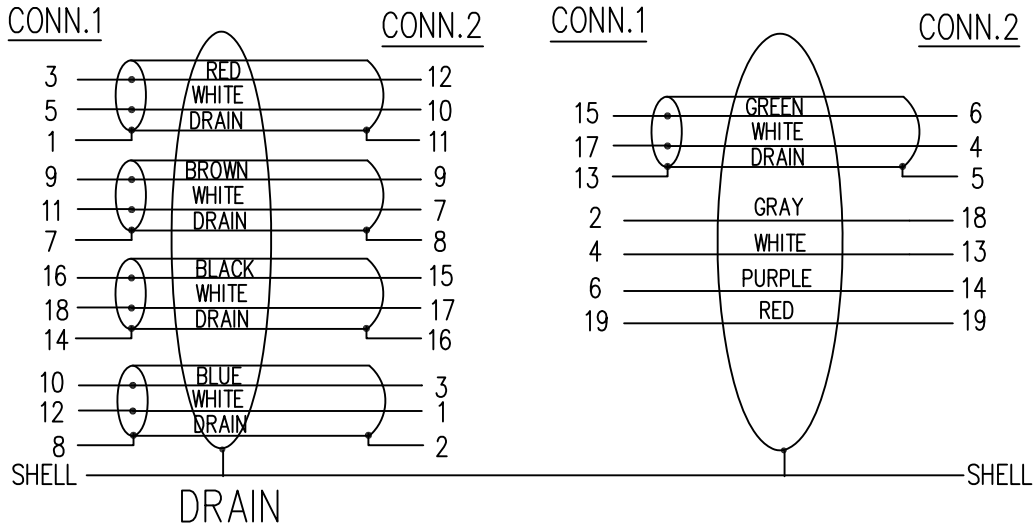

P/N	LENGTH
BC-DM003F	36 $\pm$ 1.2 [915 $\pm$ 30]
BC-DM006F	72 $\pm$ 1.2 [1830 $\pm$ 30]
BC-DM010F	120 $\pm$ 1.6 [3050 $\pm$ 40]



THIRD ANGLE PROJECTION
DO NOT SCALE DRAWING DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS: INCHES [METRIC]
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE $\pm .005$ [0.13] ANGLES ARE $\pm 1^\circ$
SHEET NO. 1 OF 1



206 Van Vorst Street
Jersey City, NJ 07302
+1 201 432 0463
<http://www.belfuse.com>

TITLE: MINI DISPLAY PORT MALE TO DISPLAY PORT MALE
CABLE

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON
ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF
BEL FUSE, INC. AND SHALL NOT BE REPRODUCED,
COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN
CONSENT OF BEL FUSE, INC.

DRN BY: JMM	DATE 05/16/19
APPD BY: ADB	DATE 05/29/19
DWG NO. CT999193	REV. A0

AutoCAD

1

2

B

A