


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	04JUN2015	DW	CW

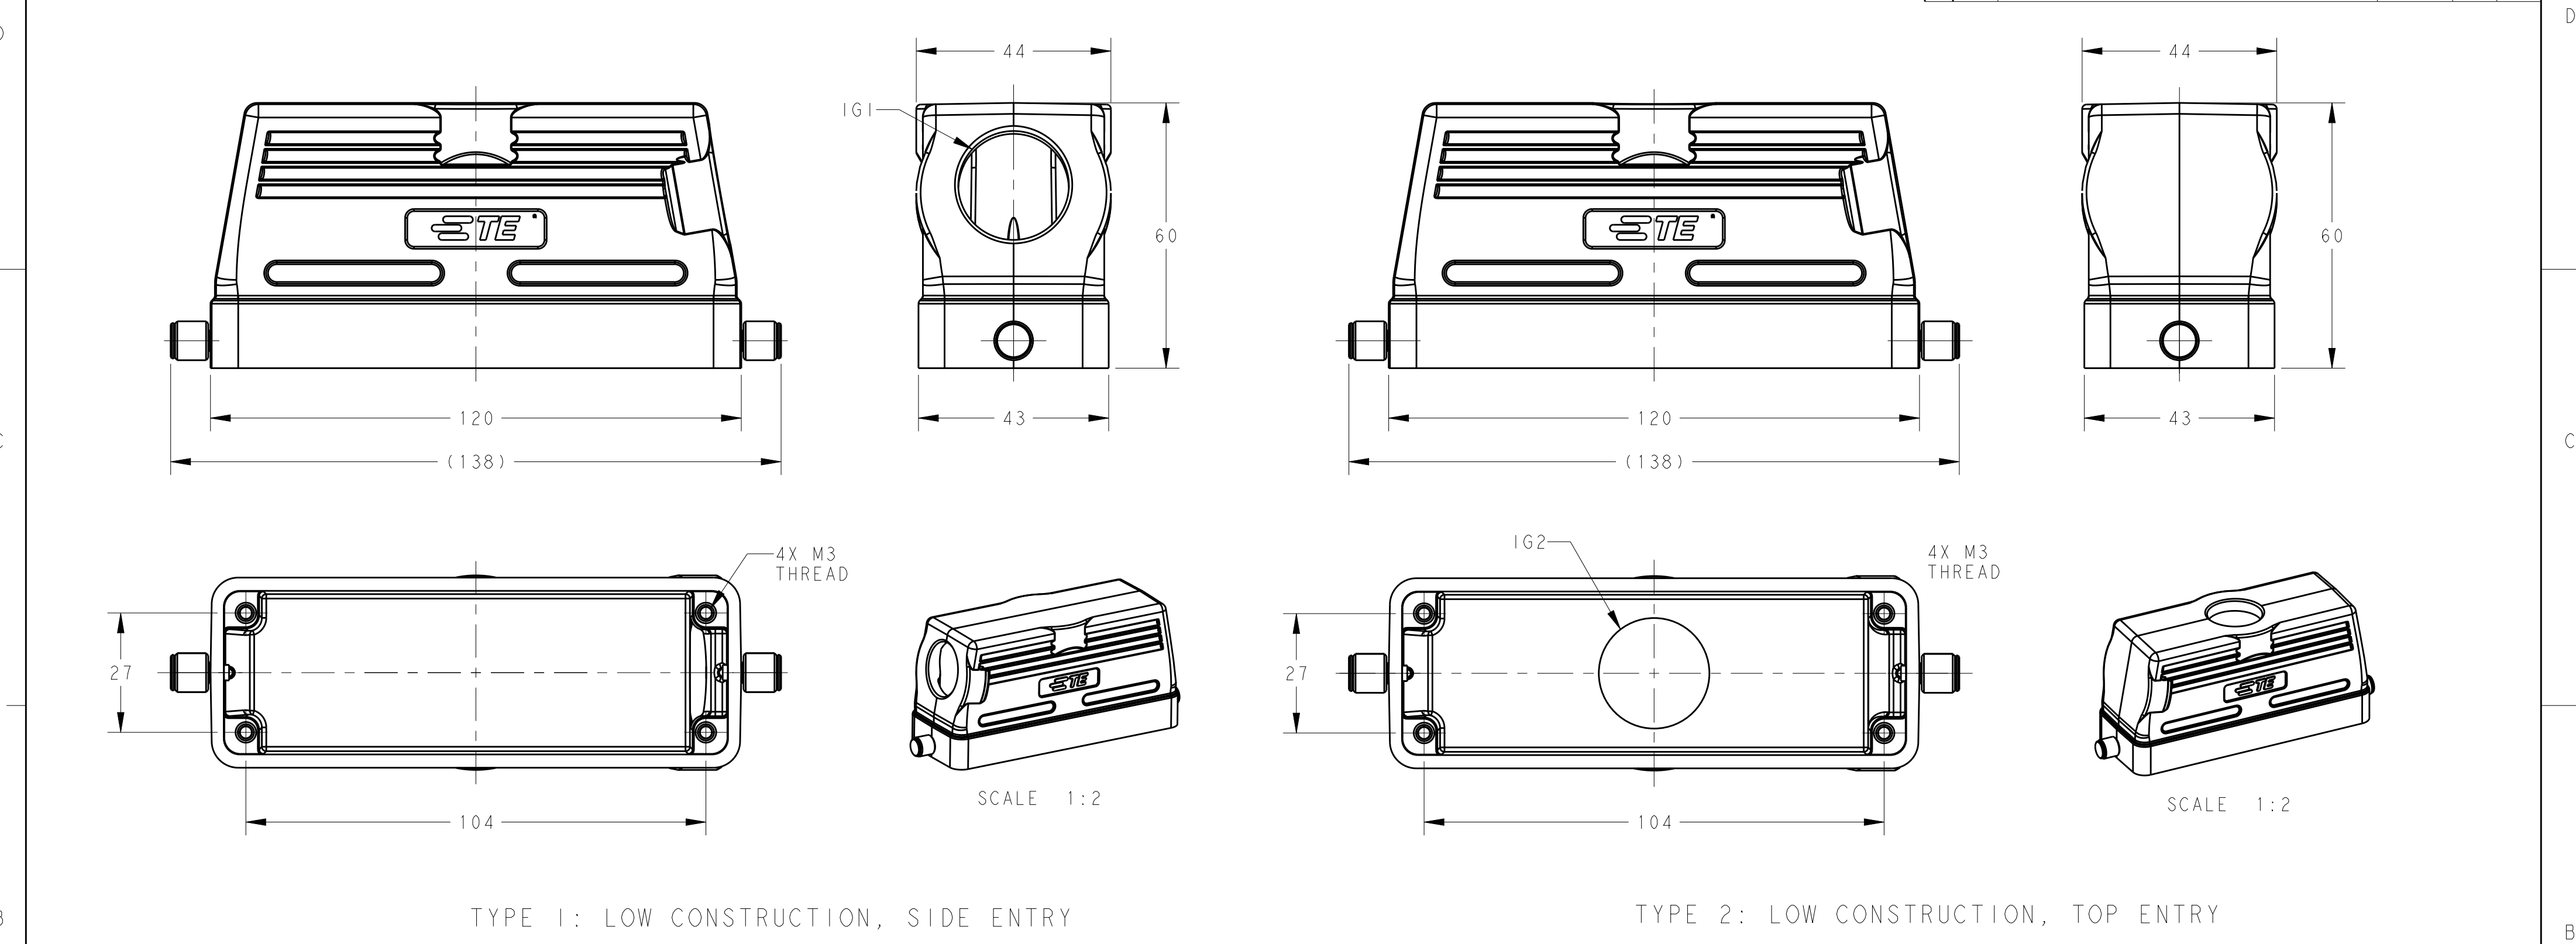

NOTES:

1. TECHNICAL CHARACTERISTICS:

HOOD MATERIAL: DIE CAST ALUMINIUM ALLOY

SURFACE: POWDER COATED, GREY

OPERATION TEMPERATURE: -40-+125°C

DEGREE OF PROTECTION: IP65 (MATED)

注释:

1. 技术参数:

上壳材料: 铝合金


表面处理: 粉末涂层, 灰色

工作温度: -40-+125°C

防护等级: IP65(配合)

T1310240121-000	TYPE 1	H24B-TS-RO-PG21	PG21	-
T1310240125-000		H24B-TS-RO-M25	M25	-
T1310240132-000		H24B-TS-RO-M32	M32	-
T1320240121-000	TYPE 2	H24B-TG-RO-PG21	-	PG21
T1320240125-000		H24B-TG-RO-M25	-	M25
T1320240132-000		H24B-TG-RO-M32	-	M32
PART NUMBER	TYPE	DESCRIPTION	IG1	IG2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 04JUN2015 David Wang	TE Connectivity	
		CHK 04JUN2015 Chris Wang		
		APVD 04JUN2015 Xiang Xu	NAME H24B-TS/TG/TSH/TGH-RO-M/PG	
DIMENSIONS:		PRODUCT SPEC	SIZE CAGE CODE DRAWING NO	
mm		108-137013	A200779	
		APPLICATION SPEC	RESTRICTED TO	
		114-137013	C-T13X02401XX000	
MATERIAL		WEIGHT	SCALE 1:1 SHEET 1 OF 2 REV A	
-		-		
-		-		
		Customer Drawing		

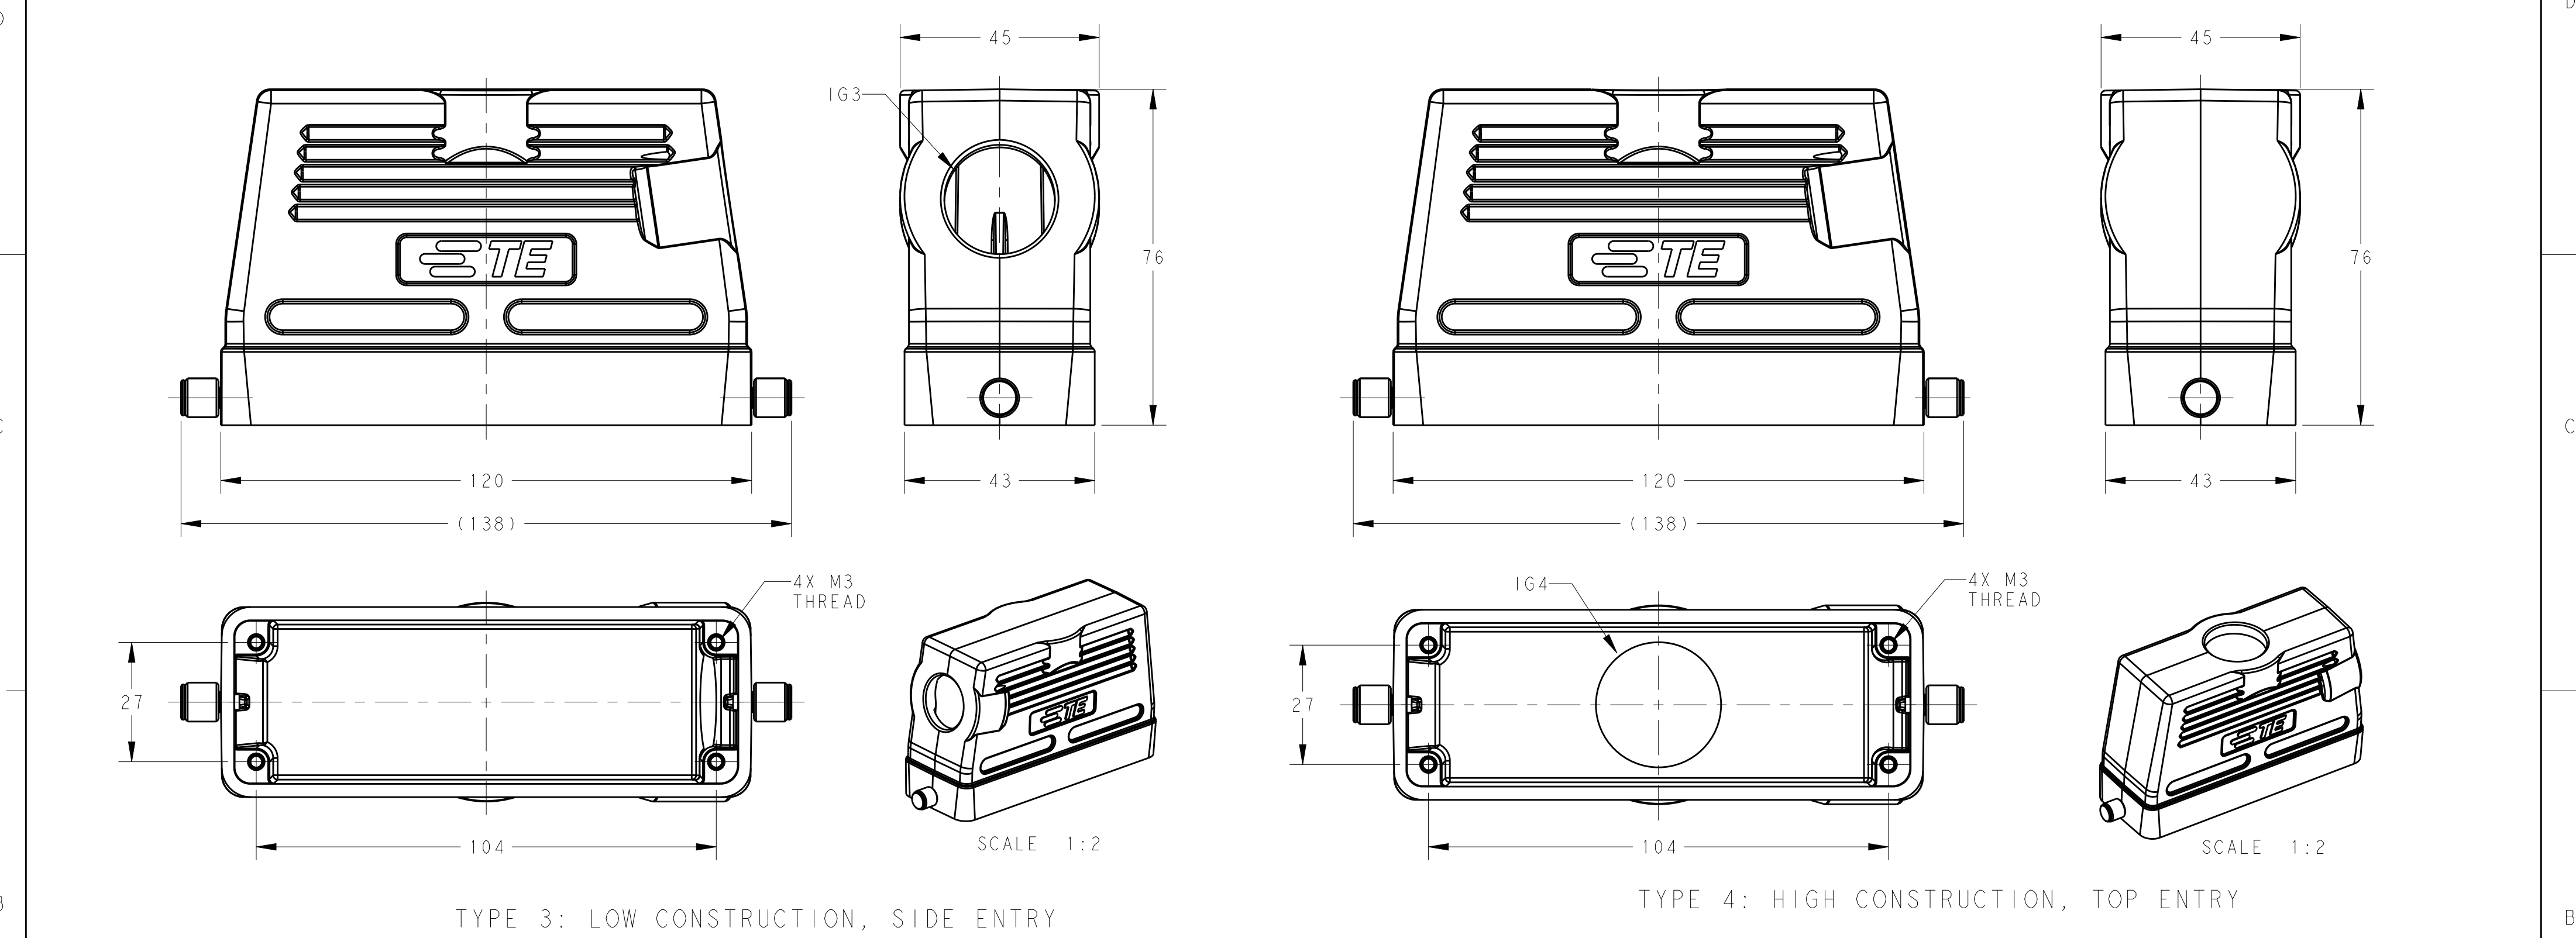

NOTES:
SEE SHEET 1

T1330240121-000	TYPE 3	H24B-TSH-RO-PG21	PG21	-
T1330240125-000		H24B-TSH-RO-M25	M25	-
T1330240129-000		H24B-TSH-RO-PG29	PG29	-
T1330240132-000		H24B-TSH-RO-M32	M32	-
T1330240140-000		H24B-TSH-RO-M40	M40	-
T1340240121-000	TYPE 4	H24B-TGH-RO-PG21	-	PG21
T1340240125-000		H24B-TGH-RO-M25	-	M25
T1340240129-000		H24B-TGH-RO-PG29	-	PG29
T1340240132-000		H24B-TGH-RO-M32	-	M32
T1340240140-000		H24B-TGH-RO-M40	-	M40
PART NUMBER	TYPE	DESCRIPTION	IG3	IG4

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN04JUN2015David Wang

CHK04JUN2015Chris Wang

APVD04JUN2015Xiang Xu

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±

1 PLC ±

2 PLC ±

3 PLC ±

4 PLC ±

ANGLES ±

FINISH

MATERIAL

-

-

PRODUCT SPEC108-137013

APPLICATION SPEC114-137013

WEIGHT-

Customer Drawing

TE Connectivity

NAMEH24B-TS/TG/TSH/TGH-RO-M/PG

SIZEA2

CAGE CODE00779

DRAWING NO.C-T13X02401XX000

RESTRICTED TO-

SCALE1:1

SHEET2 OF 2

REV A