


FEATURES

Non-Polarized
 24 Volt DC Operation
 12V AC or DC Operation
 CRI ≥ 80 (WW)
 ≥ 70 (CW)

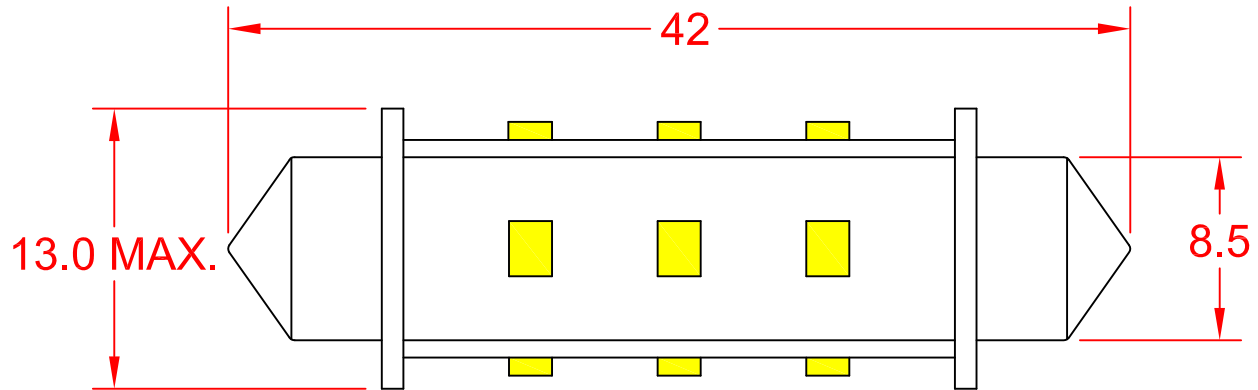

SPECIFICATIONS

PARAMETERS	SYMBOL	VALUES			UNIT
		MIN	TYP	MAX	
Input Voltage	Vin	10	12	30	VDC
Input Current	lin	0.02	0.05	0.07	A
Power Consumption	P		0.6		W
CRI	Ra	≥ 80 (Warm White) / ≥ 70 (Cool White)			
CCT	- -	3000 (Warm White) / 6000 (Cool White)			K
Luminous Intensity	Φ	50-60 (Warm White) 40-50 (Cool White)			Lm
Operating Temperature	Topr	-20	25	40	°C

ACCESSORIES

SOCKET: 2910F-47

JKL PART NUMBERS: LE-3042-02-CW and LE-3042-02-WW

				DIMENSIONS ARE IN MILLIMETERS TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- REF. 2 PL +/- REF. ANGLE +/-		JKL COMPONENTS CORPORATION									
		THIRD ANGLE PROJECTION				TITLE NON-POLARIZED 360 DEGREES LED FESTOON LAMP									
B SPECIFICATIONS CHANGES		6/2/14		DRAWN BY L. WENGSTROM		APPVD BY S.C.		DATE 6/2/14		SIZE A		FSCM NO. 55335		DRAWING NO. LE-3042-02 MULTI	
A ADD FEATURES/ACCESS, CHNG SPEC		11/4/13													
RELEASED		10/8/13													
REV. NO.		DESCRIPTION/ECO NUMBER		APPVD DATE		- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED		SCALE NONE		RELEASED DATE 10/8/13		REVISION DATE 6/2/14		REV. NO. B SHEET 1 OF 1	