


# FEATURES

- Non-Polarized
- 24 Volt DC Operation
- 12V AC or DC Operation
- CRI  $\geq 80$  (WW)
- $\geq 70$  (CW)

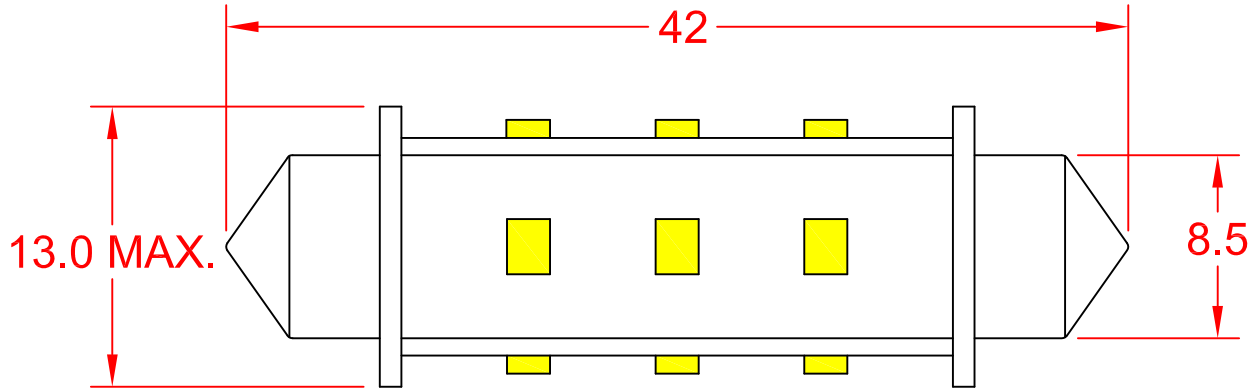

# SPECIFICATIONS

PARAMETERS	SYMBOL	VALUES			UNIT
		MIN	TYP	MAX	
Input Voltage	Vin	10	12	30	VDC
Input Current	lin	0.02	0.05	0.07	A
Power Consumption	P		0.6		W
CRI	Ra	$\geq 80$ (Warm White) / $\geq 70$ (Cool White)			
CCT	- -	3000 (Warm White) / 6000 (Cool White)			K
Luminous Intensity	$\Phi$	50-60 (Warm White) 40-50 (Cool White)			Lm
Operating Temperature	Topr	-20	25	40	°C

# ACCESSORIES

SOCKET: 2910F-47

JKL PART NUMBERS: LE-3042-02-CW and LE-3042-02-WW

		DIMENSIONS ARE IN MILLIMETERS TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- REF. 2 PL +/- REF. ANGLE +/-		<b>JKL COMPONENTS CORPORATION</b>			
DRAWN BY L. WENGSTROM		APPVD BY S.C.		DATE 6/2/14		TITLE NON-POLARIZED 360 DEGREES LED FESTOON LAMP	
REV. NO.		DESCRIPTION/ECO NUMBER		APPVD DATE		SCALE NONE	
B SPECIFICATIONS CHANGES 6/2/14		A ADD FEATURES/ACCESS, CHNG SPEC 11/4/13		RELEASED 10/8/13		FSCM NO. 55335 DRAWING NO. LE-3042-02 MULTI	
REV. NO.		DESCRIPTION/ECO NUMBER		APPVD DATE		RELEASED DATE 10/8/13	
REV. NO.		DESCRIPTION/ECO NUMBER		APPVD DATE		REVISION DATE 6/2/14	
REV. NO.		DESCRIPTION/ECO NUMBER		APPVD DATE		SHEET 1 OF 1	