




REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	29APR2015	DL	CW

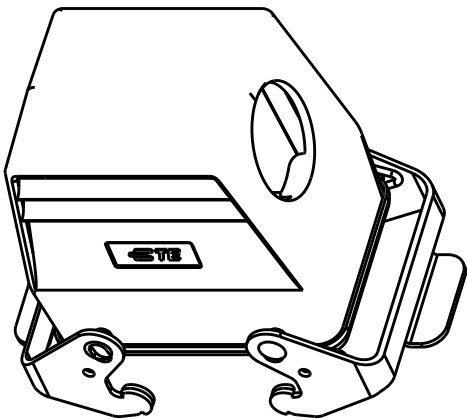

SCALE 1:2

NOTES:
1. TECHNICAL CHARACTERISTICS:
BODY MATERIAL: DIE CAST ALUMINIUM ALLOY
SURFACE TREATMENT: POWDER-COATED, GRAY
OPERATION TEMPERATURE: -40-+125°C
DEGREE OF PROTECTION: IP65 (MATED)

注释:
1. 技术参数:
主体材料: 铝合金
表面处理: 粉末喷涂, 灰色
工作温度: -40-+125°C
防护等级: IP65(配合)

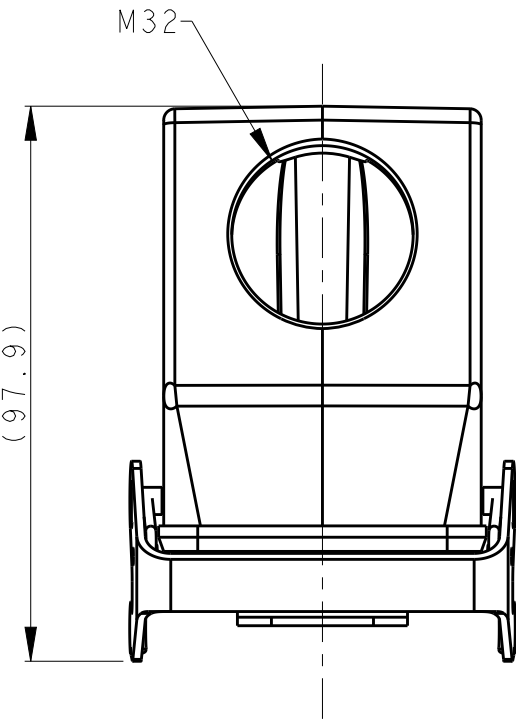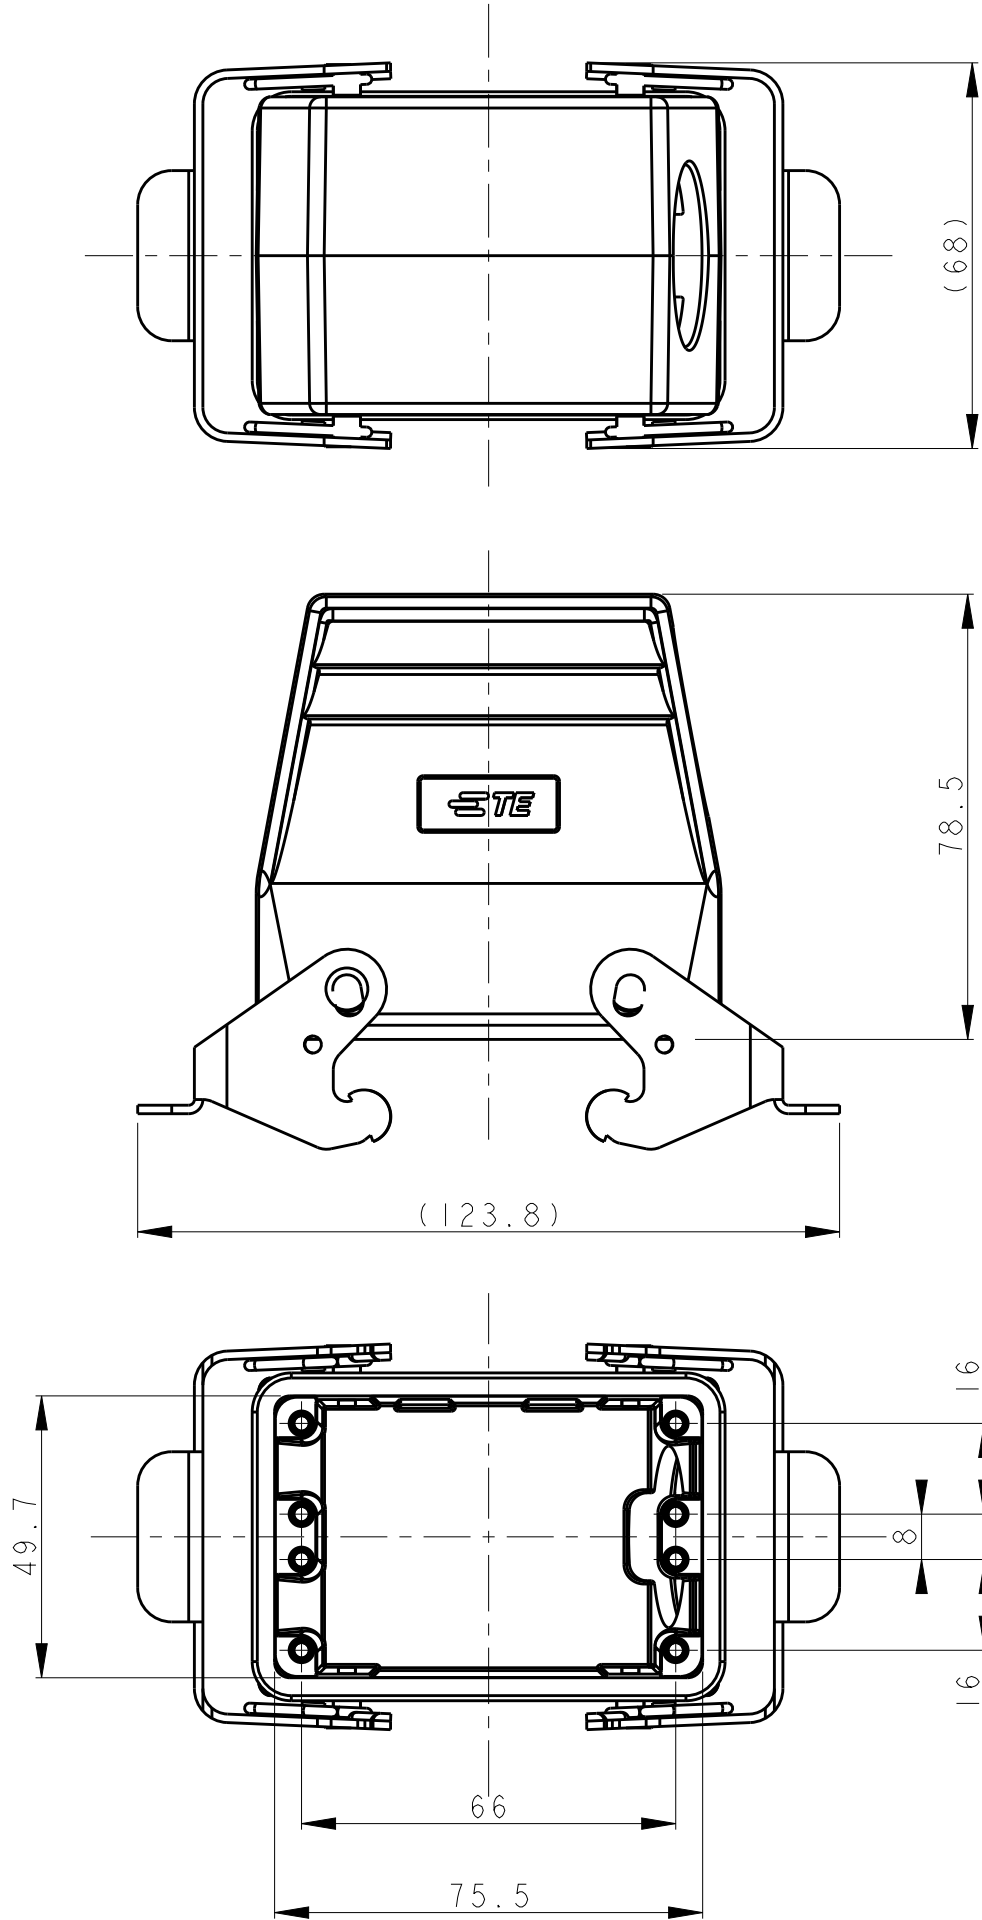

T1729322132-000	H32A-TSBF-M32	M32
ASSEMBLY PART NUMBER	ASSEMBLY PART DESCRIPTION	PG/M

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID LI 29APR2015	TE Connectivity H32A-TSBF-M32		
DIMENSIONS: mm		CHK CHRIS WANG 29APR2015			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD XU XIANG 29APR2015			
0 PLC ±-		PRODUCT SPEC 108-137010			
1 PLC ±-		APPLICATION SPEC 114-137010	NAME H32A-TSBF-M32		
2 PLC ±-		WEIGHT -	SIZE A3	CAGE CODE -	DRAWING NO C-T1729322132000
3 PLC ±-		CUSTOMER DRAWING	SCALE 3:4	SHEET 1 OF 1	REV A
4 PLC ±-					
ANGLES ±-					
FINISH -					
MATERIAL -					