
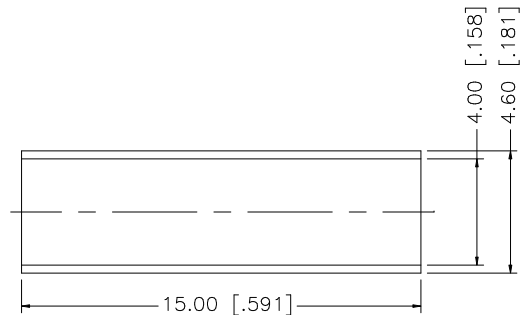
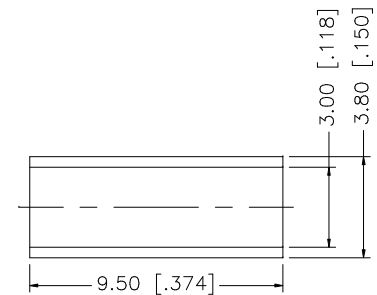

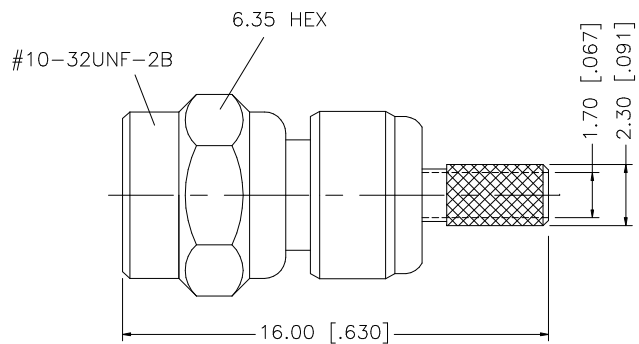


REV.	DATE	DESCRIPTION
A	09/04/01	INCREASE FERRULE LENGTH TO 9.5 [.374]
B	04/31/03	UPDATE DRAWING FORMAT

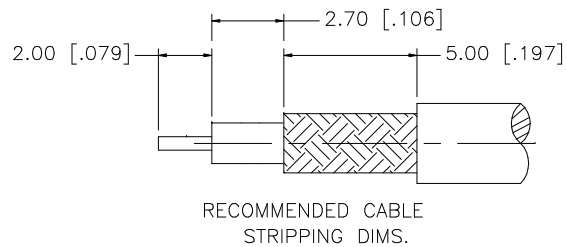

CRIMP NOTES:

1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex				
7						DRAWN	G.R.S.					04/31/03
6						CHECKED						
5	HEAT SHRINK TUBE		BLACK	1		UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	ISSUED		PART DESCRIPTION			
4	FERRULE	COPPER	NICKEL	1	SHEET		1 OF 1	SMC CRIMP PLUG (RG-174/U, 188A/U, 316/U CABLE)				
3	CONTACT PIN	BER. COPPER	GOLD	1				PART NO.				
2	INSULATOR	TEFLON	NATURAL	1				152100				
1	BODY	BRASS	NICKEL	1		CAD FILE		DWG. NO.	152100.DWG	REV. B	SIZE A	SCALE NA
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	C:/152/152100.DWG						