




# Jewel<sup>®</sup>

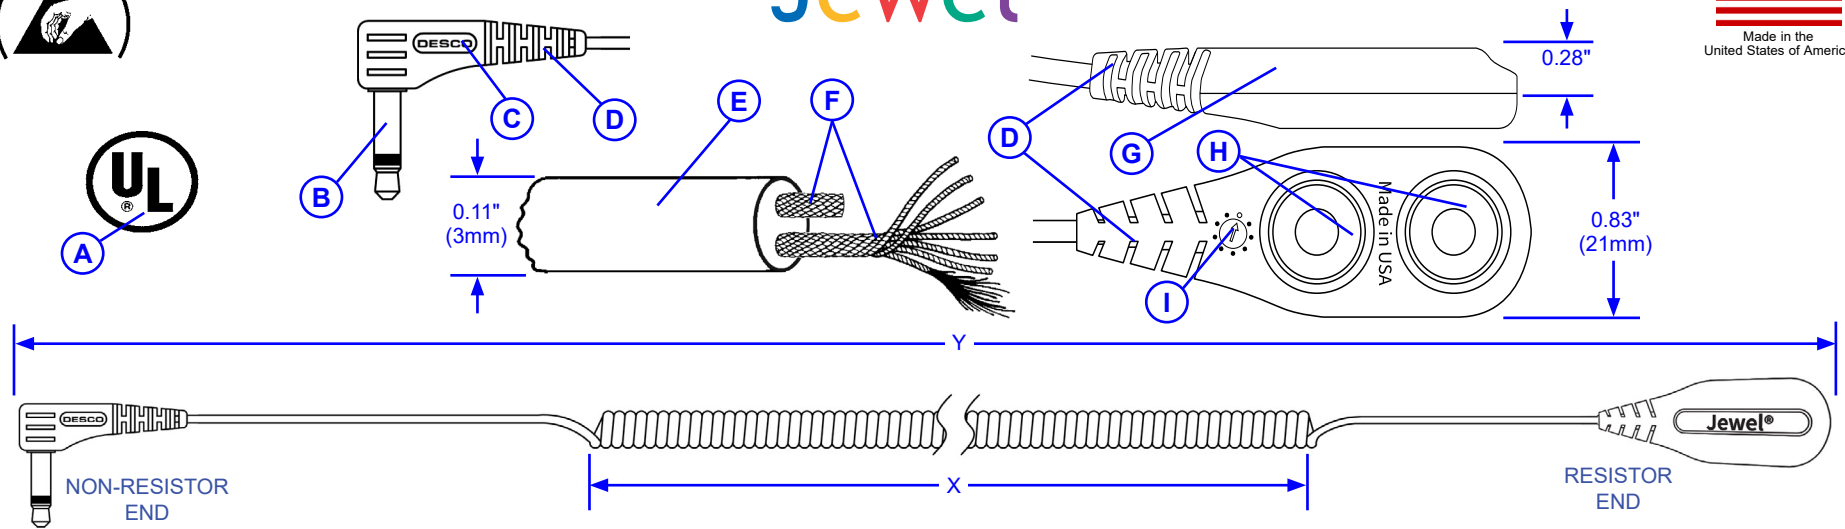

### Meets required limits of ANSI/ESD S20.20 and requirements of ANSI/ESD S1.1.

- A. Underwriters Laboratory Listing 90P1C.
- B. 3.5mm phono plug. Compatible with [Desco Dual-Wire Continuous Monitors](#) and other manufacturers.
- C. Desco logo molded in compliance with ANSI/ESD S1.1.
- D. Thermoplastic elastomer strain relief molded on.
- E. Relaxed retraction coil cord reduces tug on wearer's wrist. Black PVC insulation. Break load average 30 pounds.
- F. Dual T-3067 tinsel conductor. Consists of stranded polyester wrapped in copper. Equivalent to 29 gauge (cir mil and/or ohms).
- G. 1 megohm (±5%) current limiting resistors on both conductors.
- H. Spring loaded 4mm medical snap socket. Spring separation .125" - .165". Provides 1-5 pound breakaway from .160" snap studs (ESD S1.1). Compatible with Desco [Dual-Wire Wristbands](#) ONLY (not including MagSnap<sup>®</sup> or MagSnap360<sup>™</sup> products).
- I. Date coded with date of manufacture in compliance with ANSI/ESD S1.1.

Item	Retracted Length		Extended Length	
	X	Y	Nominal	Max
<a href="#">09160</a>	12 in (0.3m)	20 in (0.5m)	6 ft (1.8m)	8.5 ft (2.6m)
<a href="#">09161</a>	24 in (0.6m)	32 in (0.8m)	12 ft (3.7m)	18 ft (5.5m)
<a href="#">09162</a>	30 in (0.76m)	38 in (0.96m)	15 ft (4.6m)	22 ft (6.7m)

\*U.S. Patents 6,052,053 and 6,205,408

Unless otherwise noted, tolerance ±10%  
Specifications and procedures are subject to change without notice.

# DESCO

## JEWEL<sup>®</sup> DUAL-WIRE COIL CORD

DESCO WEST: 3651 WALNUT AVE., CHINO, CA 91710 WEB SITE: [Desco.com](http://Desco.com)  
PHONE (909) 627-8178

DESCO EAST: ONE COLGATE WAY, CANTON, MA 02021-1407  
PHONE (781) 821-8370

**DRAWING  
NUMBER**  
09160

**DATE:**  
November  
2016