

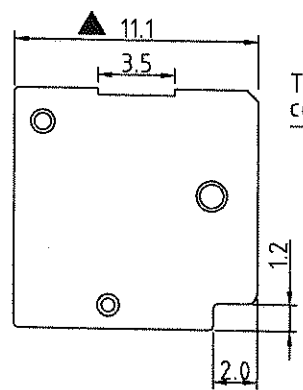


REV	SIGN	DATE	DESCRIPTION	APPROVER
B		2017.09.28	The first release	Zhihua
RoHs Compliant				
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				

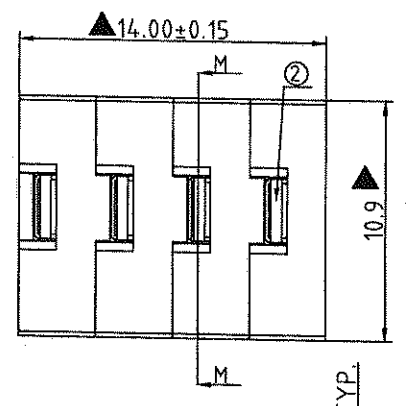

The color of lever is consistent with body's

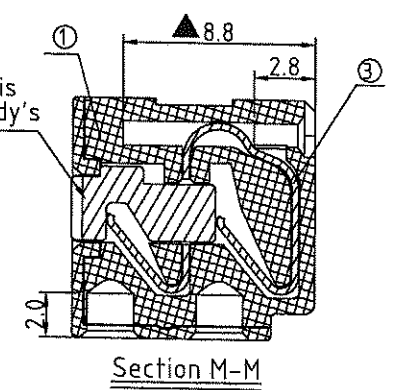



Material

- Item① Insulating body(middle): Thermoplastic (UL94V-0)
- Item② Insulating lever: Thermoplastic (UL94V-0)
- Item③ Spring clamp: Phosphor Bronze, Tin Plated
- Item④ Insulating cover: Thermoplastic (UL94V-0)
- Item⑤ Insulating body(side): Thermoplastic (UL94V-0)

Electrical

cULus

- Voltage rating: 300V
- Current rating: 2A
- Wire range : 2×AWG 20~26 (Solid wire)
- Wire strip length: 5~6mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Safety Approval: cULus
- Critical dimension: ▲

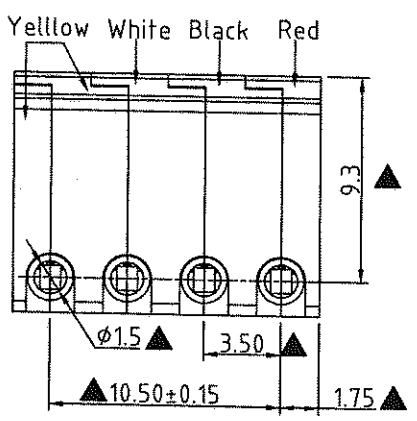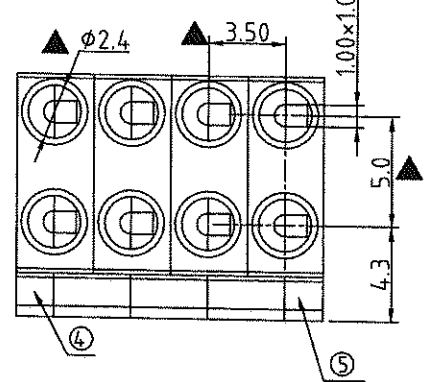

code of color:

Yellow	White	Black	Red
RAL1018/A	RAL1102	RAL9005	RAL3001/D

Amphenol ANYTEK				CUSTOMER COPY			
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD							
TITLE	NU 3.5mm series						
PART NO.	NU0400C0001AG			DWG NO.	8NU0004		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			
		Zhihua 2017.09.28	Zhihua 2017.09.28				
				SHEET: 01/01			
				UNIT: mm		Tolerance	
				SCALE: NONE		X. ±0.50	
				REV: B		X.X ±0.30	
						X.XX ±0.10	
						X° ±1°	